

## Through-hole LED

## Flashing $\varnothing$ 3mm



- flashing frequency 2.5-1.5Hz
- power dissipation 200mW
- RoHS compliant




Part Number	Peak Wavelength	Intensity (mcd)		Angle (deg)	Voltage (V)			Current (mA)	Lens Colour
		min	max		min	typ	max		
L3-G3FF	565 nm	5.0	20.0	60°	3.5	9-12	13.0	6-70	green diffused
L3-R3FF	625 nm	12.5	32.0	60°	3.5	9-12	13.0	6-70	red diffused
L3-Y3FF	590 nm	5.0	20.0	60°	3.5	9-12	13.0	6-70	yellow diffused

**Electro-Optical-Characteristics Ta=25°C, Forward Current: IF Typical = 38-56mA,**

Storage Temp. -50 ~+100 (°C) Operating Temp. -40 ~+70 (°C)

Detailed data sheets are available on request

### Dimensions (mm)

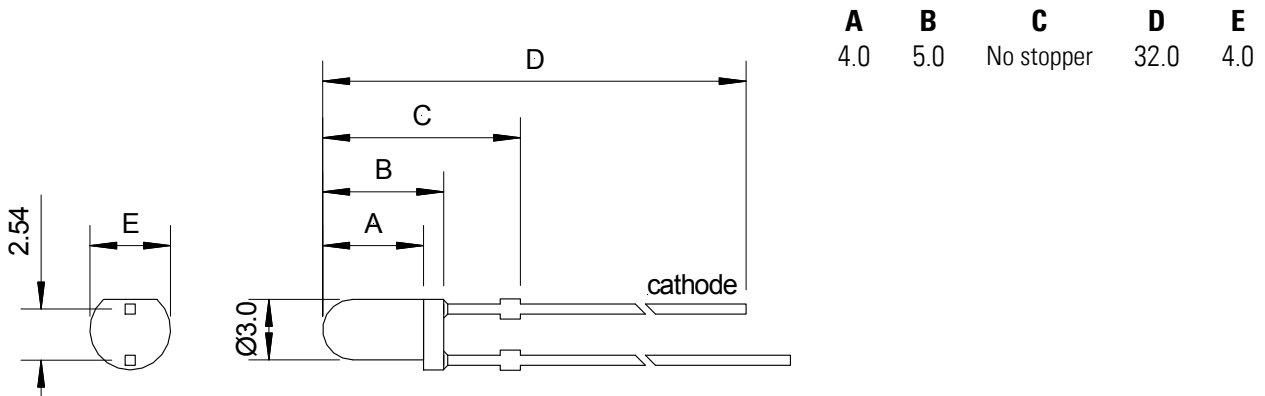

1. All specifications according to information from our manufacturers, without additional guarantee on our part
2. All dimensions are in millimetres
3. Tolerance is  $\pm 0.25$ mm unless otherwise specified
4. Specifications are subject to change without notice