
## **TEV-Series - Valve Regulated Lead Acid Battery TEV12180**

# **Data Sheet**

SPECIFICATIONS		
Nominal voltage	12	V
20-hr rate Capacity to 10.5V at 20°C	18	Ah
10-hr rate Capacity to 10.8V at 20°C	15.3	Ah
DIMENSIONS		
Length	181 (±1)	mm
Width	76 (±1)	mm
Height	167 (±2)	mm
(height over terminals)	N/A	mm
Mass (typical)	6.7	kg
TERMINAL TYPE		
Bolt terminal	5	mm
Torque	4	Nm
OPERATING TEMPERATURE RANGE		
Storage (in fully charged condition)	-20°C to +60°C	
Charge	-15°C to +50°C	
Discharge	-20°C to +60°C	
STORAGE		
Capacity loss per month at 20°C (approx)	3	%
CASE MATERIAL		
Standard Option	ABS (UL	94:HB)
Flame retardant option (FR)	ABS (UL94:V0)	
CHARGE VOLTAGE		
	13.65 (±1%)	V
Float charge voltage at 20°C	2.275 (±1%)	V/cell
Float Charge voltage temperature correction factor (for variations from the standard 20°C)	-3	mV/cell/°C
Cyclic (or Boost) charge at 20°C	14.5 (±3%) 2.42 (±3%)	V V/cell
Cyclic Charge voltage temperature correction factor (for variations from the standard 20°C)	-4	mV/cell/°C
CHARGE CURRENT		
Float charge current limit	No limit	Α
Cyclic (or Boost) charge current limit	9.00	Α
MAXIMUM DISCHARGE CURRENT		
1 second	500	Α
1 minute	180	Α
CYCLIC LIFE DATA		
100% DOD down to 80% capacity	300	cycles
75% DOD down to 80% capacity	500	cycles
50% DOD down to 80% capacity	600	cycles
25% DOD down to 80% capacity	1400	cycles
IMPEDANCE		_, 5.00
Measured at 1 kHz	7.5	mΩ
PERFORMANCE & CHARACTERISTICS	1	
Refer to the technical manual	TEV	
DESIGN LIFE	1 = V	
	3 to 5	VOOEG
EUROBAT Classification: Standard Commercial	3 10 3	years
SAFETY		



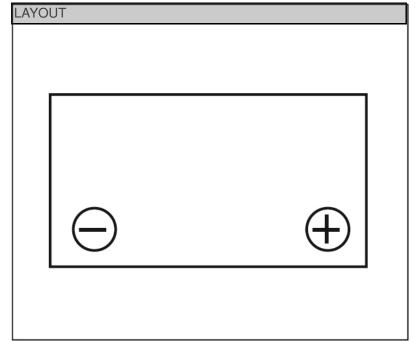

#### **3RD PARTY CERTIFICATIONS**

ISO 9001 - Quality Management Systems ISO 14001 - Environmental Management Systems

EN 18001 - OHSAS Management Systems



UNDERWRITERS LABORATORIES Inc.

#### **STANDARDS**

IEC61056 IEC60895-21/22







ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE Issue No.: V.1 / Issue Date: July 2010



YUASA BATTERY SALES UK LTD. Unit 22 Rassau Industrial Estate Ebbw Vale, Gwent **NP23 5SD** UK

#### Installation

Can be installed and operated in any orientation except permanently inverted

### Batteries must not be suspended by their handles (where fitted)

**Handles** 

**Vent valves** 

#### Each cell is fitted with a low pressure release valve to allow gasses to escape and then reseal.

**Gas Release** 

VRLA Batteries release hydrogen gas which can form explosive mixtures in air. Do not place inside a sealed container

#### Recycling

YUASA's VRLA batteries must be recycled at the end of life in accordance with local and national laws and