



SN54LS696, SN54LS697, SN54LS699, SN74LS696, SN74LS697, SN74LS699
SYNCHRONOUS UP/DOWN COUNTERS
WITH OUTPUT REGISTERS AND MULTIPLEXED 3-STATE OUTPUTS
SDLS199 D2424, JANUARY 1981—REVISED MARCH 1988

- 4-Bit Counters/Registers
- Multiplexed Outputs for Counter or Latched Data
- 3-State Outputs Drive Bus Lines Directly
- 'LS696 . . . Decade Counter, Direct Clear
- 'LS697 . . . Binary Counter, Direct Clear
- 'LS699 . . . Binary Counter, Synchronous Clear

SN54LS696, SN54LS697,
SN54LS699 . . . J OR W PACKAGE
SN74LS696, SN74LS697,
SN74LS699 . . . DW OR N PACKAGE
(TOP VIEW)

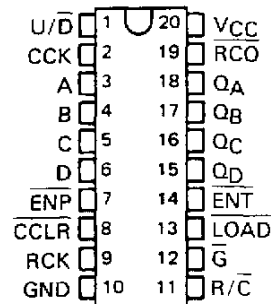

SN54LS696, SN54LS697,
SN54LS699 . . . FK PACKAGE
(TOP VIEW)

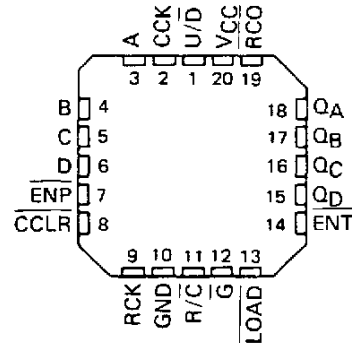


description

These low-power Schottky LSI devices incorporate synchronous up/down counters, four-bit D-type registers, and quadruple two-line to one-line multiplexers with three state outputs in a single 20-pin package. The up/down counters are programmable from the data inputs and feature enable \bar{P} and enable \bar{T} and a ripple-carry output for easy expansion. The register/counter select input R/\bar{C} , selects the counter when low and the register when high for the three-state outputs, Q_A , Q_B , Q_C , and Q_D . These outputs are rated at 12 and 24 milliamperes (54LS/74LS) for good bus driving performance.

Both the counter CCK and register clock RCK are positive-edge triggered. The counter clear \overline{CCLR} is active low and is asynchronous on the 'LS696 and 'LS697, synchronous on the 'LS699. Loading of the counter is accomplished when \overline{LOAD} is taken low and a positive transition occurs on the counter clock CCK.

Expansion is easily accomplished by connecting \overline{RCO} of the first stage to \overline{ENT} of the second stage, etc. All ENP inputs can be tied common and used as a master enable or disable control.

schematics of inputs and outputs



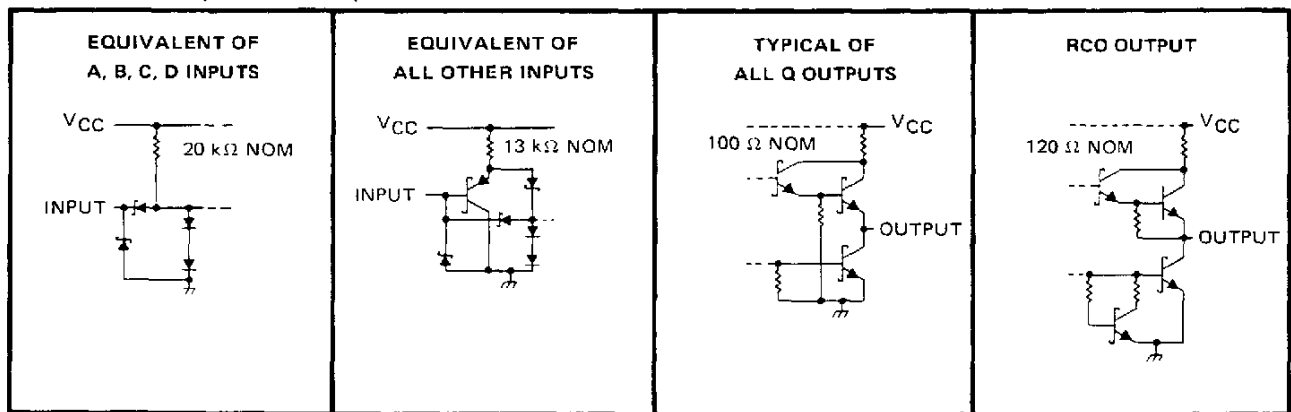


PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



SN54LS696, SN54LS697, SN54LS699, SN74LS696, SN74LS697, SN74LS699
SYNCHRONOUS UP/DOWN COUNTERS
WITH OUTPUT REGISTERS AND MULTIPLEXED 3-STATE OUTPUTS


logic symbols†

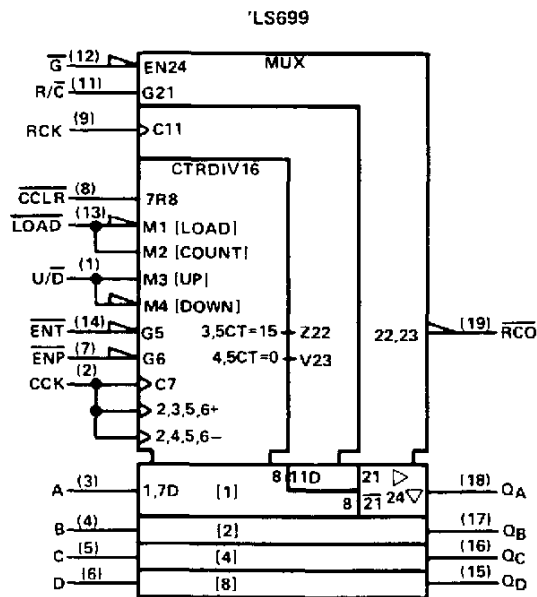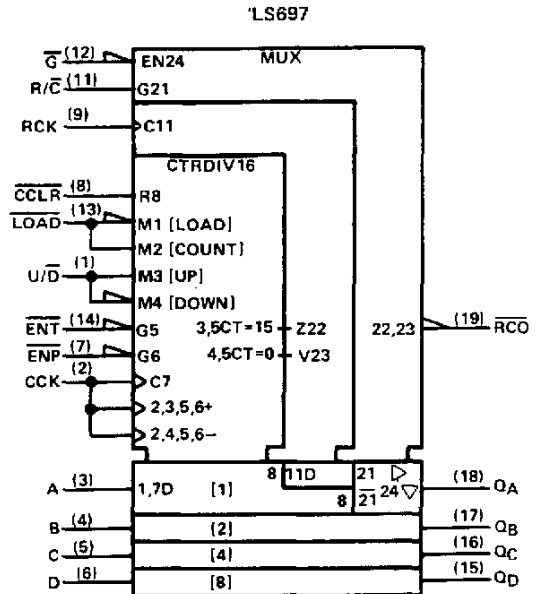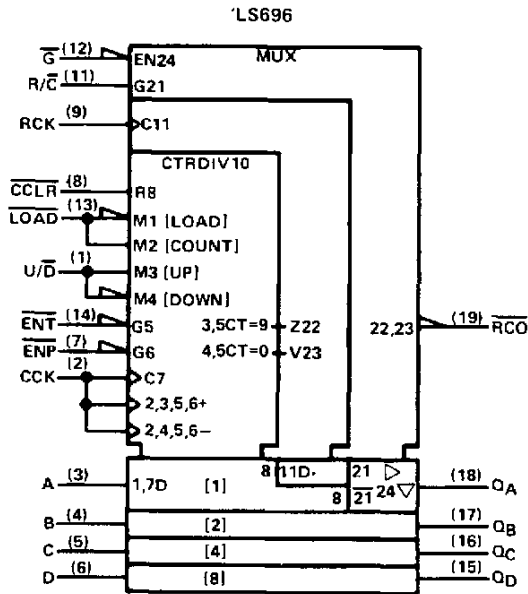

†These symbols are in accordance with ANSI/IEEE Std. 91-1984 and IEC Publication 617-12.

SN54LS696, SN74LS696
SYNCHRONOUS UP/DOWN COUNTERS
WITH OUTPUT REGISTERS AND MULTIPLEXED 3-STATE OUTPUTS

logic diagrams (positive logic)

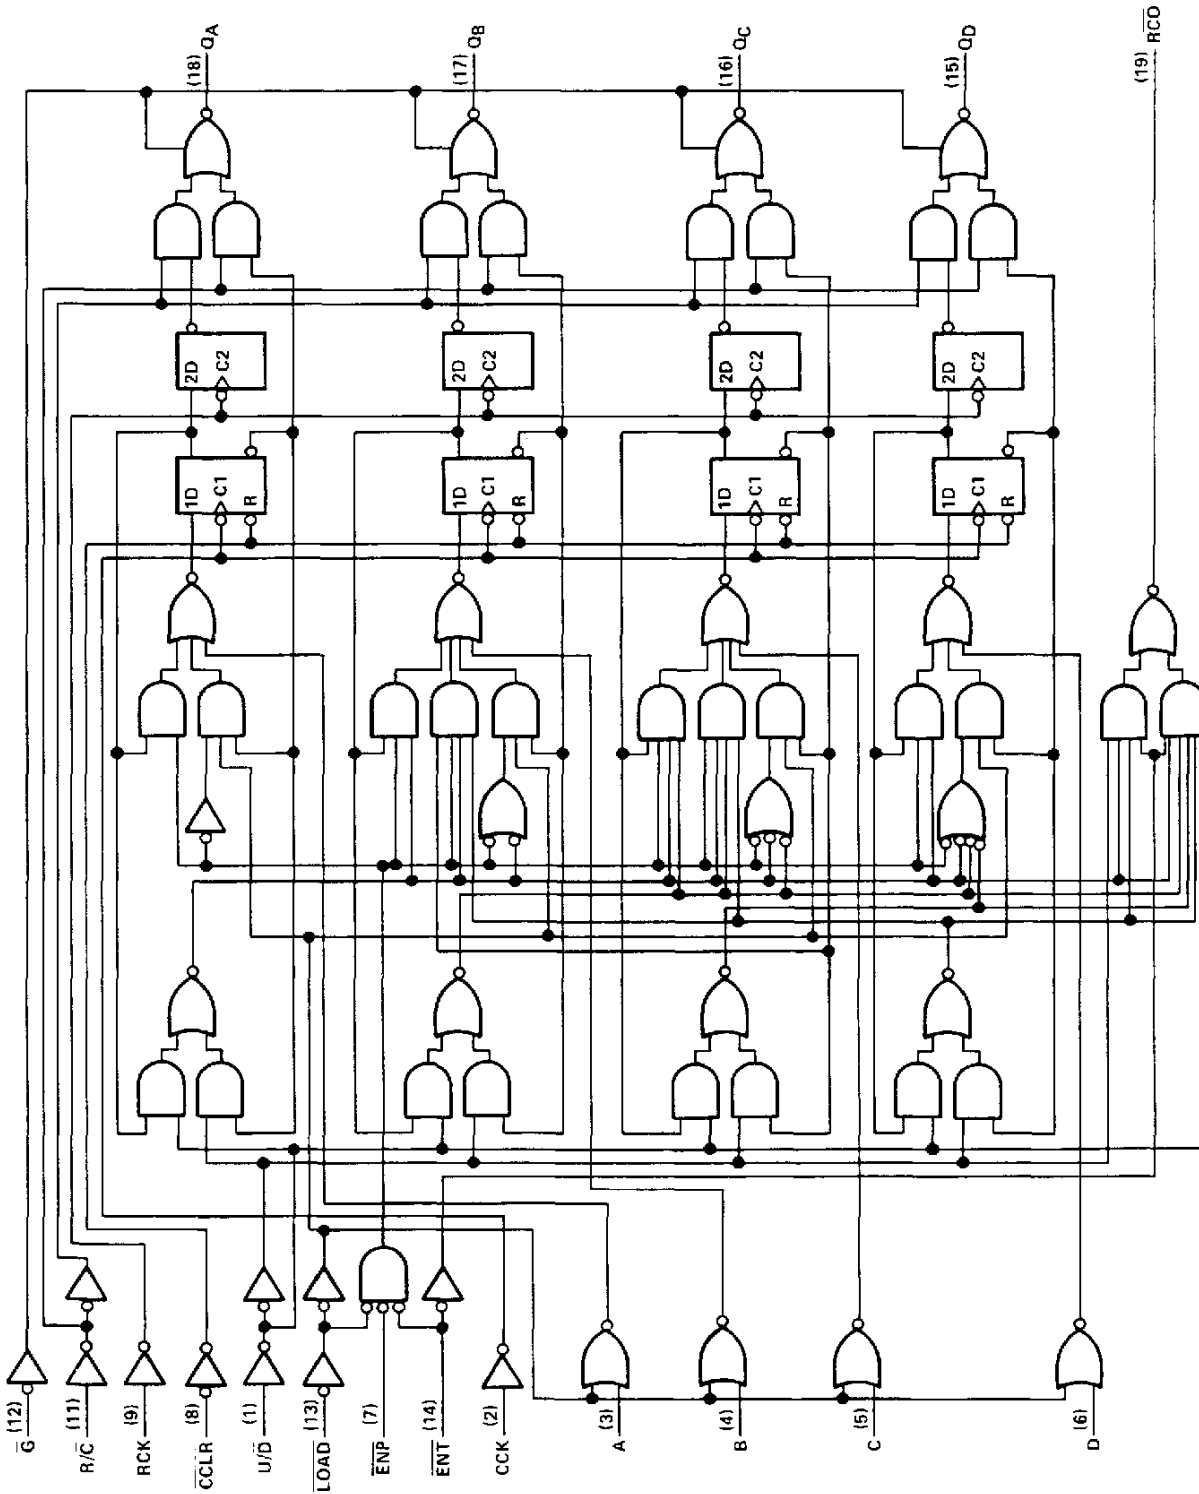


TEXAS 
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265


SN54LS697, SN74LS697
SYNCHRONOUS UP/DOWN COUNTERS
WITH OUTPUT REGISTERS AND MULTIPLEXED 3-STATE OUTPUTS

logic diagrams (positive logic) (continued)

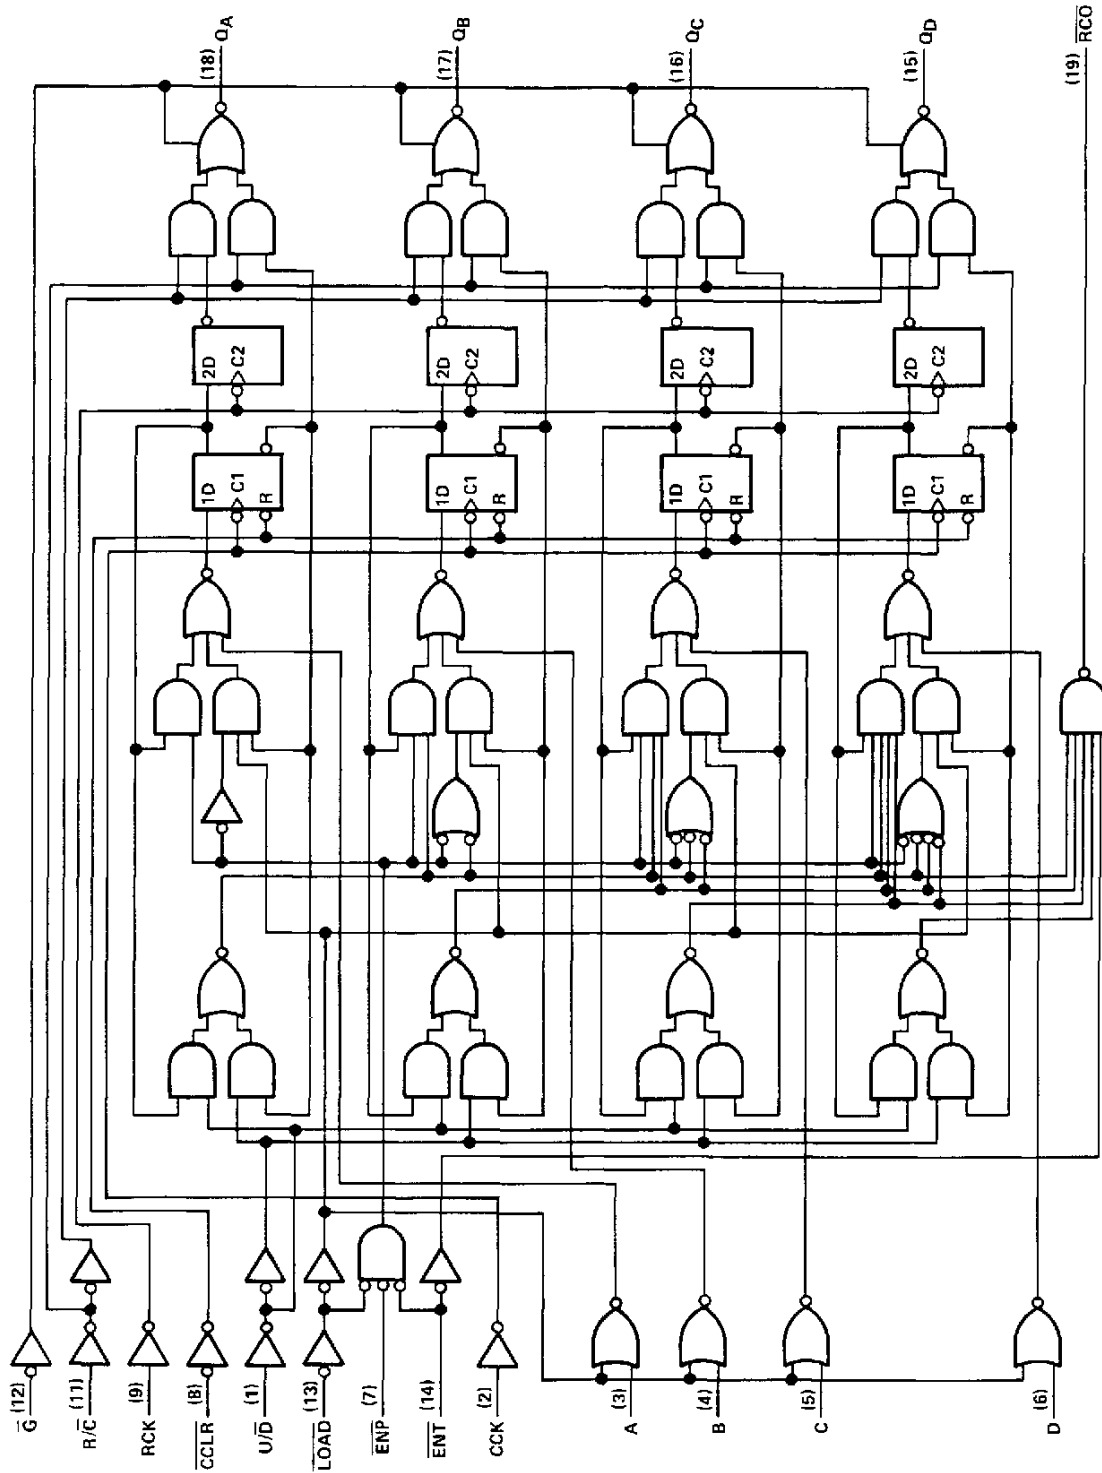


SN54LS698, SN74LS698
SYNCHRONOUS UP/DOWN COUNTERS
WITH OUTPUT REGISTERS AND MULTIPLEXED 3-STATE OUTPUTS

logic diagrams (positive logic) (continued)

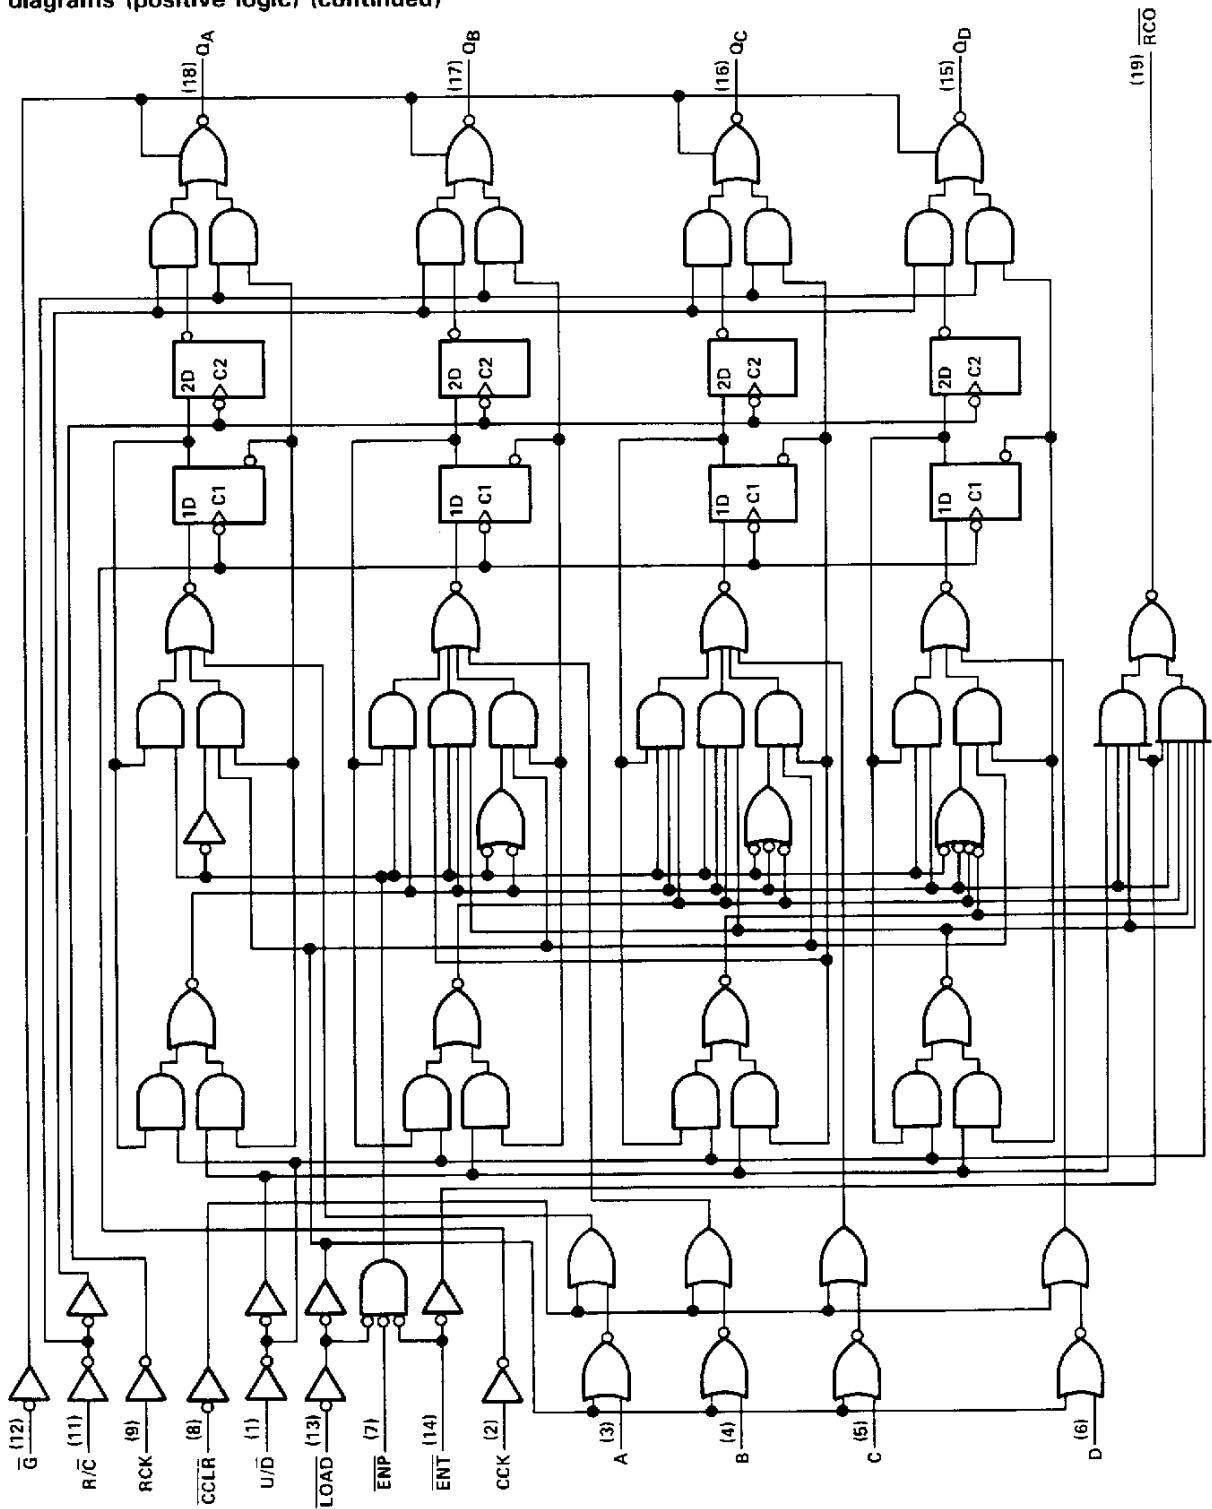

SN54LS699, SN74LS699
SYNCHRONOUS UP/DOWN COUNTERS
WITH OUTPUT REGISTERS AND MULTIPLEXED 3-STATE OUTPUTS

logic diagrams (positive logic) (continued)

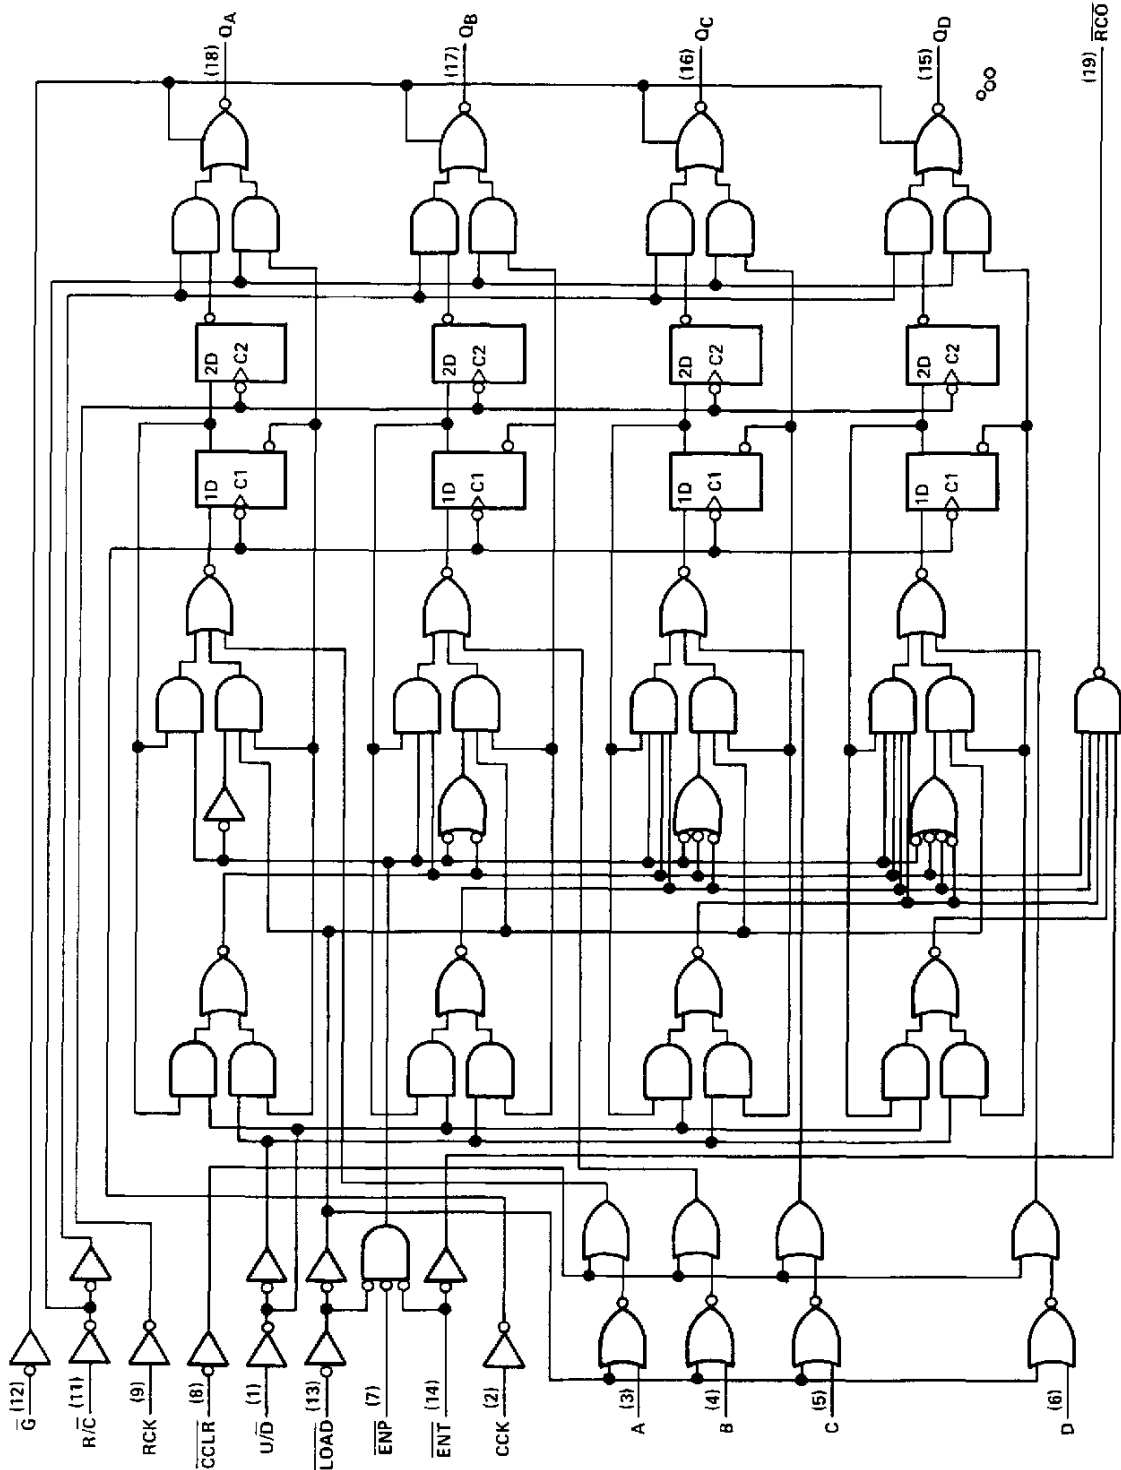

SN54LS696, SN54LS697, SN54LS699, SN74LS696, SN74LS697, SN74LS699
SYNCHRONOUS UP/DOWN COUNTERS
WITH OUTPUT REGISTERS AND MULTIPLEXED 3-STATE OUTPUTS

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

| | |
|---|----------------|
| Supply voltage, V_{CC} (see Note 1) | 7 V |
| Input voltage | 7 V |
| Off-state output voltage | 5.5 V |
| Operating free-air temperature range: SN54LS696, SN54LS697, SN54LS699 | -55°C to 125°C |
| SN74LS696, SN74LS697, SN74LS699 | 0°C to 70°C |
| Storage temperature range | -65°C to 150°C |

NOTE 1: Voltage values are with respect to network ground terminals.

recommended operating conditions

| | | SN54LS' | | | SN74LS' | | | UNIT |
|---------------------------|--|--|-----|------|---------|-----|------|------|
| | | MIN | NOM | MAX | MIN | NOM | MAX | |
| V_{CC} | Supply voltage | 4.5 | 5 | 5.5 | 4.75 | 5 | 5.25 | V |
| I_{OH} | High-level output current | Q | | -1 | | | -2.6 | mA |
| | | \overline{RCD} | | -0.4 | | | -0.4 | |
| I_{OL} | Low-level output current | Q | | 12 | | | 24 | mA |
| | | \overline{RCD} | | 4 | | | 8 | |
| f_{clock} | Clock frequency | CCK | 0 | 20 | 0 | | 20 | MHz |
| | | RCK | 0 | 20 | 0 | | 20 | |
| t_w | Pulse duration | CCK high or low | 25 | | 25 | | | ns |
| | | RCK high or low | 25 | | 25 | | | |
| | | 'LS696, 'LS697 \overline{CCLR} low | 20 | | 20 | | | |
| t_{su} | Setup time before CCK ↑ | A thru D | 30 | | 30 | | | ns |
| | | \overline{ENP} or \overline{ENT} | 30 | | 30 | | | |
| | | LOAD | 30 | | 30 | | | |
| | | U/\overline{D} | 35 | | 35 | | | |
| | | 'LS696, 'LS697, \overline{CCLR} inactive | 25 | | 25 | | | |
| 'LS699, \overline{CCLR} | 30 | | 30 | | | | | |
| t_{su} | Setup time CCK ↑ before RCK ↑ (see Note 2) | 30 | | 30 | | | ns | |
| t_h | Hold time | 0 | | 0 | | | ns | |
| T_A | Operating free-air temperature | -55 | | 125 | 0 | | 70 | °C |

NOTE 2: This set up time ensures the register will see stable data from the counter outputs. The clocks may be tied together in which case the register state will be one clock pulse behind the counter.



SN54LS696, SN54LS697, SN54LS699, SN74LS696, SN74LS697, SN74LS699
SYNCHRONOUS UP/DOWN COUNTERS
WITH OUTPUT REGISTERS AND MULTIPLEXED 3-STATE OUTPUTS

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER | TEST CONDITIONS† | SN54LS' | | | SN74LS' | | | UNIT | |
|---|--|---|-------------------------------|------|---------|------|------|---------|---|
| | | MIN | TYP‡ | MAX | MIN | TYP‡ | MAX | | |
| V _{IH} High-level input voltage | | 2 | | | 2 | | | V | |
| V _{IL} Low-level input voltage | | | | 0.7 | | | 0.8 | V | |
| V _{IK} Input clamp voltage | V _{CC} =MIN, I _I =-18 mA | | | -1.5 | | | -1.5 | V | |
| V _{OH} High-level output voltage | Any Q | V _{CC} =MIN, V _{IH} =2 V, V _{IL} =V _{IL} max | I _{OH} =-1 mA | 2.4 | 3.1 | | | V | |
| | Any Q | | I _{OH} =-2.6 mA | | | 2.4 | 3.1 | | |
| | \overline{RCO} | | I _{OH} =-400 μ A | 2.5 | 3.2 | 2.7 | 3.2 | | |
| V _{OL} Low-level output voltage | Any Q | V _{CC} =MIN, V _{IH} =2 V, V _{IL} =V _{IL} max | I _{OL} =12 mA | | 0.25 | 0.4 | 0.25 | 0.4 | V |
| | Any Q | | I _{OL} =24 mA | | | | 0.35 | 0.5 | |
| | \overline{RCO} | | I _{OL} =4 mA | | 0.25 | 0.4 | 0.25 | 0.4 | |
| | \overline{RCO} | | I _{OL} =8 mA | | | | 0.35 | 0.5 | |
| I _{OZH} Off-state output current, high-level voltage applied | Any Q | V _{CC} =MAX, \overline{G} at 2 V, V _O =2.7 V | | | 20 | | 20 | μ A | |
| I _{OZL} Off-state output current, low-level voltage applied | Any Q | V _{CC} =MAX, \overline{G} at 2 V, V _O =0.4 V | | | -20 | | -20 | μ A | |
| I _I Input current at maximum input voltage | | V _{CC} =MAX, V _I =7 V | | | 0.1 | | 0.1 | mA | |
| I _{IH} High-level input current | | V _{CC} =MAX, V _I =2.7 V | | | 20 | | 20 | μ A | |
| I _{IL} Low-level input current | A thru D | V _{CC} =MAX, V _I =0.4 V | | | -0.4 | | -0.4 | mA | |
| | All others | | | | -0.2 | | -0.2 | | |
| I _{OS} Short-circuit output current§ | Any Q | V _{CC} =MAX, V _O =0 V | | -30 | -130 | -30 | -130 | mA | |
| | \overline{RCO} | | | -20 | -100 | -20 | -100 | | |
| I _{CCH} Supply current, outputs high | | V _{CC} =MAX, All outputs open | See Note 3 | 46 | 65 | 46 | 65 | mA | |
| I _{CCL} Supply current, outputs low | | | See Note 4 | 48 | 70 | 48 | 70 | | |
| I _{CCZ} Supply current, outputs off | | | See Note 5 | 48 | 70 | 48 | 70 | | |

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at V_{CC} = 5 V, T_A = 25°C.

§ Only one output should be shorted at a time, and duration of the short-circuit should not exceed one second.

NOTES: 3. I_{CCH} is measured after two 4.5 V to 0 V to 4.5 V pulses have been applied to CCK and RCK while \overline{G} is grounded and all other inputs are at 4.5 V.

4. I_{CCL} is measured after two 0 V to 4.5 V to 0 V pulses have been applied to CCK and RCK while all other inputs are grounded.

5. I_{CCZ} is measured after two 0 V to 4.5 V to 0 V pulses have been applied to CCK and RCK while \overline{G} is at 4.5 V and all other inputs are grounded.

switching characteristics, V_{CC} = 5 V, T_A = 25°C (see note 6)

| PARAMETER | FROM (INPUT) | TO (OUTPUT) | TEST CONDITIONS | 'LS696, 'LS697 | | | 'LS699 | | | UNIT |
|------------------|-------------------|------------------|--|----------------|-----|-----|--------|-----|-----|------|
| | | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| t _{PLH} | CCK↑ | \overline{RCO} | R _L = 2 k Ω , C _L = 15 pF | 23 | 40 | | 23 | 40 | ns | |
| t _{PHL} | | | | 23 | 40 | | 23 | 40 | ns | |
| t _{PLH} | \overline{ENT} | \overline{RCO} | | 13 | 20 | | 13 | 20 | ns | |
| t _{PHL} | | | | 13 | 20 | | 13 | 20 | ns | |
| t _{PLH} | CCK↑ | Q | | 12 | 20 | | 12 | 20 | ns | |
| t _{PHL} | | | | 17 | 25 | | 17 | 25 | ns | |
| t _{PLH} | RCK↑ | Q | 12 | 20 | | 12 | 20 | ns | | |
| t _{PHL} | | | 17 | 25 | | 17 | 25 | ns | | |
| t _{PHL} | CCLR↓ | Q | 23 | 40 | | | | ns | | |
| t _{PLH} | R/ \overline{C} | Q | 16 | 25 | | 16 | 25 | ns | | |
| t _{PHL} | | | 16 | 25 | | 16 | 25 | ns | | |
| t _{PZH} | \overline{G} ↓ | Q | 19 | 30 | | 19 | 30 | ns | | |
| t _{PZL} | | | 19 | 30 | | 19 | 30 | ns | | |
| t _{PHZ} | \overline{G} ↑ | Q | 17 | 30 | | 17 | 30 | ns | | |
| t _{PLZ} | | | 17 | 30 | | 17 | 30 | ns | | |


NOTE 6: Load circuits and voltage waveforms are shown in Section 1.



SN54LS696, SN74LS696
SYNCHRONOUS UP/DOWN COUNTERS
WITH OUTPUT REGISTERS AND MULTIPLEXED 3-STATE OUTPUTS

typical operating sequences


'LS696 DECADE COUNTER, Asynchronous Clear

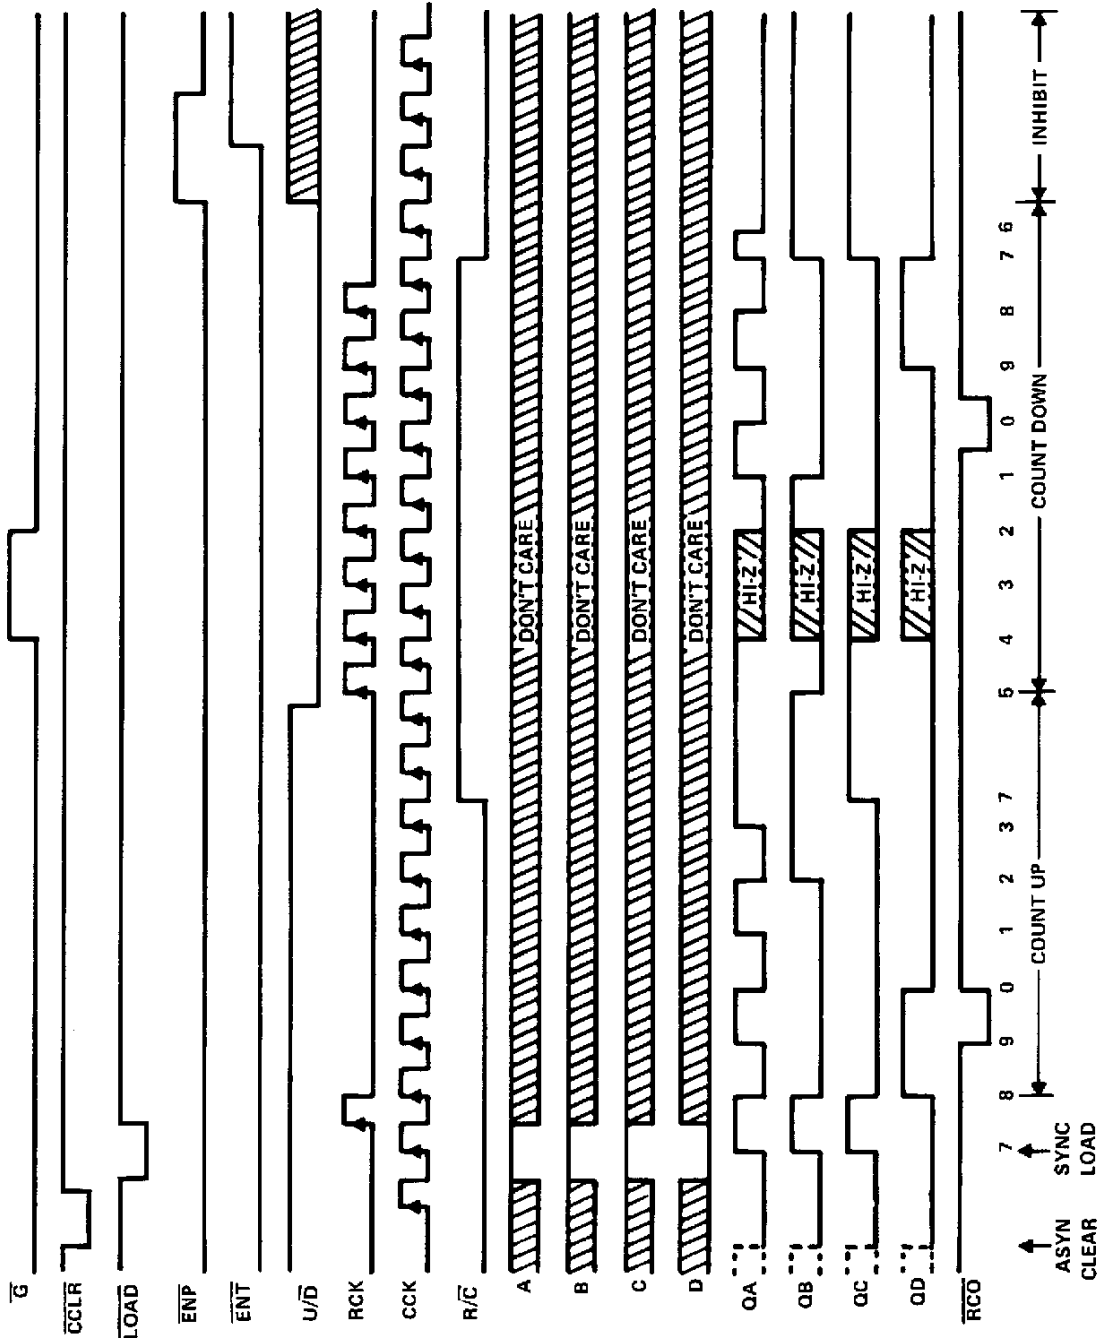

SN54LS697, SN54LS699, SN74LS697, SN74LS699
SYNCHRONOUS UP/DOWN COUNTERS
WITH OUTPUT REGISTERS AND MULTIPLEXED 3-STATE OUTPUTS

typical operating sequences (continued)

'LS697 BINARY COUNTER, Asynchronous Clear
 'LS699 BINARY COUNTER, Synchronous Clear

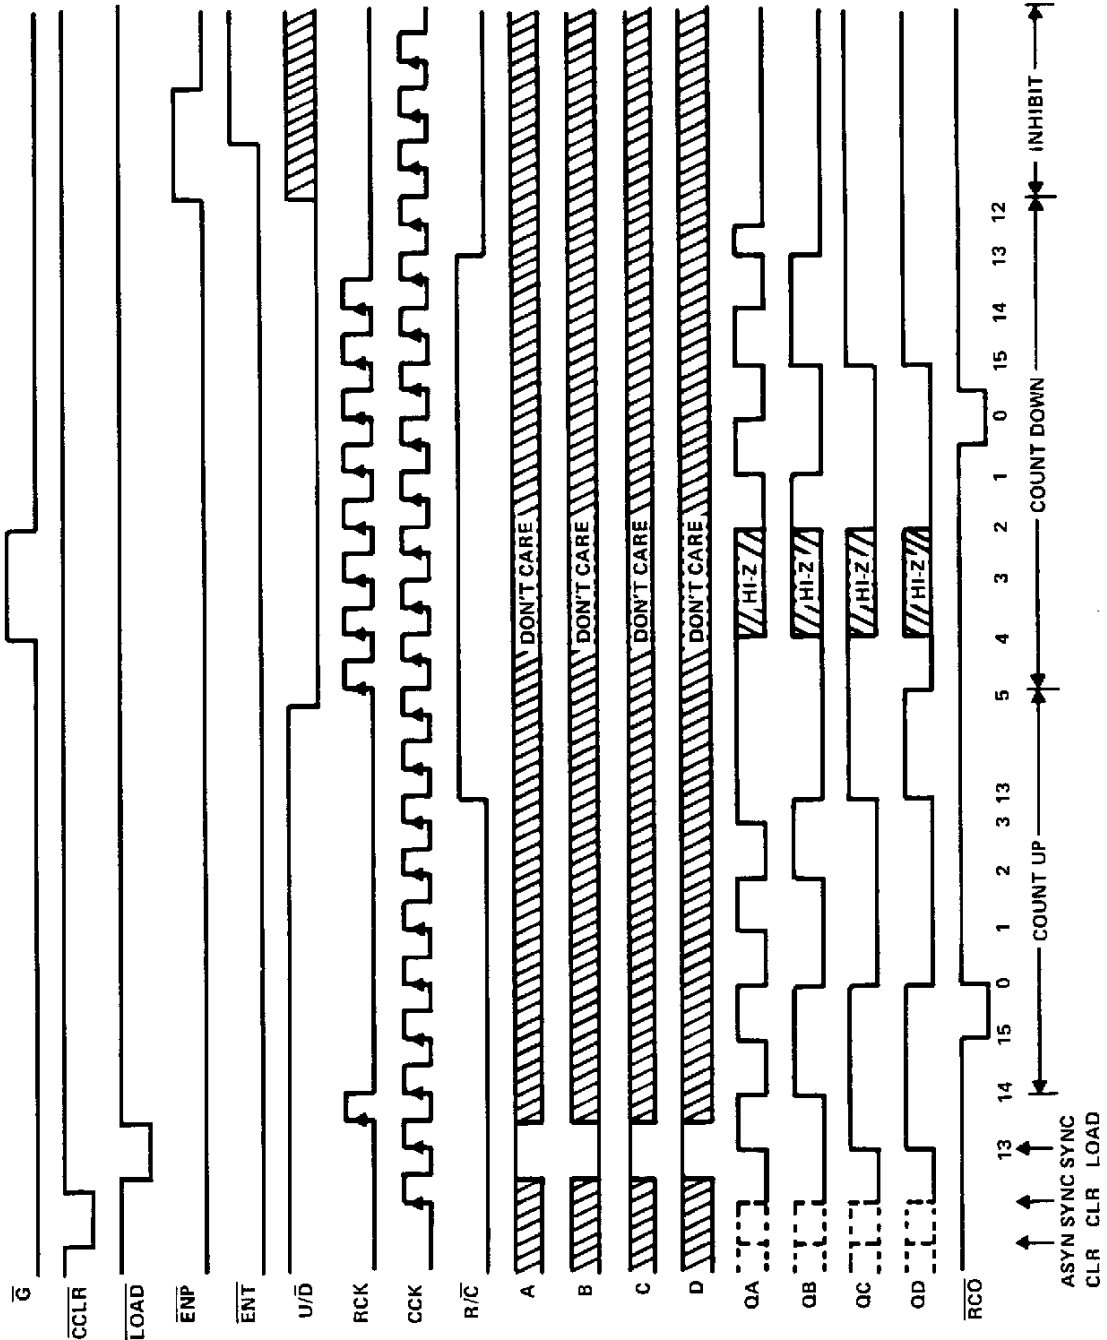

TAPE AND REEL INFORMATION



QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| SN74LS697NSR | SO | NS | 20 | 2000 | 330.0 | 24.4 | 8.2 | 13.0 | 2.5 | 12.0 | 24.0 | Q1 |

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| SN74LS697NSR | SO | NS | 20 | 2000 | 346.0 | 346.0 | 41.0 |

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

| | |
|-----------------------------|--|
| Amplifiers | amplifier.ti.com |
| Data Converters | dataconverter.ti.com |
| DLP® Products | www.dlp.com |
| DSP | dsp.ti.com |
| Clocks and Timers | www.ti.com/clocks |
| Interface | interface.ti.com |
| Logic | logic.ti.com |
| Power Mgmt | power.ti.com |
| Microcontrollers | microcontroller.ti.com |
| RFID | www.ti-rfid.com |
| RF/IF and ZigBee® Solutions | www.ti.com/lprf |

Applications

| | |
|--------------------|--|
| Audio | www.ti.com/audio |
| Automotive | www.ti.com/automotive |
| Broadband | www.ti.com/broadband |
| Digital Control | www.ti.com/digitalcontrol |
| Medical | www.ti.com/medical |
| Military | www.ti.com/military |
| Optical Networking | www.ti.com/opticalnetwork |
| Security | www.ti.com/security |
| Telephony | www.ti.com/telephony |
| Video & Imaging | www.ti.com/video |
| Wireless | www.ti.com/wireless |

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2009, Texas Instruments Incorporated