



BD181 – BD182 – BD183

**NPN SILICON TRANSISTOR
POWER LINERAR AND SWITCHING APPLICATIONS**

BD181, BD182 and BD183 are silicon NPN transistors intended for a wide variety of high power applications. Typical applications include power switching circuits, audio amplifiers, solenoid drivers, and series and shunt regulators.

ABSOLUTE MAXIMUM RATINGS

Symbol	Ratings		Value	Unit	
V_{CBO}	Collector-Base Voltage	BD181	55	V	
		BD182	70		
		BD183	85		
V_{CEO}	Collector-EmitterVoltage	BD181	45	V	
		BD182	60		
		BD183	80		
V_{CER}	Collector-EmitterVoltage	$R_{BE}=100 \Omega$	BD181 55	V	
			BD182 70		
			BD183 85		
V_{CEX}	Collector-EmitterVoltage	$V_{BE}=-1.5 V$	BD181 55	V	
			BD182 70		
			BD183 85		
V_{EBO}	Emitter-Base Voltage	BD181	7.0	V	
		BD182			
		BD183			
I_C	Collector Current	BD181	15	A	
		BD182			
		BD183			
I_B	Base Current	BD181	7.0	A	
		BD182			
		BD183			
P_T	Power Dissipation	@ $T_C < 25^\circ$	2N6050	150	Watts
			2N6057		
			2N6051		
			2N6058		
			2N6052		
			2N6059		

BD181 – BD182 – BD183

Symbol	Ratings	Value	Unit
P_{TOT}	Power dissipation	BD181 BD182 BD183 117	W
$T_J T_s$	Junction Storage Temperature	BD181 BD182 BD183 200 -65 to +200	°C

THERMAL CHARACTERISTICS

Symbol	Ratings	Value	Unit
R_{thJ-C}	Thermal Resistance, Junction to Case	1.5	°C/W

ELECTRICAL CHARACTERISTICS

TC=25°C unless otherwise noted

Symbol	Ratings	Test Condition(s)	Min	Typ	Mx	Unit	
I_{EBO}	Emitter-Base Cutoff Current	$V_{EB}=7\text{ V}, I_C=0$	BD181	-	-	5.0	A
			BD182	-	-		
			BD183	-	-		
I_{CBO}	Collector-Base Cutoff Current	$V_{CB}=45\text{ V}$ $t_i=200^\circ\text{C}$	BD181	-	-	2.0	mA
		$V_{CB}=60\text{ V}$ $t_i=200^\circ\text{C}$	BD182	-	-	5.0	
		$V_{CB}=80\text{ V}$ $t_i=200^\circ\text{C}$	BD182	-	-	5.0	
$V_{CEO(BR)}$	Collector-Emitter Breakdown Voltage (*)	$I_C=200\text{ mA}, I_B=0$	BD181	45	-	-	V
			BD182	60	-	-	
			BD183	80	-	-	
$V_{CE(SAT)}$	Collector-Emitter saturation Voltage (*)	$I_C=3\text{ A}, I_B=0.3\text{ A}$	BD181	-	-	1.0	V
		$I_C=4\text{ A}, I_B=0.4\text{ A}$	BD182	-	-	1.0	
		$I_C=3\text{ A}, I_B=0.3\text{ A}$	BD183	-	-	1.0	
$V_{BR(CER)}$	Collector-Emitter Breakdown Voltage (*)	$I_C=200\text{ mA}, R_{BE}=100\ \Omega$	BD181	55	-	-	V
			BD182	70	-	-	
			BD183	85	-	-	

BD181 – BD182 – BD183


Symbol	Ratings	Test Condition(s)	Min	Typ	Mx	Unit	
$f_{h_{21e}}$	Collector-Emitter Breakdown Voltage (*)	$I_C=200\text{ mA}, R_{BE}=100\ \Omega$	BD181 BD182 BD183	15	-	-	kHz
h_{21E}	Static forward current transfer ratio (*)	$V_{CE}=4.0\text{ V}, I_C=3.0\text{ A}$	BD181	20	-	70	-
		$V_{CE}=4.0\text{ V}, I_C=4.0\text{ A}$	BD182	20	-	70	
		$V_{CE}=4.0\text{ V}, I_C=3.0\text{ A}$	BD183	20	-	70	

For PNP types current and voltage values are negative

(*) Pulse Width $\approx 300\ \mu\text{s}$, Duty Cycle $\angle 2.0\%$

MECHANICAL DATA CASE TO-3

DIMENSIONS		
	mm	inches
A	25,51	1,004
B	38,93	1,53
C	30,12	1,18
D	17,25	0,68
E	10,89	0,43
G	11,62	0,46
H	8,54	0,34
L	1,55	0,6
M	19,47	0,77
N	1	0,04
P	4,06	0,16

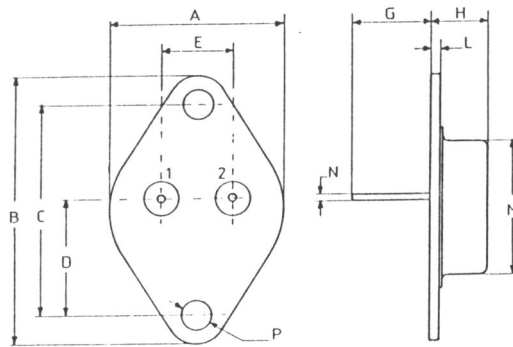

Pin 1 :	Base
Pin 2 :	Collector
Case :	Emitter