




1. DELL PLUG, BLACK COLOR.  
Dell plug, inner model used 30P PVC.  
outer model used 20P black color PVC.




2. DETACHABLE PLUG, BLACK COLOR.  
4PIN(CYOSS TYPE HOLE)  
Pin 1——1 AND 2 SHORT  
Pin 2——3 AND 4 SHORT




3. DETACHABLE PLUG. BLACK PLASTIC RING HARDWARE.  
Ø0.60X7.40X12.5±0.5mm "I" type.  
Used 20p black color pvc.  
10k 1/8W resistance+4.7k 1/8W resistance.




4. DETACHABLE PLUG. YELLOW PLASTIC RING HARDWARE.  
Ø0.90X7.90 X 11.5±0.5mm "I" type.  
Used 20p black color pvc.




5. DETACHABLE PLUG. BLACK PLASTIC RING HARDWARE.  
Ø0.60X7.40X12.5±0.5mm "I" type.  
Used 20p black color pvc.




6. DETACHABLE PLUG. BLACK PLASTIC RING HARDWARE.  
Ø1.90x5.50x12.5±0.5mm "I" type.  
Used 20P black color PVC.

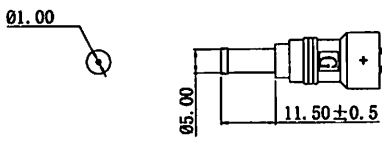


7. DETACHABLE PLUG. YELLOW PLASTIC RING HARDWARE.  
Ø1.00x5.00x11.5±0.5mm "I" type.  
Used 20P black color PVC.

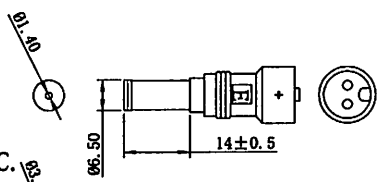


8. DETACHABLE PLUG. BLACK PLASTIC RING HARDWARE.  
Ø1.40x6.50x14±0.5mm "I" type.  
Used 20P black color PVC.

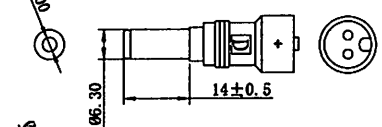


9. DETACHABLE PLUG. BLACK PLASTIC RING HARDWARE.  
Ø3.00x6.30x14±0.5mm "I" type.  
Used 20P black color PVC.

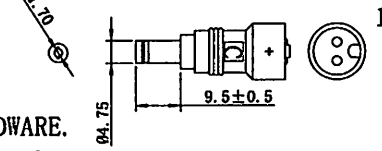


10. DETACHABLE PLUG. YELLOW PLASTIC RING HARDWARE.  
Ø1.70x4.75x9.5±0.5mm "I" type.  
Used 20P black color PVC.

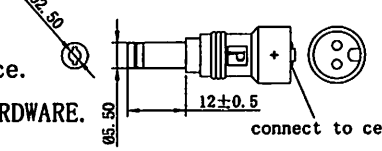

11. DETACHABLE PLUG. BLACK PLASTIC RING HARDWARE.  
Ø2.50x5.50x12±0.5mm "I" fork type.  
Used 20P black color PVC.




12. DETACHABLE PLUG. ORANGE PLASTIC RING HARDWARE.  
Ø2.10x5.50x12±0.5mm "L" type.  
Used 20P black color PVC.



FUNCTION TEST: No open, no reversed polarity, no short-circuit, no INT.  
(功能测试: 无开路, 无极反, 无短路, 无INT)

FINISHED PRODUCT ASSEMBLY SHALL BE IN COMPLIANCE WITH RoHS REQUIREMENT.  
成品要求符合 RoHS 环保要求.



TOLERANCE	DESIGN/DATE	兰宗洲05/05/2009	DP PLUG			
X=±0.5mm	DRAWING/DATE	兰宗洲05/05/2009	DESIGN	SIGN	REV	SEC
.X=±0.3mm	ASSESSOR		00		R0	
.XX=±0.05mm	DATE		VANSON ELECTRONICS LIMITED			
	RATIFIER					
	DATE					