

# T 205



Euromas  
 Euromas enclosure, ABS

**Order no.: 03205000**

**Colour of enclosure group**

Light grey, similar to RAL 7035; special colours on request

**Protection class**

Depending on the model: IP 65 or IP 66/DIN EN 60529

**Enclosure material**


Enclosure material: ABS, PC (UV stabilised) and selected sizes in PC UL 94 V0 (additional UL 94 V0 versions on request), seal made of CR; for details, see Technical Information

Scope of delivery: Lid and base, lid screws made of V2A, self-tapping screws for mounting bosses

Note: \* = Available on request. Accessories: see following pages.

SV = version with quick-release fastener

c3 = Ingress protection acc. to DIN EN 60529

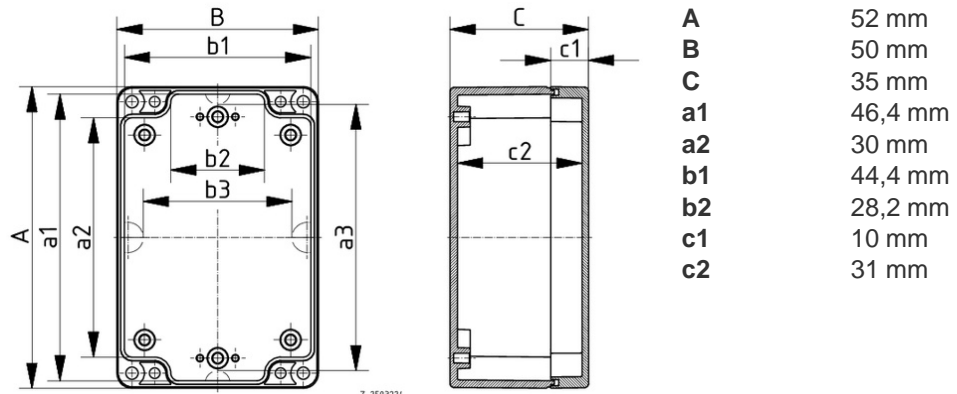

**Technical drawings**

Catalogue drawing in DXF format:

[03205000\\_T-205.dxf](#) (592 KB)

Catalogue drawing in PDF format:

[03205000\\_T-205.pdf](#) (62 KB)

3D product data in STEP format:

[Registration necessary](#)

Basic drawing for processing work:

[03205000\\_T-205-G.dxf](#) (309 KB)

**Chapter download**

[Euromas-ABS\\_Polycarbonate\\_GB.pdf](#) (531 KB)

## Accessories



**Mounting plates, laminated paper (Pertinax), galvanised steel for version 260**

22000100 [M](#)

For EM/ET 205, M/T 205



**DIN rails DIN EN 60715 TH 15**

22001800 [TS 15](#)

For M/T 205



**Threaded inserts for mounting bosses**

59002820 [DODGE M4x9,5](#)

ND = 5.4 x 9.5

59002810 [DODGE M3x6,5](#)

ND = 4.0 x 6.5