


# KBPC 5000F ... KBPC 5012F

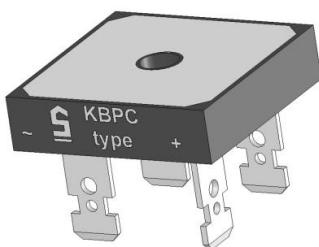

Square bridge

| Type        | Alternating input voltage<br>V <sub>RMS</sub><br>V | Repetitive peak reverse voltage<br>V <sub>RRM</sub><br>V |
|-------------|--|--|
| KBPC 5000 F | 35   | 50   |
| KBPC 5001 F | 70   | 100  |
| KBPC 5002 F | 140  | 200  |
| KBPC 5004 F | 280  | 400  |
| KBPC 5006 F | 420  | 600  |
| KBPC 5008 F | 560  | 800  |
| KBPC 5010 F | 700  | 1000   |
| KBPC 5012 F | 800  | 1200   |

## Silicon-Bridge Rectifiers

### KBPC 5000F ... KBPC 5012F

**Forward Current: 50 A**

**Reverse Voltage: 50 to 1200 V**

Publish Data

### Features

- max. solder temperature 260°C, max. 5s
- UL recognized, file no. E63532
- Standard packaging: bulk
- V<sub>ISO</sub> > 2500 V

### Mechanical Data

- Plastic case with alu-bottom 28,6 \* 28,6 \* 7,3 [mm]
- Weight approx. 18 g
- Terminals: plated terminals solderable per IEC 68-2-20
- Mounting position: any
- Admissible torque for mounting (M 5): 2 ( $\pm 10\%$ ) N
- F - faston only


T<sub>c</sub> = 25 °C unless otherwise specified

| Symbol           | Conditions  | Values         | Units            |
|------------------|---|----------------|------------------|
| I <sub>FRM</sub> | Repetitive peak forward current; f > 15 Hz <sup>1)</sup>                        | 90             | A                |
| I <sup>2</sup> t | Rating for fusing, t < 10 ms  | 800            | A <sup>2</sup> s |
| I <sub>FSM</sub> | Peak forward surge current, 50 Hz half sine-wave<br>T <sub>A</sub> = 25 °C      | 450            | A                |
| I <sub>FAV</sub> | Max. averaged fwd. current,<br>R-load, T <sub>A</sub> = 50 °C <sup>1)</sup>     | not applicable | A                |
| I <sub>FAV</sub> | Max. averaged fwd. current,<br>C-load, T <sub>A</sub> = 50 °C <sup>1)</sup>     | not applicable | A                |
| I <sub>FAV</sub> | Max. current with cooling fin,<br>R-load, T <sub>C</sub> = 100 °C <sup>2)</sup> | 50             | A                |
| I <sub>FAV</sub> | Max. current with cooling fin,<br>C-load, T <sub>C</sub> = 100 °C <sup>2)</sup> | 46             | A                |
| R <sub>thA</sub> | Thermal resistance junction to ambient <sup>1)</sup>                            |                | K/W              |
| R <sub>thC</sub> | Thermal resistance junction to case <sup>1)</sup>                               | 1,2            | K/W              |
| T <sub>j</sub>   | Operating junction temperature  | - 50 ... + 150 | °C               |
| T <sub>s</sub>   | Storage temperature   | - 50 ... + 150 | °C               |

T<sub>c</sub> = 25 °C unless otherwise specified

| Symbol         | Conditions  | Values | Units |
|----------------|---|--------|-------|
| V <sub>F</sub> | Maximum forward. voltage,<br>T <sub>j</sub> = 25 °C; I <sub>F</sub> = 25 A            | 1,1    | V     |
| I <sub>R</sub> | Maximum Leakage current,<br>T <sub>j</sub> = 25 °C; V <sub>R</sub> = V <sub>RRM</sub> | 25     | µA    |
| C <sub>J</sub> | Typical junction capacitance<br>per leg at V, MHz                                     |        | pF    |

Dimensions in mm

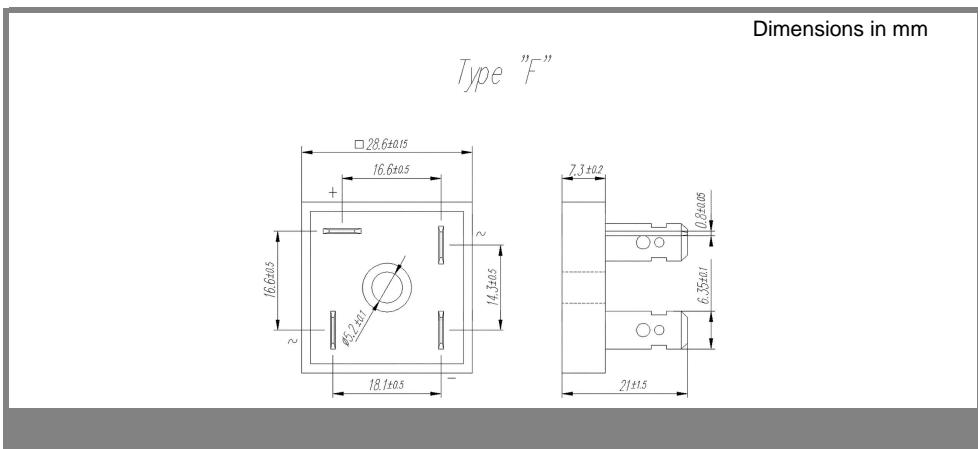

# KBPC 5000F ... KBPC 5012F

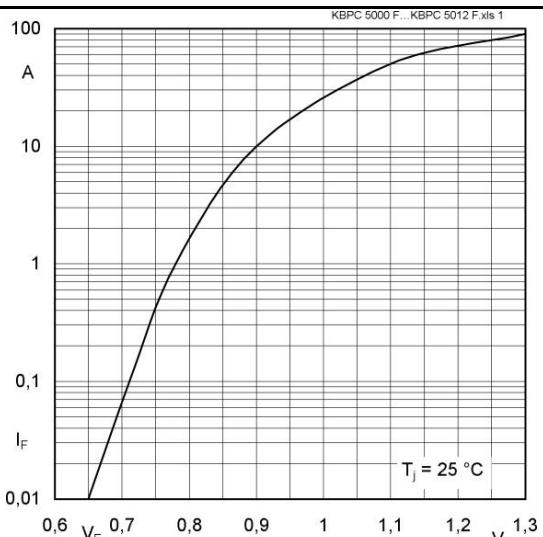


Fig. 1 : Forward characteristics (typical values)

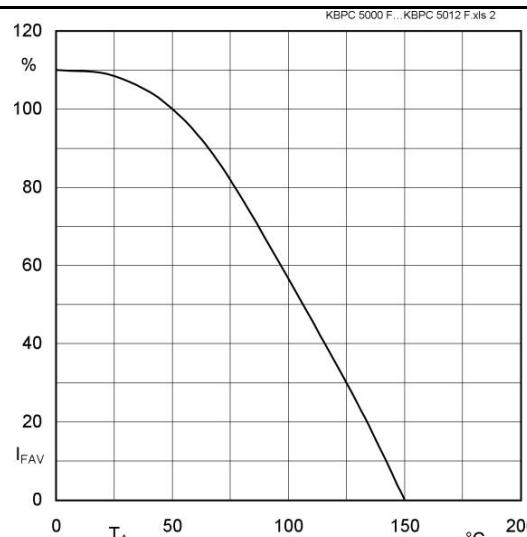


Fig. 2 : Rated forward current vs. ambient temperature