

TOSHIBA Bipolar Linear Integrated Circuit Silicon Monolithic

## TA7805S,TA78057S,TA7806S,TA7807S,TA7808S,TA7809S, TA7810S,TA7812S,TA7815S,TA7818S,TA7820S,TA7824S



Three Terminal Positive Voltage Regulators

5 V, 5.7 V, 6 V, 7 V, 8 V, 9 V, 10 V, 12 V, 15 V, 18 V, 20 V, 24 V

### Features


- Suitable for CMOS, TTL, the other digital IC's power supply.
- Internal thermal overload protection.
- Internal short circuit current limiting.
- Maximum output current of 1 A.
- Metal fin (tab) is fully covered with mold resin.  
(T0-220 NIS package)

### Pin Assignment

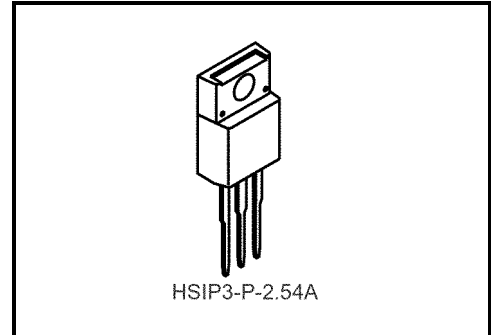

Weight: 1.7 g (typ.)

## Equivalent Circuit

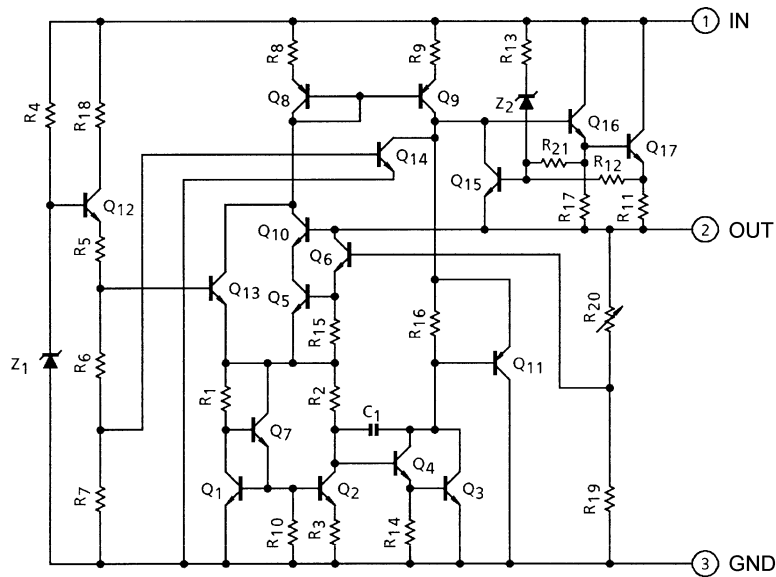

## Maximum Ratings (Ta = 25°C)

| Characteristics       | Symbol               | Rating      | Unit |    |
|-----------------------|----------------------|-------------|------|----|
| Input voltage         | V <sub>IN</sub>      | TA7805S     | V    |    |
|                       |                      | TA78057S    |      |    |
|                       |                      | TA7806S     |      |    |
|                       |                      | TA7807S     |      |    |
|                       |                      | TA7808S     |      | 35 |
|                       |                      | TA7809S     |      |    |
|                       |                      | TA7810S     |      |    |
|                       |                      | TA7812S     |      |    |
|                       |                      | TA7815S     |      |    |
|                       |                      | TA7818S     |      | 40 |
|                       |                      | TA7820S     |      |    |
|                       |                      | TA7824S     |      |    |
| Power dissipation     | P <sub>D</sub>       | (Ta = 25°C) | 2    | W  |
|                       |                      | (Tc = 25°C) | 20   |    |
| Operating temperature | T <sub>opr</sub>     | -30~85      | °C   |    |
| Storage temperature   | T <sub>stg</sub>     | -55~150     | °C   |    |
| Junction temperature  | T <sub>j</sub>       | 150         | °C   |    |
| Thermal resistance    | R <sub>th(j-c)</sub> | 6.25        | °C/W |    |
|                       | R <sub>th(j-a)</sub> | 62.5        |      |    |

## TA7805S

### Electrical Characteristics

(Unless otherwise specified,  $V_{IN} = 10\text{ V}$ ,  $I_{OUT} = 500\text{ mA}$ ,  $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ )

| Characteristics                                   | Symbol       | Test Circuit | Test Condition  | Min   | Typ. | Max  | Unit                       |    |
|---|--------------|--------------|---|---|------|------|----------------------------|----|
| Output voltage                                    | $V_{OUT}$    | 1            | $T_j = 25^\circ\text{C}$ , $I_{OUT} = 100\text{ mA}$  | 4.8   | 5.0  | 5.2  | V                          |    |
| Line regulation                                   | Reg-line     | 1            | $T_j = 25^\circ\text{C}$  | $7.0\text{ V} \leq V_{IN} \leq 25\text{ V}$     | —    | 3    | 100                        | mV |
|   |              |              |   | $8.0\text{ V} \leq V_{IN} \leq 12\text{ V}$     | —    | 1    | 50                         |    |
| Load regulation                                   | Reg-load     | 1            | $T_j = 25^\circ\text{C}$  | $5\text{ mA} \leq I_{OUT} \leq 1.4\text{ A}$    | —    | 15   | 100                        | mV |
|   |              |              |   | $250\text{ mA} \leq I_{OUT} \leq 750\text{ mA}$ | —    | 5    | 50                         |    |
| Output voltage                                    | $V_{OUT}$    | 1            | $T_j = 25^\circ\text{C}$<br>$7.0\text{ V} \leq V_{IN} \leq 20\text{ V}$<br>$5.0\text{ mA} \leq I_{OUT} \leq 1.0\text{ A}$ | 4.75  | —    | 5.25 | V                          |    |
| Quiescent current                                 | $I_B$        | 1            | $T_j = 25^\circ\text{C}$ , $I_{OUT} = 5\text{ mA}$  | —   | 4.2  | 8.0  | mA                         |    |
| Quiescent current change                          | $\Delta I_B$ | 1            | $7.0\text{ V} \leq V_{IN} \leq 25\text{ V}$ ,<br>$I_{OUT} = 5\text{ mA}$ , $T_j = 25^\circ\text{C}$                       | —   | —    | 1.3  | mA                         |    |
| Output noise voltage                              | $V_{NO}$     | 2            | $T_a = 25^\circ\text{C}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$<br>$I_{OUT} = 50\text{ mA}$                          | —   | 50   | —    | $\mu\text{V}_{rms}$        |    |
| Ripple rejection                                  | R.R.         | 3            | $f = 120\text{ Hz}$ , $8.0\text{ V} \leq V_{IN} \leq 18\text{ V}$<br>$I_{OUT} = 50\text{ mA}$ , $T_j = 25^\circ\text{C}$  | 62  | 78   | —    | dB                         |    |
| Dropout voltage                                   | $V_D$        | 1            | $I_{OUT} = 1.0\text{ A}$ , $T_j = 25^\circ\text{C}$   | —   | 2.0  | —    | V                          |    |
| Short circuit current limit                       | $I_{SC}$     | 1            | $T_j = 25^\circ\text{C}$  | —   | 1.6  | —    | A                          |    |
| Average temperature coefficient of output voltage | $T_{CVO}$    | 1            | $I_{OUT} = 5\text{ mA}$   | —   | -0.6 | —    | $\text{mV}/^\circ\text{C}$ |    |

## TA78057S

### Electrical Characteristics

(Unless otherwise specified,  $V_{IN} = 10.7\text{ V}$ ,  $I_{OUT} = 500\text{ mA}$ ,  $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ )

| Characteristics                                   | Symbol       | Test Circuit | Test Condition   | Min   | Typ. | Max  | Unit                       |    |
|---|--------------|--------------|--|---|------|------|----------------------------|----|
| Output voltage                                    | $V_{OUT}$    | 1            | $T_j = 25^\circ\text{C}$ , $I_{OUT} = 100\text{ mA}$   | 5.47  | 5.7  | 5.93 | V                          |    |
| Line regulation                                   | Reg-line     | 1            | $T_j = 25^\circ\text{C}$   | $7.7\text{ V} \leq V_{IN} \leq 25\text{ V}$     | —    | 4    | 110                        | mV |
|   |              |              |  | $8.7\text{ V} \leq V_{IN} \leq 12.7\text{ V}$   | —    | 2    | 55                         |    |
| Load regulation                                   | Reg-load     | 1            | $T_j = 25^\circ\text{C}$   | $5\text{ mA} \leq I_{OUT} \leq 1.4\text{ A}$    | —    | 15   | 110                        | mV |
|   |              |              |  | $250\text{ mA} \leq I_{OUT} \leq 750\text{ mA}$ | —    | 5    | 55                         |    |
| Output voltage                                    | $V_{OUT}$    | 1            | $T_j = 25^\circ\text{C}$<br>$7.7\text{ V} \leq V_{IN} \leq 20.7\text{ V}$<br>$5.0\text{ mA} \leq I_{OUT} \leq 1.0\text{ A}$  | 5.42  | —    | 5.98 | V                          |    |
| Quiescent current                                 | $I_B$        | 1            | $T_j = 25^\circ\text{C}$ , $I_{OUT} = 5\text{ mA}$   | —   | 4.3  | 8.0  | mA                         |    |
| Quiescent current change                          | $\Delta I_B$ | 1            | $7.7\text{ V} \leq V_{IN} \leq 25\text{ V}$ ,<br>$I_{OUT} = 5\text{ mA}$ , $T_j = 25^\circ\text{C}$                          | —   | —    | 1.3  | mA                         |    |
| Output noise voltage                              | $V_{NO}$     | 2            | $T_a = 25^\circ\text{C}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$<br>$I_{OUT} = 50\text{ mA}$                             | —   | 55   | —    | $\mu\text{V}_{rms}$        |    |
| Ripple rejection                                  | R.R.         | 3            | $f = 120\text{ Hz}$ , $8.8\text{ V} \leq V_{IN} \leq 18.8\text{ V}$ ,<br>$I_{OUT} = 50\text{ mA}$ , $T_j = 25^\circ\text{C}$ | 62  | 77   | —    | dB                         |    |
| Dropout voltage                                   | $V_D$        | 1            | $I_{OUT} = 1.0\text{ A}$ , $T_j = 25^\circ\text{C}$  | —   | 2.0  | —    | V                          |    |
| Short circuit current limit                       | $I_{SC}$     | 1            | $T_j = 25^\circ\text{C}$   | —   | 1.5  | —    | A                          |    |
| Average temperature coefficient of output voltage | $T_{CVO}$    | 1            | $I_{OUT} = 5\text{ mA}$  | —   | -0.7 | —    | $\text{mV}/^\circ\text{C}$ |    |

## TA7806S

### Electrical Characteristics

(Unless otherwise specified,  $V_{IN} = 11\text{ V}$ ,  $I_{OUT} = 500\text{ mA}$ ,  $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ )

| Characteristics                                   | Symbol       | Test Circuit | Test Condition  | Min   | Typ. | Max  | Unit                       |    |
|---|--------------|--------------|---|---|------|------|----------------------------|----|
| Output voltage                                    | $V_{OUT}$    | 1            | $T_j = 25^\circ\text{C}$ , $I_{OUT} = 100\text{ mA}$  | 5.75  | 6.0  | 6.25 | V                          |    |
| Line regulation                                   | Reg-line     | 1            | $T_j = 25^\circ\text{C}$  | $8.0\text{ V} \leq V_{IN} \leq 25\text{ V}$     | —    | 4    | 120                        | mV |
|   |              |              |   | $9\text{ V} \leq V_{IN} \leq 13\text{ V}$       | —    | 2    | 60                         |    |
| Load regulation                                   | Reg-load     | 1            | $T_j = 25^\circ\text{C}$  | $5\text{ mA} \leq I_{OUT} \leq 1.4\text{ A}$    | —    | 15   | 120                        | mV |
|   |              |              |   | $250\text{ mA} \leq I_{OUT} \leq 750\text{ mA}$ | —    | 5    | 60                         |    |
| Output voltage                                    | $V_{OUT}$    | 1            | $T_j = 25^\circ\text{C}$<br>$8\text{ V} \leq V_{IN} \leq 21\text{ V}$<br>$5.0\text{ mA} \leq I_{OUT} \leq 1.0\text{ A}$ | 5.7   | —    | 6.3  | V                          |    |
| Quiescent current                                 | $I_B$        | 1            | $T_j = 25^\circ\text{C}$ , $I_{OUT} = 5\text{ mA}$  | —   | 4.3  | 8.0  | mA                         |    |
| Quiescent current change                          | $\Delta I_B$ | 1            | $8.0\text{ V} \leq V_{IN} \leq 25\text{ V}$ ,<br>$I_{OUT} = 5\text{ mA}$ , $T_j = 25^\circ\text{C}$                     | —   | —    | 1.3  | mA                         |    |
| Output noise voltage                              | $V_{NO}$     | 2            | $T_a = 25^\circ\text{C}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$<br>$I_{OUT} = 50\text{ mA}$                        | —   | 55   | —    | $\mu\text{V}_{rms}$        |    |
| Ripple rejection                                  | R.R.         | 3            | $f = 120\text{ Hz}$ , $9\text{ V} \leq V_{IN} \leq 19\text{ V}$<br>$I_{OUT} = 50\text{ mA}$ , $T_j = 25^\circ\text{C}$  | 61  | 77   | —    | dB                         |    |
| Dropout voltage                                   | $V_D$        | 1            | $I_{OUT} = 1.0\text{ A}$ , $T_j = 25^\circ\text{C}$   | —   | 2.0  | —    | V                          |    |
| Short circuit current limit                       | $I_{SC}$     | 1            | $T_j = 25^\circ\text{C}$  | —   | 1.5  | —    | A                          |    |
| Average temperature coefficient of output voltage | $T_{CVO}$    | 1            | $I_{OUT} = 5\text{ mA}$   | —   | -0.7 | —    | $\text{mV}/^\circ\text{C}$ |    |

## TA7807S

### Electrical Characteristics

(Unless otherwise specified,  $V_{IN} = 12\text{ V}$ ,  $I_{OUT} = 500\text{ mA}$ ,  $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ )

| Characteristics                                   | Symbol       | Test Circuit | Test Condition  | Min   | Typ. | Max  | Unit                       |    |
|---|--------------|--------------|---|---|------|------|----------------------------|----|
| Output voltage                                    | $V_{OUT}$    | 1            | $T_j = 25^\circ\text{C}$ , $I_{OUT} = 100\text{ mA}$  | 6.72  | 7.0  | 7.28 | V                          |    |
| Line regulation                                   | Reg-line     | 1            | $T_j = 25^\circ\text{C}$  | $9\text{ V} \leq V_{IN} \leq 25\text{ V}$       | —    | 5    | 140                        | mV |
|   |              |              |   | $10\text{ V} \leq V_{IN} \leq 14\text{ V}$      | —    | 2    | 70                         |    |
| Load regulation                                   | Reg-load     | 1            | $T_j = 25^\circ\text{C}$  | $5\text{ mA} \leq I_{OUT} \leq 1.4\text{ A}$    | —    | 15   | 140                        | mV |
|   |              |              |   | $250\text{ mA} \leq I_{OUT} \leq 750\text{ mA}$ | —    | 5    | 70                         |    |
| Output voltage                                    | $V_{OUT}$    | 1            | $T_j = 25^\circ\text{C}$<br>$9\text{ V} \leq V_{IN} \leq 22\text{ V}$<br>$5.0\text{ mA} \leq I_{OUT} \leq 1.0\text{ A}$ | 6.65  | —    | 7.35 | V                          |    |
| Quiescent current                                 | $I_B$        | 1            | $T_j = 25^\circ\text{C}$ , $I_{OUT} = 5\text{ mA}$  | —   | 4.3  | 8.0  | mA                         |    |
| Quiescent current change                          | $\Delta I_B$ | 1            | $9\text{ V} \leq V_{IN} \leq 25\text{ V}$ ,<br>$I_{OUT} = 5\text{ mA}$ , $T_j = 25^\circ\text{C}$                       | —   | —    | 1.3  | mA                         |    |
| Output noise voltage                              | $V_{NO}$     | 2            | $T_a = 25^\circ\text{C}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$<br>$I_{OUT} = 50\text{ mA}$                        | —   | 60   | —    | $\mu\text{V}_{rms}$        |    |
| Ripple rejection                                  | R.R.         | 3            | $f = 120\text{ Hz}$ , $10\text{ V} \leq V_{IN} \leq 20\text{ V}$<br>$I_{OUT} = 50\text{ mA}$ , $T_j = 25^\circ\text{C}$ | 59  | 75   | —    | dB                         |    |
| Dropout voltage                                   | $V_D$        | 1            | $I_{OUT} = 1.0\text{ A}$ , $T_j = 25^\circ\text{C}$   | —   | 2.0  | —    | V                          |    |
| Short circuit current limit                       | $I_{SC}$     | 1            | $T_j = 25^\circ\text{C}$  | —   | 1.3  | —    | A                          |    |
| Average temperature coefficient of output voltage | $T_{CVO}$    | 1            | $I_{OUT} = 5\text{ mA}$   | —   | -0.8 | —    | $\text{mV}/^\circ\text{C}$ |    |

## TA7808S

### Electrical Characteristics

(Unless otherwise specified,  $V_{IN} = 14\text{ V}$ ,  $I_{OUT} = 500\text{ mA}$ ,  $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ )

| Characteristics                                   | Symbol       | Test Circuit | Test Condition  | Min   | Typ. | Max | Unit                       |    |
|---|--------------|--------------|---|---|------|-----|----------------------------|----|
| Output voltage                                    | $V_{OUT}$    | 1            | $T_j = 25^\circ\text{C}$ , $I_{OUT} = 100\text{ mA}$  | 7.7   | 8.0  | 8.3 | V                          |    |
| Line regulation                                   | Reg-line     | 1            | $T_j = 25^\circ\text{C}$  | $10.5\text{ V} \leq V_{IN} \leq 25\text{ V}$    | —    | 6   | 160                        | mV |
|   |              |              |   | $11\text{ V} \leq V_{IN} \leq 17\text{ V}$      | —    | 2   | 80                         |    |
| Load regulation                                   | Reg-load     | 1            | $T_j = 25^\circ\text{C}$  | $5\text{ mA} \leq I_{OUT} \leq 1.4\text{ A}$    | —    | 12  | 160                        | mV |
|   |              |              |   | $250\text{ mA} \leq I_{OUT} \leq 750\text{ mA}$ | —    | 4   | 80                         |    |
| Output voltage                                    | $V_{OUT}$    | 1            | $T_j = 25^\circ\text{C}$<br>$10.5\text{ V} \leq V_{IN} \leq 23\text{ V}$<br>$5.0\text{ mA} \leq I_{OUT} \leq 1.0\text{ A}$  | 7.6   | —    | 8.4 | V                          |    |
| Quiescent current                                 | $I_B$        | 1            | $T_j = 25^\circ\text{C}$ , $I_{OUT} = 5\text{ mA}$  | —   | 4.3  | 8.0 | mA                         |    |
| Quiescent current change                          | $\Delta I_B$ | 1            | $10.5\text{ V} \leq V_{IN} \leq 25\text{ V}$ ,<br>$I_{OUT} = 5\text{ mA}$ , $T_j = 25^\circ\text{C}$                        | —   | —    | 1.0 | mA                         |    |
| Output noise voltage                              | $V_{NO}$     | 2            | $T_a = 25^\circ\text{C}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$<br>$I_{OUT} = 50\text{ mA}$                            | —   | 70   | —   | $\mu\text{V}_{rms}$        |    |
| Ripple rejection                                  | R.R.         | 3            | $f = 120\text{ Hz}$ , $11.5\text{ V} \leq V_{IN} \leq 21.5\text{ V}$<br>$I_{OUT} = 50\text{ mA}$ , $T_j = 25^\circ\text{C}$ | 58  | 74   | —   | dB                         |    |
| Dropout voltage                                   | $V_D$        | 1            | $I_{OUT} = 1.0\text{ A}$ , $T_j = 25^\circ\text{C}$   | —   | 2.0  | —   | V                          |    |
| Short circuit current limit                       | $I_{SC}$     | 1            | $T_j = 25^\circ\text{C}$  | —   | 1.1  | —   | A                          |    |
| Average temperature coefficient of output voltage | $T_{CVO}$    | 1            | $I_{OUT} = 5\text{ mA}$   | —   | -1.0 | —   | $\text{mV}/^\circ\text{C}$ |    |

## TA7809S

### Electrical Characteristics

(Unless otherwise specified,  $V_{IN} = 15\text{ V}$ ,  $I_{OUT} = 500\text{ mA}$ ,  $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ )

| Characteristics                                   | Symbol       | Test Circuit | Test Condition  | Min   | Typ. | Max  | Unit                       |    |
|---|--------------|--------------|---|---|------|------|----------------------------|----|
| Output voltage                                    | $V_{OUT}$    | 1            | $T_j = 25^\circ\text{C}$ , $I_{OUT} = 100\text{ mA}$  | 8.64  | 9.0  | 9.36 | V                          |    |
| Line regulation                                   | Reg-line     | 1            | $T_j = 25^\circ\text{C}$  | $11.5\text{ V} \leq V_{IN} \leq 26\text{ V}$    | —    | 7    | 180                        | mV |
|   |              |              |   | $13\text{ V} \leq V_{IN} \leq 19\text{ V}$      | —    | 2.5  | 90                         |    |
| Load regulation                                   | Reg-load     | 1            | $T_j = 25^\circ\text{C}$  | $5\text{ mA} \leq I_{OUT} \leq 1.4\text{ A}$    | —    | 12   | 180                        | mV |
|   |              |              |   | $250\text{ mA} \leq I_{OUT} \leq 750\text{ mA}$ | —    | 4    | 90                         |    |
| Output voltage                                    | $V_{OUT}$    | 1            | $T_j = 25^\circ\text{C}$<br>$11.5\text{ V} \leq V_{IN} \leq 24\text{ V}$<br>$5.0\text{ mA} \leq I_{OUT} \leq 1.0\text{ A}$  | 8.55  | —    | 9.45 | V                          |    |
| Quiescent current                                 | $I_B$        | 1            | $T_j = 25^\circ\text{C}$ , $I_{OUT} = 5\text{ mA}$  | —   | 4.3  | 8.0  | mA                         |    |
| Quiescent current change                          | $\Delta I_B$ | 1            | $11.5\text{ V} \leq V_{IN} \leq 26\text{ V}$ ,<br>$I_{OUT} = 5\text{ mA}$ , $T_j = 25^\circ\text{C}$                        | —   | —    | 1.0  | mA                         |    |
| Output noise voltage                              | $V_{NO}$     | 2            | $T_a = 25^\circ\text{C}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$<br>$I_{OUT} = 50\text{ mA}$                            | —   | 75   | —    | $\mu\text{V}_{rms}$        |    |
| Ripple rejection                                  | R.R.         | 3            | $f = 120\text{ Hz}$ , $12.5\text{ V} \leq V_{IN} \leq 22.5\text{ V}$<br>$I_{OUT} = 50\text{ mA}$ , $T_j = 25^\circ\text{C}$ | 56  | 72   | —    | dB                         |    |
| Dropout voltage                                   | $V_D$        | 1            | $I_{OUT} = 1.0\text{ A}$ , $T_j = 25^\circ\text{C}$   | —   | 2.0  | —    | V                          |    |
| Short circuit current limit                       | $I_{SC}$     | 1            | $T_j = 25^\circ\text{C}$  | —   | 1.0  | —    | A                          |    |
| Average temperature coefficient of output voltage | $T_{CVO}$    | 1            | $I_{OUT} = 5\text{ mA}$   | —   | -1.1 | —    | $\text{mV}/^\circ\text{C}$ |    |

## TA7810S

### Electrical Characteristics

(Unless otherwise specified,  $V_{IN} = 16\text{ V}$ ,  $I_{OUT} = 500\text{ mA}$ ,  $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ )

| Characteristics                                   | Symbol       | Test Circuit | Test Condition  | Min   | Typ. | Max  | Unit                       |    |
|---|--------------|--------------|---|---|------|------|----------------------------|----|
| Output voltage                                    | $V_{OUT}$    | 1            | $T_j = 25^\circ\text{C}$ , $I_{OUT} = 100\text{ mA}$  | 9.6   | 10.0 | 10.4 | V                          |    |
| Line regulation                                   | Reg-line     | 1            | $T_j = 25^\circ\text{C}$  | $12.5\text{ V} \leq V_{IN} \leq 27\text{ V}$    | —    | 8    | 200                        | mV |
|   |              |              |   | $14\text{ V} \leq V_{IN} \leq 20\text{ V}$      | —    | 2.5  | 100                        |    |
| Load regulation                                   | Reg-load     | 1            | $T_j = 25^\circ\text{C}$  | $5\text{ mA} \leq I_{OUT} \leq 1.4\text{ A}$    | —    | 12   | 200                        | mV |
|   |              |              |   | $250\text{ mA} \leq I_{OUT} \leq 750\text{ mA}$ | —    | 4    | 100                        |    |
| Output voltage                                    | $V_{OUT}$    | 1            | $T_j = 25^\circ\text{C}$<br>$12.5\text{ V} \leq V_{IN} \leq 25\text{ V}$<br>$5.0\text{ mA} \leq I_{OUT} \leq 1.0\text{ A}$  | 9.5   | —    | 10.5 | V                          |    |
| Quiescent current                                 | $I_B$        | 1            | $T_j = 25^\circ\text{C}$ , $I_{OUT} = 5\text{ mA}$  | —   | 4.3  | 8.0  | mA                         |    |
| Quiescent current change                          | $\Delta I_B$ | 1            | $12.5\text{ V} \leq V_{IN} \leq 27\text{ V}$ ,<br>$I_{OUT} = 5\text{ mA}$ , $T_j = 25^\circ\text{C}$                        | —   | —    | 1.0  | mA                         |    |
| Output noise voltage                              | $V_{NO}$     | 2            | $T_a = 25^\circ\text{C}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$<br>$I_{OUT} = 50\text{ mA}$                            | —   | 80   | —    | $\mu\text{V}_{rms}$        |    |
| Ripple rejection                                  | R.R.         | 3            | $f = 120\text{ Hz}$ , $13.5\text{ V} \leq V_{IN} \leq 23.5\text{ V}$<br>$I_{OUT} = 50\text{ mA}$ , $T_j = 25^\circ\text{C}$ | 55  | 72   | —    | dB                         |    |
| Dropout voltage                                   | $V_D$        | 1            | $I_{OUT} = 1.0\text{ A}$ , $T_j = 25^\circ\text{C}$   | —   | 2.0  | —    | V                          |    |
| Short circuit current limit                       | $I_{SC}$     | 1            | $T_j = 25^\circ\text{C}$  | —   | 0.9  | —    | A                          |    |
| Average temperature coefficient of output voltage | $T_{CVO}$    | 1            | $I_{OUT} = 5\text{ mA}$   | —   | -1.3 | —    | $\text{mV}/^\circ\text{C}$ |    |

## TA7812S

### Electrical Characteristics

(Unless otherwise specified,  $V_{IN} = 19\text{ V}$ ,  $I_{OUT} = 500\text{ mA}$ ,  $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ )

| Characteristics                                   | Symbol       | Test Circuit | Test Condition   | Min   | Typ. | Max  | Unit                       |    |
|---|--------------|--------------|--|---|------|------|----------------------------|----|
| Output voltage                                    | $V_{OUT}$    | 1            | $T_j = 25^\circ\text{C}$ , $I_{OUT} = 100\text{ mA}$   | 11.5  | 12.0 | 12.5 | V                          |    |
| Line regulation                                   | Reg-line     | 1            | $T_j = 25^\circ\text{C}$   | $14.5\text{ V} \leq V_{IN} \leq 30\text{ V}$    | —    | 10   | 240                        | mV |
|   |              |              |  | $16\text{ V} \leq V_{IN} \leq 22\text{ V}$      | —    | 3    | 120                        |    |
| Load regulation                                   | Reg-load     | 1            | $T_j = 25^\circ\text{C}$   | $5\text{ mA} \leq I_{OUT} \leq 1.4\text{ A}$    | —    | 12   | 240                        | mV |
|   |              |              |  | $250\text{ mA} \leq I_{OUT} \leq 750\text{ mA}$ | —    | 4    | 120                        |    |
| Output voltage                                    | $V_{OUT}$    | 1            | $T_j = 25^\circ\text{C}$<br>$14.5\text{ V} \leq V_{IN} \leq 27\text{ V}$<br>$5.0\text{ mA} \leq I_{OUT} \leq 1.0\text{ A}$ | 11.4  | —    | 12.6 | V                          |    |
| Quiescent current                                 | $I_B$        | 1            | $T_j = 25^\circ\text{C}$ , $I_{OUT} = 5\text{ mA}$   | —   | 4.3  | 8.0  | mA                         |    |
| Quiescent current change                          | $\Delta I_B$ | 1            | $14.5\text{ V} \leq V_{IN} \leq 30\text{ V}$ ,<br>$I_{OUT} = 5\text{ mA}$ , $T_j = 25^\circ\text{C}$                       | —   | —    | 1.0  | mA                         |    |
| Output noise voltage                              | $V_{NO}$     | 2            | $T_a = 25^\circ\text{C}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$<br>$I_{OUT} = 50\text{ mA}$                           | —   | 90   | —    | $\mu\text{V}_{rms}$        |    |
| Ripple rejection                                  | R.R.         | 3            | $f = 120\text{ Hz}$ , $15\text{ V} \leq V_{IN} \leq 25\text{ V}$<br>$I_{OUT} = 50\text{ mA}$ , $T_j = 25^\circ\text{C}$    | 55  | 71   | —    | dB                         |    |
| Dropout voltage                                   | $V_D$        | 1            | $I_{OUT} = 1.0\text{ A}$ , $T_j = 25^\circ\text{C}$  | —   | 2.0  | —    | V                          |    |
| Short circuit current limit                       | $I_{SC}$     | 1            | $T_j = 25^\circ\text{C}$   | —   | 0.7  | —    | A                          |    |
| Average temperature coefficient of output voltage | $T_{CVO}$    | 1            | $I_{OUT} = 5\text{ mA}$  | —   | -1.6 | —    | $\text{mV}/^\circ\text{C}$ |    |

## TA7815S

### Electrical Characteristics

(Unless otherwise specified,  $V_{IN} = 23\text{ V}$ ,  $I_{OUT} = 500\text{ mA}$ ,  $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ )

| Characteristics                                   | Symbol       | Test Circuit | Test Condition  | Min   | Typ. | Max   | Unit                       |    |
|---|--------------|--------------|---|---|------|-------|----------------------------|----|
| Output voltage                                    | $V_{OUT}$    | 1            | $T_j = 25^\circ\text{C}$ , $I_{OUT} = 100\text{ mA}$  | 14.4  | 15.0 | 15.6  | V                          |    |
| Line regulation                                   | Reg-line     | 1            | $T_j = 25^\circ\text{C}$  | $17.5\text{ V} \leq V_{IN} \leq 30\text{ V}$    | —    | 11    | 300                        | mV |
|   |              |              |   | $20\text{ V} \leq V_{IN} \leq 26\text{ V}$      | —    | 3     | 150                        |    |
| Load regulation                                   | Reg-load     | 1            | $T_j = 25^\circ\text{C}$  | $5\text{ mA} \leq I_{OUT} \leq 1.4\text{ A}$    | —    | 12    | 300                        | mV |
|   |              |              |   | $250\text{ mA} \leq I_{OUT} \leq 750\text{ mA}$ | —    | 4     | 150                        |    |
| Output voltage                                    | $V_{OUT}$    | 1            | $T_j = 25^\circ\text{C}$<br>$17.5\text{ V} \leq V_{IN} \leq 30\text{ V}$<br>$5.0\text{ mA} \leq I_{OUT} \leq 1.0\text{ A}$  | 14.25   | —    | 15.75 | V                          |    |
| Quiescent current                                 | $I_B$        | 1            | $T_j = 25^\circ\text{C}$ , $I_{OUT} = 5\text{ mA}$  | —   | 4.4  | 8.0   | mA                         |    |
| Quiescent current change                          | $\Delta I_B$ | 1            | $17.5\text{ V} \leq V_{IN} \leq 30\text{ V}$ ,<br>$I_{OUT} = 5\text{ mA}$ , $T_j = 25^\circ\text{C}$                        | —   | —    | 1.0   | mA                         |    |
| Output noise voltage                              | $V_{NO}$     | 2            | $T_a = 25^\circ\text{C}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$<br>$I_{OUT} = 50\text{ mA}$                            | —   | 110  | —     | $\mu\text{V}_{rms}$        |    |
| Ripple rejection                                  | R.R.         | 3            | $f = 120\text{ Hz}$ , $18.5\text{ V} \leq V_{IN} \leq 28.5\text{ V}$<br>$I_{OUT} = 50\text{ mA}$ , $T_j = 25^\circ\text{C}$ | 54  | 70   | —     | dB                         |    |
| Dropout voltage                                   | $V_D$        | 1            | $I_{OUT} = 1.0\text{ A}$ , $T_j = 25^\circ\text{C}$   | —   | 2.0  | —     | V                          |    |
| Short circuit current limit                       | $I_{SC}$     | 1            | $T_j = 25^\circ\text{C}$  | —   | 0.5  | —     | A                          |    |
| Average temperature coefficient of output voltage | $T_{CVO}$    | 1            | $I_{OUT} = 5\text{ mA}$   | —   | -2.0 | —     | $\text{mV}/^\circ\text{C}$ |    |

## TA7818S

### Electrical Characteristics

(Unless otherwise specified,  $V_{IN} = 27\text{ V}$ ,  $I_{OUT} = 500\text{ mA}$ ,  $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ )

| Characteristics                                   | Symbol       | Test Circuit | Test Condition   | Min   | Typ. | Max  | Unit                       |    |
|---|--------------|--------------|--|---|------|------|----------------------------|----|
| Output voltage                                    | $V_{OUT}$    | 1            | $T_j = 25^\circ\text{C}$ , $I_{OUT} = 100\text{ mA}$   | 17.3  | 18.0 | 18.7 | V                          |    |
| Line regulation                                   | Reg-line     | 1            | $T_j = 25^\circ\text{C}$   | $21\text{ V} \leq V_{IN} \leq 33\text{ V}$      | —    | 13   | 360                        | mV |
|   |              |              |  | $24\text{ V} \leq V_{IN} \leq 30\text{ V}$      | —    | 4    | 180                        |    |
| Load regulation                                   | Reg-load     | 1            | $T_j = 25^\circ\text{C}$   | $5\text{ mA} \leq I_{OUT} \leq 1.4\text{ A}$    | —    | 12   | 360                        | mV |
|   |              |              |  | $250\text{ mA} \leq I_{OUT} \leq 750\text{ mA}$ | —    | 4    | 180                        |    |
| Output voltage                                    | $V_{OUT}$    | 1            | $T_j = 25^\circ\text{C}$<br>$21\text{ V} \leq V_{IN} \leq 33\text{ V}$<br>$5.0\text{ mA} \leq I_{OUT} \leq 1.0\text{ A}$ | 17.1  | —    | 18.9 | V                          |    |
| Quiescent current                                 | $I_B$        | 1            | $T_j = 25^\circ\text{C}$ , $I_{OUT} = 5\text{ mA}$   | —   | 4.5  | 8.0  | mA                         |    |
| Quiescent current change                          | $\Delta I_B$ | 1            | $21\text{ V} \leq V_{IN} \leq 33\text{ V}$ ,<br>$I_{OUT} = 5\text{ mA}$ , $T_j = 25^\circ\text{C}$                       | —   | —    | 1.0  | mA                         |    |
| Output noise voltage                              | $V_{NO}$     | 2            | $T_a = 25^\circ\text{C}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$<br>$I_{OUT} = 50\text{ mA}$                         | —   | 125  | —    | $\mu\text{V}_{rms}$        |    |
| Ripple rejection                                  | R.R.         | 3            | $f = 120\text{ Hz}$ , $22\text{ V} \leq V_{IN} \leq 32\text{ V}$<br>$I_{OUT} = 50\text{ mA}$ , $T_j = 25^\circ\text{C}$  | 52  | 68   | —    | dB                         |    |
| Dropout voltage                                   | $V_D$        | 1            | $I_{OUT} = 1.0\text{ A}$ , $T_j = 25^\circ\text{C}$  | —   | 2.0  | —    | V                          |    |
| Short circuit current limit                       | $I_{SC}$     | 1            | $T_j = 25^\circ\text{C}$   | —   | 0.4  | —    | A                          |    |
| Average temperature coefficient of output voltage | $T_{CVO}$    | 1            | $I_{OUT} = 5\text{ mA}$  | —   | -2.5 | —    | $\text{mV}/^\circ\text{C}$ |    |

## TA7820S

### Electrical Characteristics

(Unless otherwise specified,  $V_{IN} = 29\text{ V}$ ,  $I_{OUT} = 500\text{ mA}$ ,  $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ )

| Characteristics                                   | Symbol       | Test Circuit | Test Condition   | Min   | Typ. | Max  | Unit                       |    |
|---|--------------|--------------|--|---|------|------|----------------------------|----|
| Output voltage                                    | $V_{OUT}$    | 1            | $T_j = 25^\circ\text{C}$ , $I_{OUT} = 100\text{ mA}$   | 19.2  | 20.0 | 20.8 | V                          |    |
| Line regulation                                   | Reg-line     | 1            | $T_j = 25^\circ\text{C}$   | $23\text{ V} \leq V_{IN} \leq 35\text{ V}$      | —    | 15   | 400                        | mV |
|   |              |              |  | $26\text{ V} \leq V_{IN} \leq 32\text{ V}$      | —    | 5    | 200                        |    |
| Load regulation                                   | Reg-load     | 1            | $T_j = 25^\circ\text{C}$   | $5\text{ mA} \leq I_{OUT} \leq 1.4\text{ A}$    | —    | 12   | 400                        | mV |
|   |              |              |  | $250\text{ mA} \leq I_{OUT} \leq 750\text{ mA}$ | —    | 4    | 200                        |    |
| Output voltage                                    | $V_{OUT}$    | 1            | $T_j = 25^\circ\text{C}$<br>$23\text{ V} \leq V_{IN} \leq 35\text{ V}$<br>$5.0\text{ mA} \leq I_{OUT} \leq 1.0\text{ A}$ | 19.0  | —    | 21.0 | V                          |    |
| Quiescent current                                 | $I_B$        | 1            | $T_j = 25^\circ\text{C}$ , $I_{OUT} = 5\text{ mA}$   | —   | 4.6  | 8.0  | mA                         |    |
| Quiescent current change                          | $\Delta I_B$ | 1            | $23\text{ V} \leq V_{IN} \leq 35\text{ V}$ ,<br>$I_{OUT} = 5\text{ mA}$ , $T_j = 25^\circ\text{C}$                       | —   | —    | 1.0  | mA                         |    |
| Output noise voltage                              | $V_{NO}$     | 2            | $T_a = 25^\circ\text{C}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$<br>$I_{OUT} = 50\text{ mA}$                         | —   | 135  | —    | $\mu\text{V}_{rms}$        |    |
| Ripple rejection                                  | R.R.         | 3            | $f = 120\text{ Hz}$ , $24\text{ V} \leq V_{IN} \leq 34\text{ V}$<br>$I_{OUT} = 50\text{ mA}$ , $T_j = 25^\circ\text{C}$  | 50  | 66   | —    | dB                         |    |
| Dropout voltage                                   | $V_D$        | 1            | $I_{OUT} = 1.0\text{ A}$ , $T_j = 25^\circ\text{C}$  | —   | 2.0  | —    | V                          |    |
| Short circuit current limit                       | $I_{SC}$     | 1            | $T_j = 25^\circ\text{C}$   | —   | 0.4  | —    | A                          |    |
| Average temperature coefficient of output voltage | $T_{CVO}$    | 1            | $I_{OUT} = 5\text{ mA}$  | —   | -3.0 | —    | $\text{mV}/^\circ\text{C}$ |    |

## TA7824S


### Electrical Characteristics

(Unless otherwise specified,  $V_{IN} = 33\text{ V}$ ,  $I_{OUT} = 500\text{ mA}$ ,  $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ )


| Characteristics                                   | Symbol       | Test Circuit | Test Condition   | Min   | Typ. | Max  | Unit                       |    |
|---|--------------|--------------|--|---|------|------|----------------------------|----|
| Output voltage                                    | $V_{OUT}$    | 1            | $T_j = 25^\circ\text{C}$ , $I_{OUT} = 100\text{ mA}$   | 23.0  | 24.0 | 25.0 | V                          |    |
| Line regulation                                   | Reg-line     | 1            | $T_j = 25^\circ\text{C}$   | $27\text{ V} \leq V_{IN} \leq 38\text{ V}$      | —    | 18   | 480                        | mV |
|   |              |              |  | $30\text{ V} \leq V_{IN} \leq 36\text{ V}$      | —    | 6    | 240                        |    |
| Load regulation                                   | Reg-load     | 1            | $T_j = 25^\circ\text{C}$   | $5\text{ mA} \leq I_{OUT} \leq 1.4\text{ A}$    | —    | 12   | 480                        | mV |
|   |              |              |  | $250\text{ mA} \leq I_{OUT} \leq 750\text{ mA}$ | —    | 4    | 240                        |    |
| Output voltage                                    | $V_{OUT}$    | 1            | $T_j = 25^\circ\text{C}$<br>$27\text{ V} \leq V_{IN} \leq 38\text{ V}$<br>$5.0\text{ mA} \leq I_{OUT} \leq 1.0\text{ A}$ | 22.8  | —    | 25.2 | V                          |    |
| Quiescent current                                 | $I_B$        | 1            | $T_j = 25^\circ\text{C}$ , $I_{OUT} = 5\text{ mA}$   | —   | 4.6  | 8.0  | mA                         |    |
| Quiescent current change                          | $\Delta I_B$ | 1            | $27\text{ V} \leq V_{IN} \leq 38\text{ V}$ ,<br>$I_{OUT} = 5\text{ mA}$ , $T_j = 25^\circ\text{C}$                       | —   | —    | 1.0  | mA                         |    |
| Output noise voltage                              | $V_{NO}$     | 2            | $T_a = 25^\circ\text{C}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$<br>$I_{OUT} = 50\text{ mA}$                         | —   | 150  | —    | $\mu\text{V}_{rms}$        |    |
| Ripple rejection                                  | R.R.         | 3            | $f = 120\text{ Hz}$ , $28\text{ V} \leq V_{IN} \leq 38\text{ V}$<br>$I_{OUT} = 50\text{ mA}$ , $T_j = 25^\circ\text{C}$  | 50  | 66   | —    | dB                         |    |
| Dropout voltage                                   | $V_D$        | 1            | $I_{OUT} = 1.0\text{ A}$ , $T_j = 25^\circ\text{C}$  | —   | 2.0  | —    | V                          |    |
| Short circuit current limit                       | $I_{SC}$     | 1            | $T_j = 25^\circ\text{C}$   | —   | 0.3  | —    | A                          |    |
| Average temperature coefficient of output voltage | $T_{CVO}$    | 1            | $I_{OUT} = 5\text{ mA}$  | —   | -3.5 | —    | $\text{mV}/^\circ\text{C}$ |    |




## Test Circuit 1/Standard Application Circuit






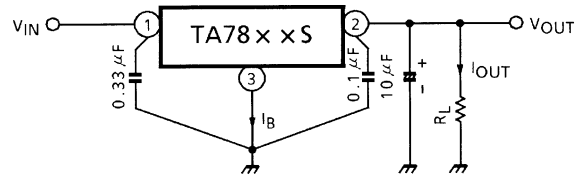








## Test Circuit 2

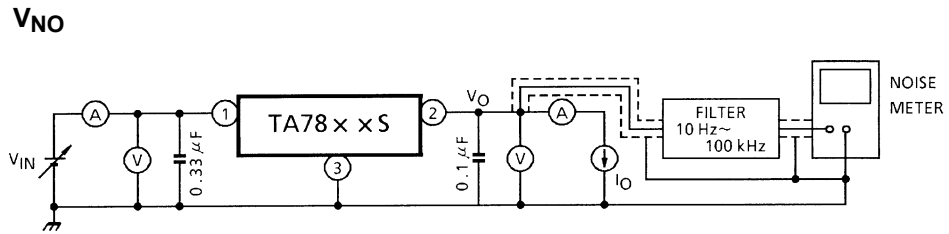


## Test Circuit 3

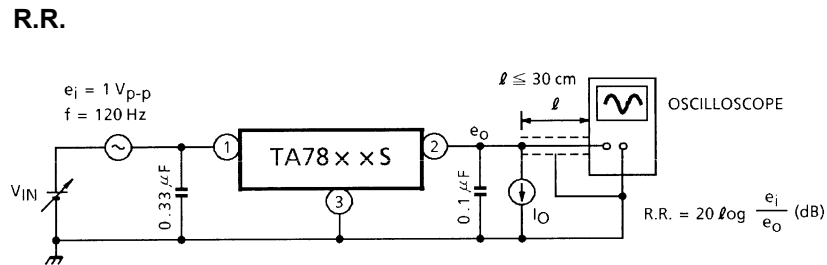

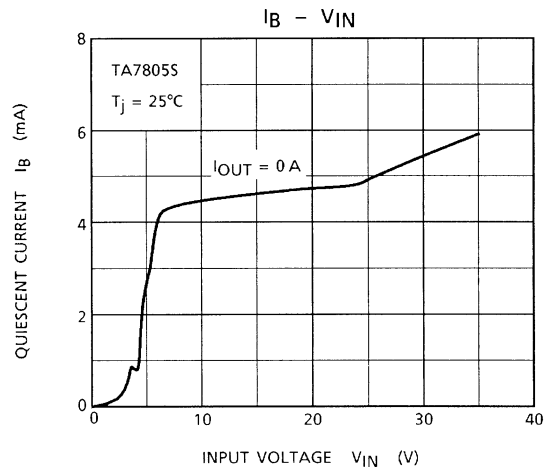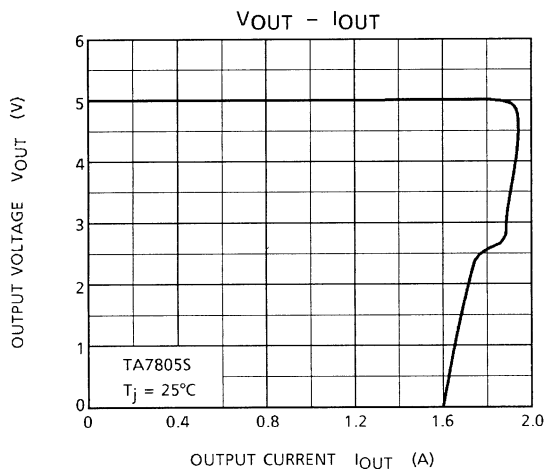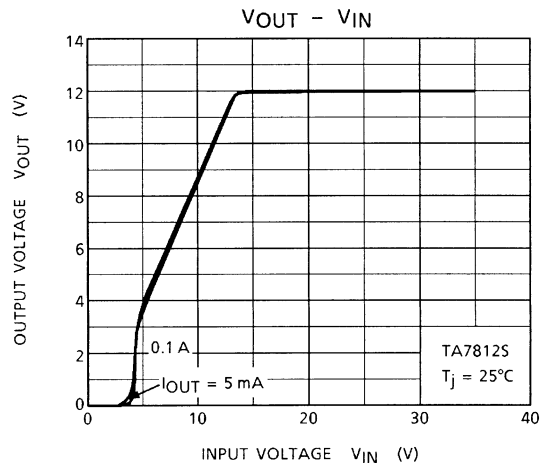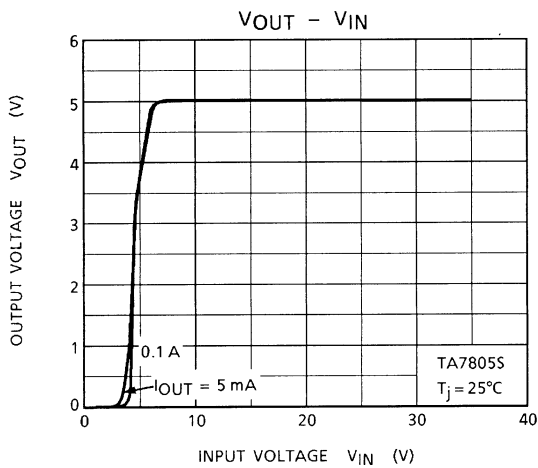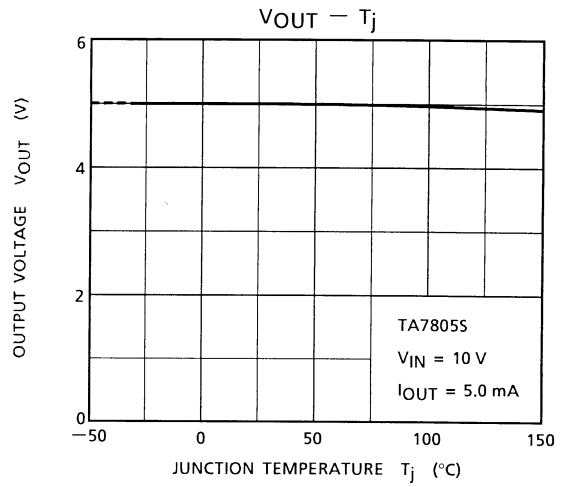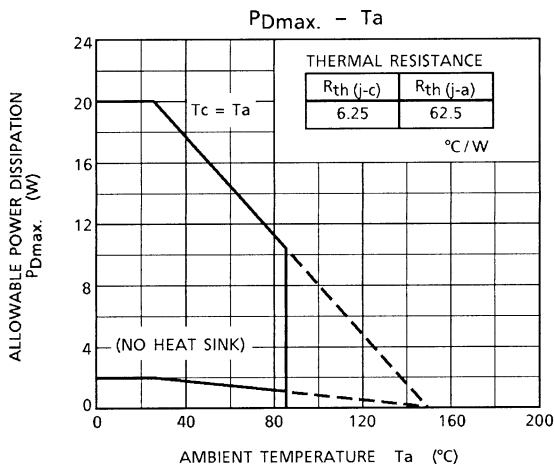


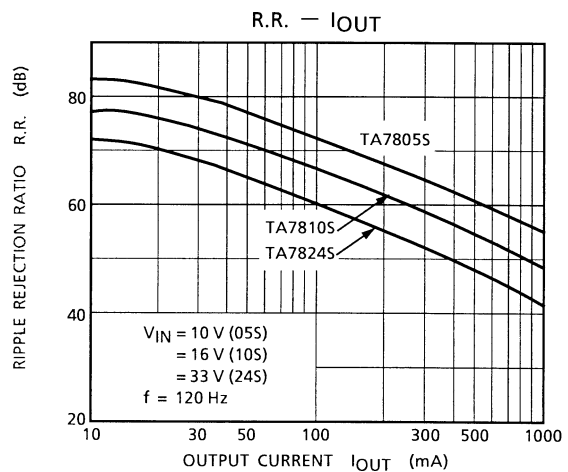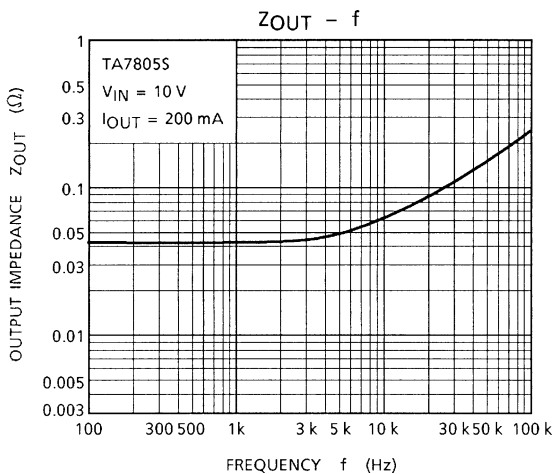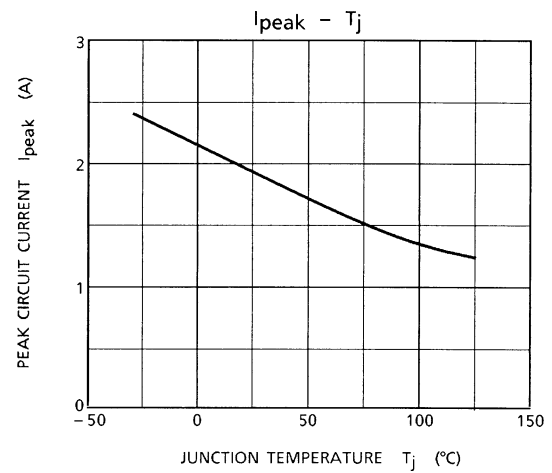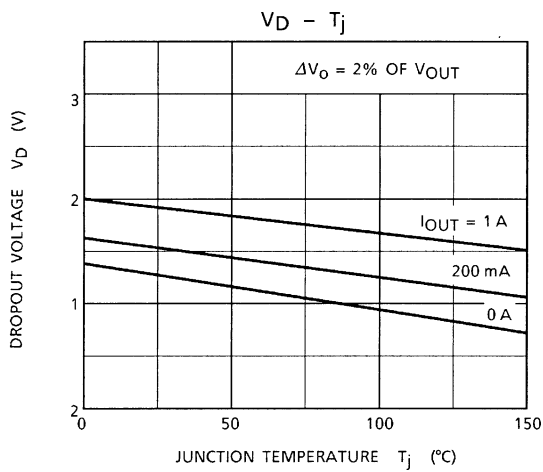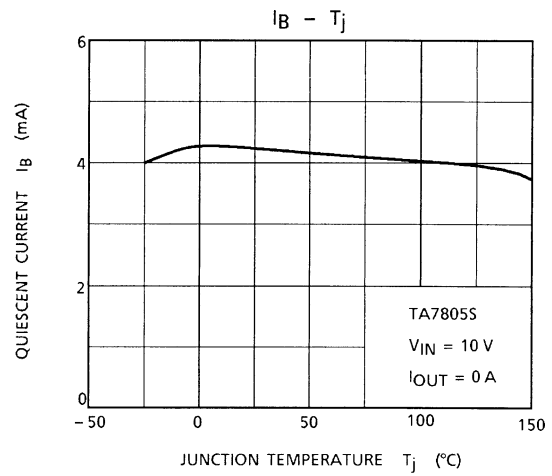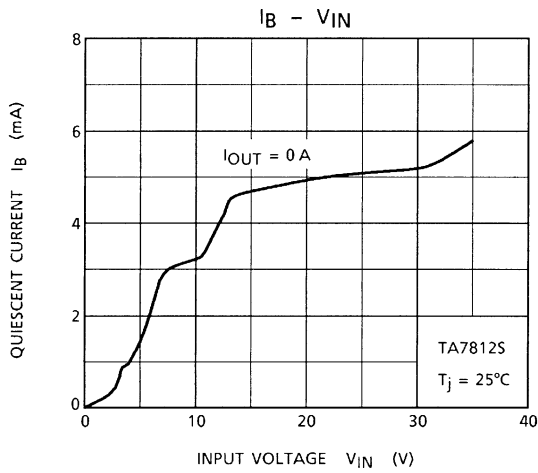

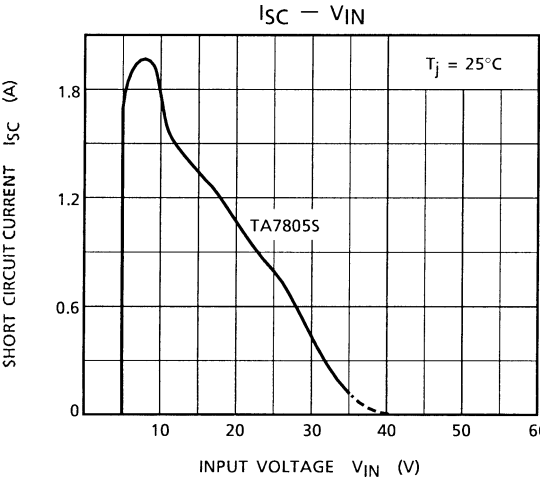


**Precautions on Application**

- (1) In regard to GND, be careful not to apply a negative voltage to the input/output terminal. Further, special care is necessary in case of a voltage boost application.
- (2) When a surge voltage exceeding maximum rating is applied to the input terminal or when a voltage in excess of the input terminal voltage is applied to the output terminal, the circuit may be destroyed. Specially, in the latter case, great care is necessary. Further, if the input terminal shorts to GND in a state of normal operation, the output terminal voltage becomes higher than the input voltage (GND potential), and the electric charge of a chemical capacitor connected to the output terminal flows into the input side, which may cause the destruction of circuit. In these cases, take such steps as a zener diode and a general silicon diode are connected to the circuit, as shown in the following figure.

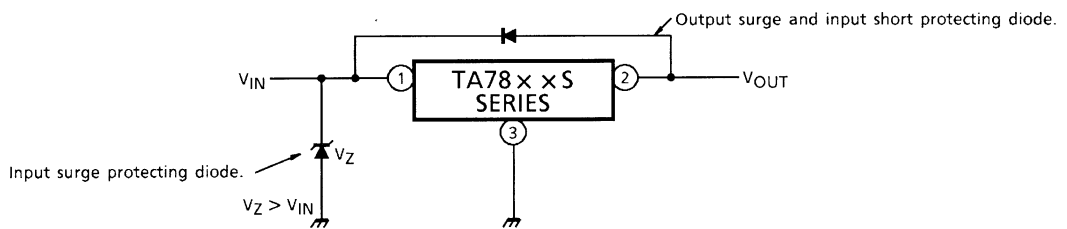

- (3) When the input voltage is too high, the power dissipation of three terminal regulator increases because of series regulator, so that the junction temperature rises. In such a case, it is recommended to reduce the power dissipation by inserting the power limiting resistor  $R_{SD}$  in the input terminal, and to reduce the junction temperature as a result.

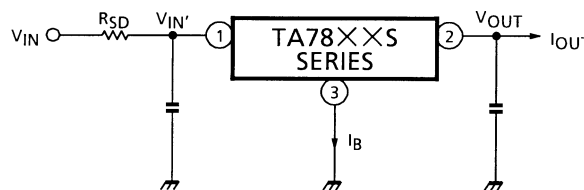

The power dissipation  $P_D$  of IC is expressed in the following equation.

$$P_D = (V_{IN}' - V_{OUT}) \cdot I_{OUT} + V_{IN}' \cdot I_B$$

If  $V_{IN}'$  is reduced below the lowest voltage necessary for the IC, the parasitic oscillation will be caused according to circumstances.

In determining the resistance value of  $R_{SD}$ , design with margin should be made by making reference to the following equation.

$$R_{SD} < \frac{V_{IN} - V_{IN}'}{I_{OUT} + I_B}$$

- (4) Connect the input terminal and GND, and the output terminal and GND, by capacitor respectively. The capacitances should be determined experimentally because they depend on PCB patterns. In particular, adequate investigation should be made so that there is no problem even at time of high or low temperature.

(5) Installation of IC for power supply

For obtaining high reliability on the heat sink design of the regulator IC, it is generally required to derate more than 20% of maximum junction temperature ( $T_j \text{ max}$ ).

Further, full consideration should be given to the installation of IC to the heat sink.

(a) Heat sink design

The thermal resistance of IC itself is required from the viewpoint of the design of elements, but the thermal resistance from the IC package to the open air varies with the contact thermal resistance.

Table 1 shows how much the value of the contact thermal resistance ( $\theta_c + \theta_s$ ) is changed by insulating sheet (mica) and heat sink grease.

Table 1

Unit: °C/W

| Package   | Model No. | Torque  | Mica         | $\theta_c + \theta_s$ |
|-----------|-----------|---------|--------------|-----------------------|
| TO-220NIS | TA78××S   | 0.6 N·m | Not provided | 0.4~0.6 (1.0~1.5)     |

The figures given in parentheses denote the values at time of no grease.

The package of regulator IC serves as GND, therefore, usually use the value at time of “no mica.”

(b) Silicone grease

When a circuit not exceeding maximum rating is designed, it is to be desired that the grease should be used if possible. If it is required that the contact thermal resistance is reduced from the viewpoint of the circuit design, it is recommended that the following methods be adopted. Use YG6260 (TOSHIBA SILICON CORPORATION), if grease is used.

(c) Torque


When installing IC on a heat sink or the like, tighten the IC with the torque of less than the rated value. If it is tightened with the torque in excess of the rated value, sometimes the internal elements of the IC are adversely affected. Therefore, great care should be given to the installing operation.

Further, if polycarbonate screws are used, the torque causes a change with the passage of time, which may lessen the effect of radiation.


## Application Circuits

### (1) Voltage boost regulator


(a) Voltage boost by use of zener diode

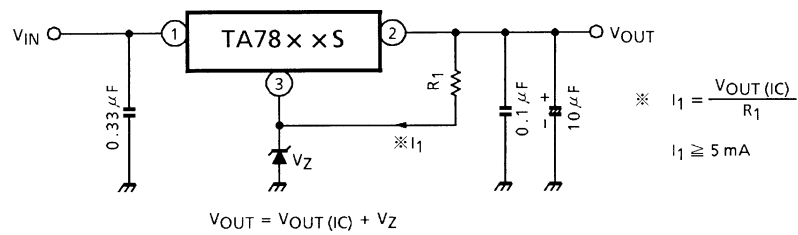


(b) Voltage boost by use of resistor

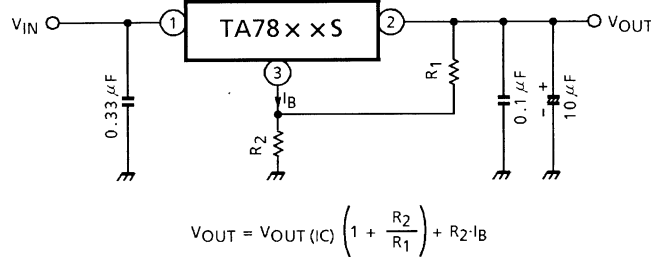

(c) Adjustable output regulator

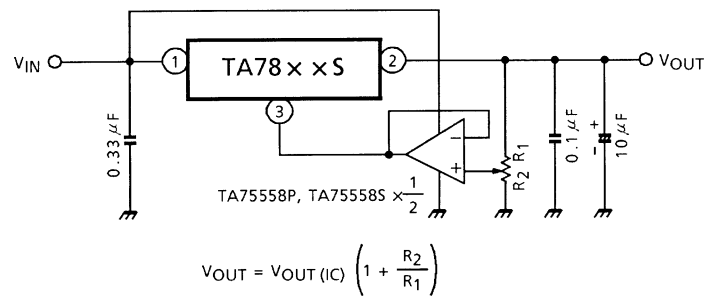

### (2) Current boost regulator

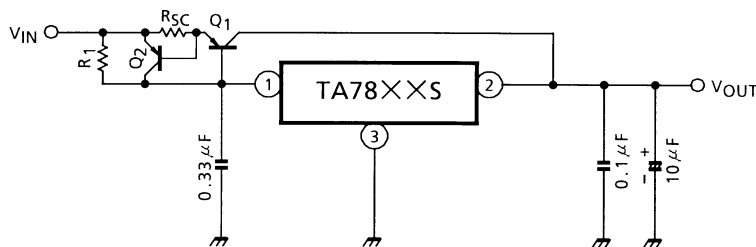

Heat sink is needed for Q<sub>1</sub>.

$$R_1 \leq \frac{V_{BE1}}{I_B \text{ MAX}}$$

where,

$V_{BE1}$  :  $V_{BE}$  of external transistor Q<sub>1</sub>.

$I_B \text{ MAX}$  : Quiescent current of IC.

$$R_{SC} = \frac{V_{BE2}}{I_{SC}}$$


where,

$I_{SC}$  : Short-circuit current.

## Package Dimensions

HSIP3-P-2.54A

Unit: mm

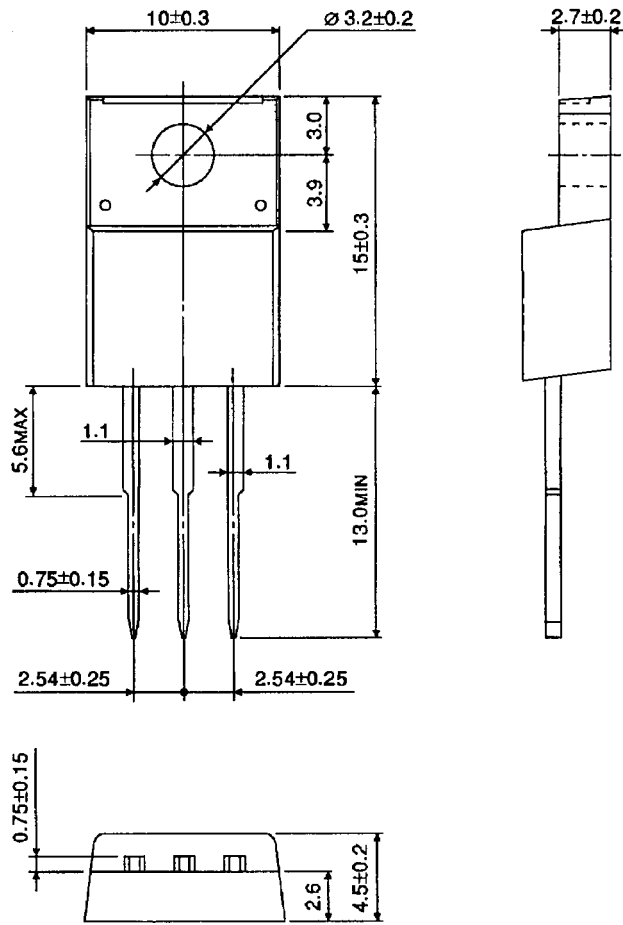

Weight: 1.7 g (typ.)



**RESTRICTIONS ON PRODUCT USE**

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.  
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.