


Knickschutztüllen aus schwarzem PLIOPRENE-TPE



PLIOPRENE TPE
-50 bis +125°C





Typ	Art. Nr.	
12-542 TPE	0146 0130 010	100
12-552 TPE	0146 0140 010	100
12-553 TPE	0146 0150 010	100
12-581 TPE	0146 0160 010	100
12-582 TPE	0146 0170 010	100
12-583 TPE	0146 0180 010	100
12-598 TPE	0146 0190 010	100
12-599 TPE	0146 0200 010	100
12-600 TPE	0146 0210 010	100
12-908 TPE	0146 0220 010	100
12-1372 TPE	0146 0225 010	50
12-1374 TPE	0146 0230 010	100
12-1392 TPE	0146 0240 010	100
12-1459 TPE	0146 0259 010	100
12-1460 TPE	0146 0260 010	100
12-1462 TPE	0146 0250 010	100
12-1466 TPE	0146 0251 010	100
12-1584 TPE	0146 0261 010	100

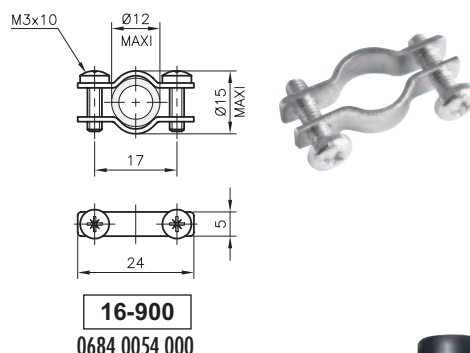


Metallbride für Knickschutztüllen
12-542 ; 12-582 ; 12-583 ; 12-908

16-900 0684 0054 000 100

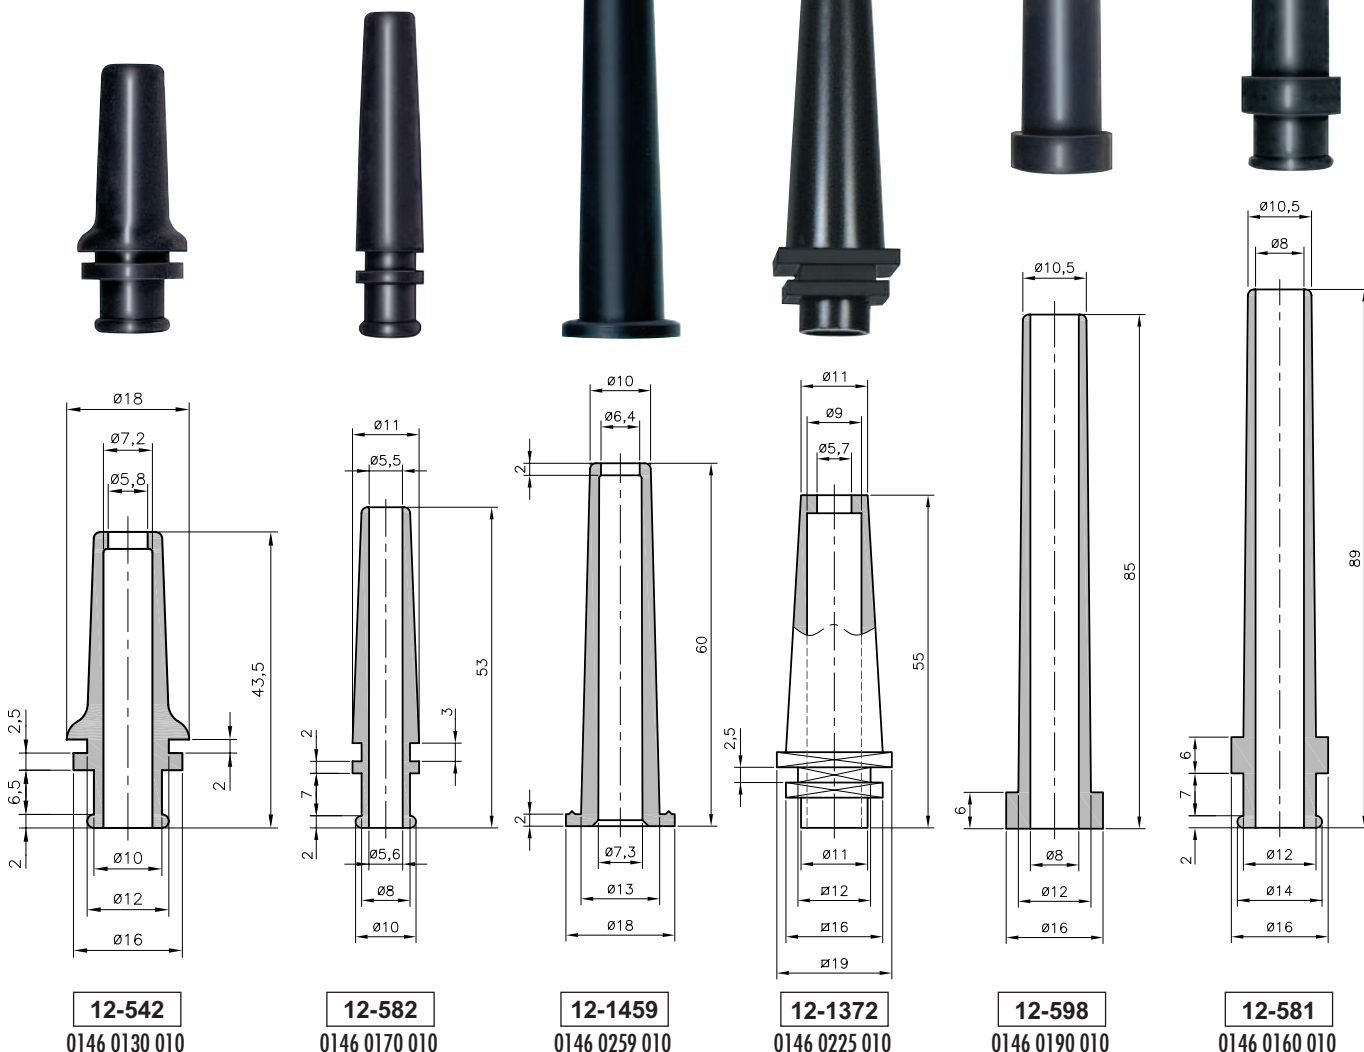


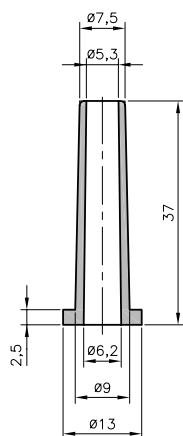


12-1466
0146 0251 010




12-1460
0146 0260 010

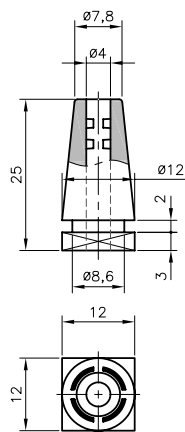


12-1392
0146 0240 010

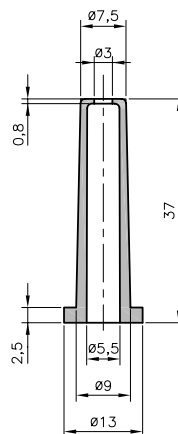


12-1462
0146 0250 010

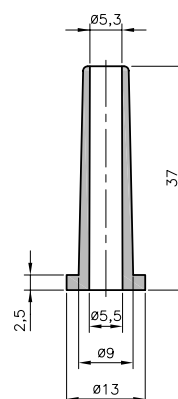


12-600
0146 0210 010

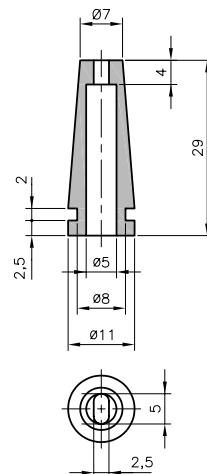


12-1374
0146 0230 010

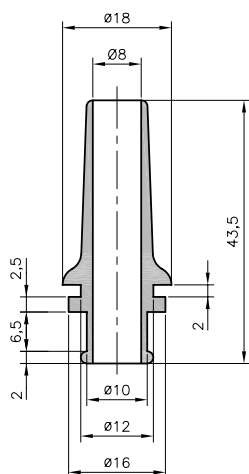


12-908
0146 0220 010

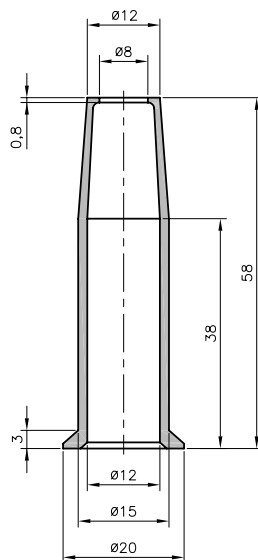


12-552
0146 0140 010

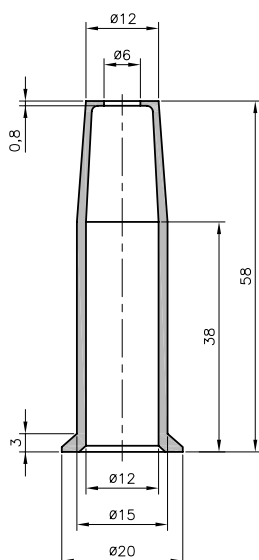


12-1584
0146 0261 010

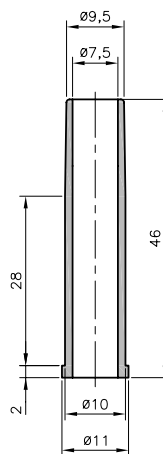

12-553
0146 0150 010

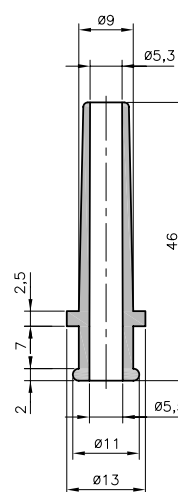


12-583
0146 0180 010

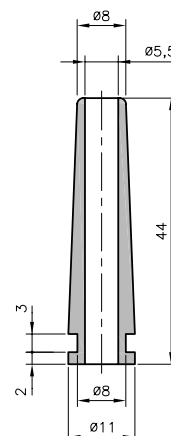


12-599
0146 0200 010

• Füße aus Plioprene in schwarz (-50 bis +125°C)

Typ	Art. Nr.	
12-1086 TPE	0146 0010 010	100
12-1310 TPE	0146 0020 010	100




12-1086
0146 0010 010




12-1310
0146 0020 010

• Spezialdurchführungen aus Plioprene in schwarz (-50 bis +125°C)

Typ	Art. Nr.	
Spezial Durchführungen		
12-1017 TPE	0146 0310 010	100
12-1431 TPE	0146 0330 010	100




12-1017
0146 0310 010

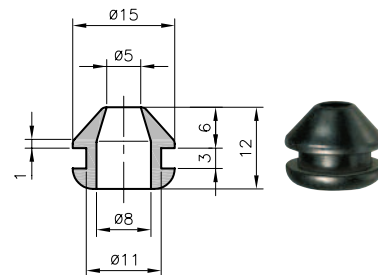


12-1431
0146 0330 010

Durchföhrtülle mit Zugentlastung

12-1428 TPE	0146 0401 010	100
-------------	---------------	-----




12-1428
0146 0401 010

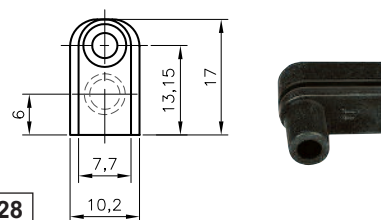


• Knickschutztüllen aus Plioprene
extra-weich in schwarz (-40 bis +70°C)

Typ	Art. Nr.	
12-387 TPE	0146 0110 010	100
12-407 TPE	0146 0120 010	100

Diese Isolationstüllen können mittels unserer Aufweitungen sehr leicht montiert werden (siehe Seite D1/1).






12-387
0146 0110 010







12-407
0146 0120 010

• **Spezialdurchführungen aus Plioprene in schwarz**


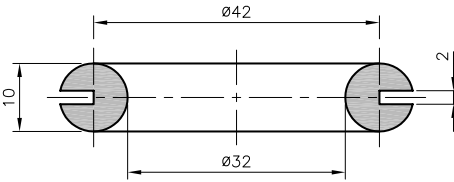
Typ	Art. Nr.			
12-1461 TPE	0146 0331 010	100	 12-1461 0146 0331 010	
12-1480 TPE	0146 0332 010	50	 12-1480 0146 0332 010	

• **Durchführungstüllen DO-TPE mit Langloch aus schwarzem Pliopren zum Schutz von Flachkabeln**




Typ	Art. Nr.				
DO-TPE 19/27/33/3	0144 0351 010	100			
DO-TPE 29/37/43/3	0144 0352 010	100			
DO-TPE 44/52/58/3	0144 0353 010	100			



DO 19/27/33/3
0144 0351 010

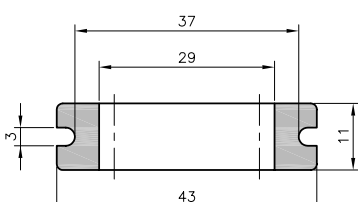

DO 29/37/43/3
0144 0352 010

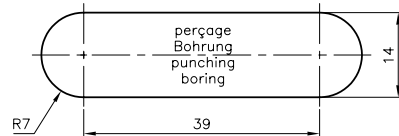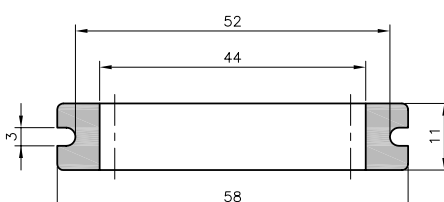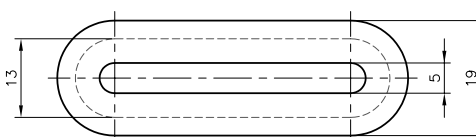

DO 44/52/58/3
0144 0353 010