

Abmessungen ±0,5 / dimensions ±,5 [mm]/
Ohne Maßstab / not scaled [mm]



GT class 155 (F)
E254189 insulation system
E332779 general purpose



DIN EN 61558



EN 61558




2002/95/EG



Nicht kurzschlussfest
Not short-circuit proof

Primärspannung / input voltage 2x115 V
max. Nennleistung / output power 3,2 VA
Frequenz / frequency 50-60 Hz

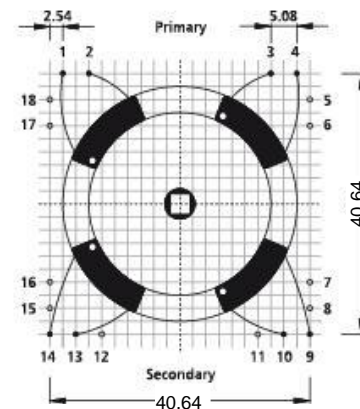

RKT (44,7x44,7x19,5)

Bestellnummer/ order number	Sek.-spannung/ output voltage	Sek.-strom/ output current	Stifte Primär/ pinning primary	Stifte Sekundär/ pinning secondary
L01-6010	2 x 7 V	2 x 229 mA	1/2/3/4	9/10/13/14
L01-6011	2 x 9 V	2 x 178 mA	1/2/3/4	9/10/13/14
L01-6012	2 x 12 V	2 x 133 mA	1/2/3/4	9/10/13/14
L01-6013	2 x 15 V	2 x 107 mA	1/2/3/4	9/10/13/14
L01-6014	2 x 18 V	2 x 89 mA	1/2/3/4	9/10/13/14
L01-6015*	2 x 22 V	2 x 73 mA	1/2/3/4	9/10/13/14

*Keine VDE Zulassung / No VDE approval

Änderungen vorbehalten/ subject to change