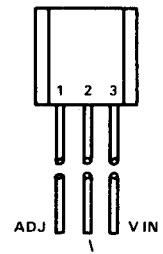
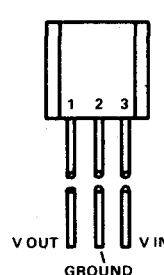
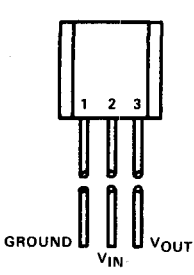
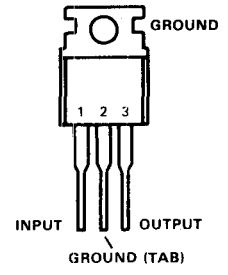
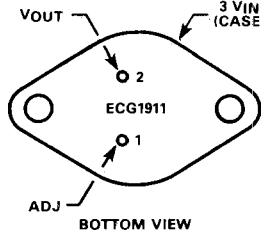
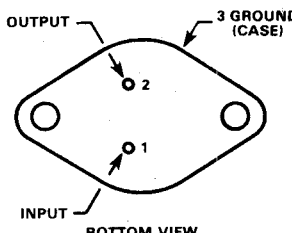
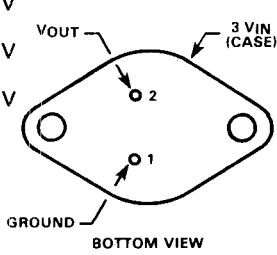
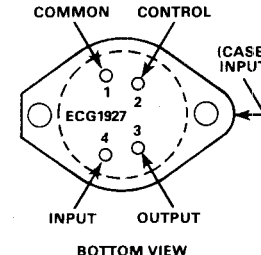
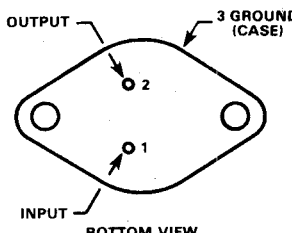
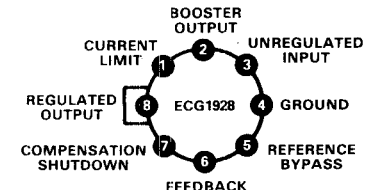
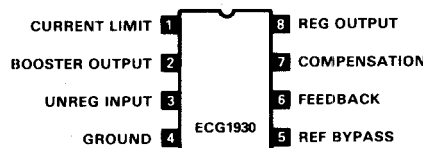


# Linear IC and Module Circuits (cont'd)

<p><b>ECG1900</b> TO-92 See Fig. L16 3-Terminal Pos Adj Voltage Regulator, <math>V_O = 1.2 \text{ V to } 37 \text{ V}</math>, <math>I_O = 100 \text{ mA}</math>, <math>V_{in} = 40 \text{ Vmax}</math>; <math>2.45 \text{ Vmin}</math>, <math>PD = 625 \text{ mW}</math></p> <p><b>ECG1901</b> 3-Terminal Neg Adj Voltage Regulator, <math>V_O = -1.2 \text{ V to } -37 \text{ V}</math>, <math>I_O = 100 \text{ mA}</math>, <math>V_{in} = -40 \text{ Vmax}</math>, <math>-2.45 \text{ Vmin}</math>, <math>PD = 625 \text{ mW}</math></p> 	<p><b>ECG1902</b> TO-92 See Fig. L16 3-Terminal Pos Fixed Voltage Regulators, Output = 9 V, 100 mA</p> <p><b>ECG1906</b> Output = 18 V</p> <p><b>ECG1908</b> Output = 24 V</p> 	<p><b>ECG1903</b> TO-92 See Fig. L16 3-Terminal Neg Fixed Voltage Regulators, Output = -12 V, 100 mA</p> <p><b>ECG1905</b> Output = -15 V</p> <p><b>ECG1907</b> Output = -18 V</p> <p><b>ECG1909</b> Output = -24 V</p> <p><b>ECG1917</b> Output = -5 V</p> 
<p><b>ECG1910</b> TO-220 See Fig. L17 Positive Voltage Regulator, 9 V @ 1 A</p> 	<p><b>ECG1911</b> TO-3 See Fig. L11 3-Terminal Neg Adj Voltage Regulator, <math>V_O = -1.2 \text{ V to } -37 \text{ V}</math>, <math>I_O = 1.5 \text{ A}</math>, <math>V_{in} = -40 \text{ Vmax}</math>, <math>-2.45 \text{ Vmin}</math>, <math>PD = 20 \text{ W}</math></p> 	<p><b>ECG1912</b> TO-3 See Fig. L11 3-Terminal Pos Fixed Voltage Regulators, Output = 12 V, 3 A</p> <p><b>ECG1914</b> Output = 12 V, 1.5 A</p> <p><b>ECG1916</b> Output = 15 V, 1.5 A</p> <p><b>ECG1918</b> Output = 15 V, 3 A</p> <p><b>ECG1920</b> Output = 18 V, 1.5 A</p> <p><b>ECG1924</b> Output = 24 V, 1.5 A</p> 
<p><b>ECG1913</b> TO-3 See Fig. L11 3-Terminal Neg Fixed Voltage Regulators, Output = -5 V, 1.5 A</p> <p><b>ECG1915</b> Output = -12 V</p> <p><b>ECG1919</b> Output = -15 V</p> <p><b>ECG1923</b> Output = -18 V</p> <p><b>ECG1925</b> Output = -24 V</p> 	<p><b>ECG1927</b> TO-3, 4-Pin See Fig. L11B 4-Terminal Neg Adj Voltage Regulator, <math>V_O = -2.2 \text{ V to } -30 \text{ V}</math>, <math>I_O = 1 \text{ A}</math>, <math>V_{in} = -40 \text{ Vmax}</math>, <math>-4.7 \text{ Vmin}</math>, <math>PD = 15 \text{ W}</math></p> 	
<p><b>ECG1928</b> TO-5, 8-Pin See Fig. L3 Positive Adj Voltage Regulator, Output = 4.5 to 30 V</p> 	<p><b>ECG1930</b> 8-Pin DIP See Fig. L98 Positive Adj Voltage Regulator, Output = 5 to 37 V</p> 	<p><b>ECG1932</b> TO-220 See Fig. L17 Positive Voltage Regulator, 10 V @ 1 A</p> 