

TYPES SN54LS354, SN54LS355, SN54LS356, SN54LS357, SN74LS354, SN74LS355, SN74LS356, SN74LS357 8-LINE TO 1-LINE DATA SELECTORS/MULTIPLEXERS/REGISTERS

D2544, JULY 1979—REVISED APRIL 1985


- **Transparent Latches on Data Select Inputs**
- **Choice of Data Registers:**
Transparent ('LS354, 'LS355)
Edge-Triggered ('LS356, 'LS357)
- **Choice of Outputs:**
Three-State ('LS354, 'LS356)
Open-Collector ('LS355, 'LS357)
- **Complementary Outputs**
- **Easily Expandable**
- **High-Density 20-Pin Package**

description


These monolithic data selectors/multiplexers contain full on-chip binary decoding to select one of eight data sources. The data-select address is stored in transparent latches that are enabled by a low level on pin 11, \overline{SC} . On the 'LS354 and 'LS355 a similar enable for data is obtained by a low level on pin 9, \overline{DC} . The edge-triggered data registers of the 'LS356 and 'LS357 are clocked by a low-to-high transition on pin 9, CLK. Complementary outputs are available in either three-state versions ('LS354 and 'LS356) or open-collector versions ('LS355 and 'LS357).

The SN54LS354 through SN54LS357 are characterized for operation over the full military temperature range of -55°C to 125°C ; the SN74LS354 through SN74LS357 are characterized for operation from 0°C to 70°C .


SN54LS354, SN54LS355 . . . J PACKAGE
SN74LS354, SN74LS355 . . . DW, J OR N PACKAGE
(TOP VIEW)




SN54LS354, SN54LS355 . . . FK PACKAGE
SN74LS354, SN74LS355 . . . FN PACKAGE
(TOP VIEW)



SN54LS356, SN54LS357 . . . J PACKAGE
SN74LS357, SN74LS357 . . . DW, J OR N PACKAGE
(TOP VIEW)



SN54LS356, SN54LS357 . . . FK PACKAGE
SN74LS356, SN74LS357 . . . FN PACKAGE
(TOP VIEW)



PRODUCTION DATA
This document contains information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

TEXAS INSTRUMENTS

POST OFFICE BOX 225012 • DALLAS, TEXAS 75266

3-1001

3
TTL DEVICES


**TYPES SN54LS354, SN54LS355, SN54LS356, SN54LS357,
SN74LS354, SN74LS355, SN74LS356, SN74LS357**
8-LINE TO 1-LINE DATA SELECTORS/MULTIPLEXERS/REGISTERS

FUNCTION TABLE

SELECT			DATA CONTROL ('LS354, 'LS355)	CLOCK ('LS356, 'LS357)	OUTPUT ENABLES			OUTPUTS	
S2	S1	S0			G1	G2	G3	W	Y
X	X	X	X	X	H	X	X	Z	Z
X	X	X	X	X	X	H	X	Z	Z
X	X	X	X	X	X	X	L	Z	Z
L	L	L	L	L	L	L	H	$\bar{D}0$	$\bar{D}0$
L	L	L	H	H or L	L	L	H	$\bar{D}0_n$	$\bar{D}0_n$
L	L	H	L	L	L	L	H	$\bar{D}1$	D1
L	L	H	H	H or L	L	L	H	$\bar{D}1_n$	D1_n
L	H	L	L	L	L	L	H	$\bar{D}2$	D2
L	H	L	H	H or L	L	L	H	$\bar{D}2_n$	D2_n
L	H	H	L	L	L	L	H	$\bar{D}3$	D3
L	H	H	H	H or L	L	L	H	$\bar{D}3_n$	D3_n
H	L	L	L	L	L	L	H	$\bar{D}4$	D4
H	L	L	H	H or L	L	L	H	$\bar{D}4_n$	D4_n
H	L	H	L	L	L	L	H	$\bar{D}5$	D5
H	L	H	H	H or L	L	L	H	$\bar{D}5_n$	D5_n
H	H	L	L	L	L	L	H	$\bar{D}6$	D6
H	H	L	H	H or L	L	L	H	$\bar{D}6_n$	D6_n
H	H	H	L	L	L	L	H	$\bar{D}7$	D7
H	H	H	H	H or L	L	L	H	$\bar{D}7_n$	D7_n


H = high level (steady state)
 L = low level (steady state)
 X = irrelevant (any input, including transitions)
 Z = high-impedance state (off state)
 = transition from low to high level
 D0 ... D7 = the level of steady-state inputs at inputs D0 through D7, respectively, at the time of the low-to-high clock transition in the case of 'LS356 and 'LS357
 D0_n ... D7_n = the level of steady state inputs at inputs D0 through D7, respectively, before the most recent low-to-high transition of data control or clock
 This column shows the input address setup with $\bar{S}C$ low.

TYPICAL OF BOTH OUTPUTS ON 'LS355 AND 'LS357




schematics of inputs and outputs


EQUIVALENT OF EACH DATA OR SELECT INPUT



EQUIVALENT OF ALL OTHER INPUTS



TYPICAL OF BOTH OUTPUTS ON 'LS354 AND 'LS356



absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage (see Note 1)	7 V
Input voltage	7 V
Operating free-air temperature range: SN54LS'	-55° C to 125° C
SN74LS'	0° C to 70° C
Storage temperature range	-65° C to 150° C

NOTE 1: Voltage values are with respect to network ground terminal.





3

TTL DEVICES



**TYPES SN54LS354, SN54LS355, SN54LS356, SN54LS357,
SN74LS354, SN74LS355, SN74LS356, SN74LS357
8-LINE TO 1-LINE DATA SELECTORS/MULTIPLEXERS/REGISTERS**

logic symbols

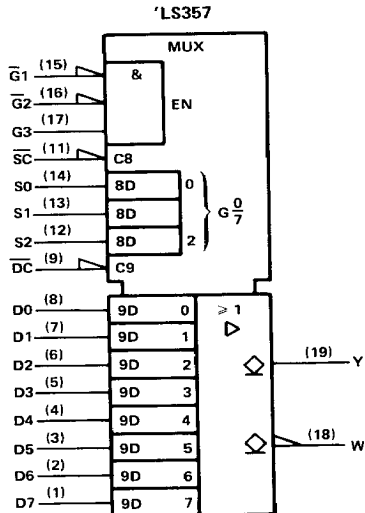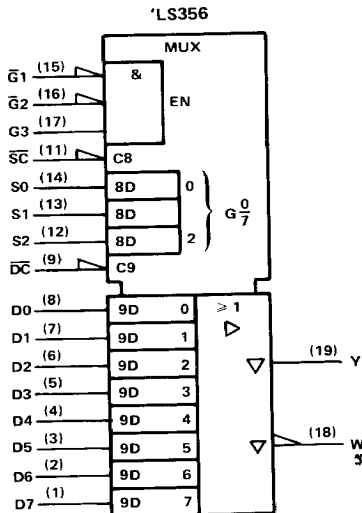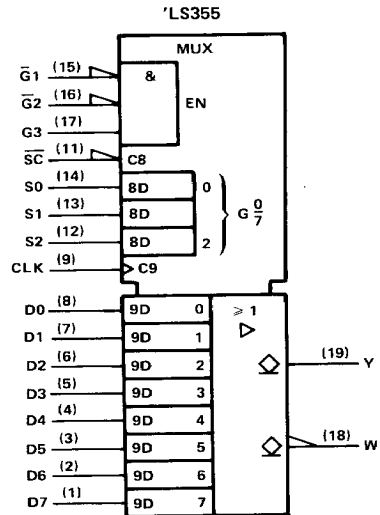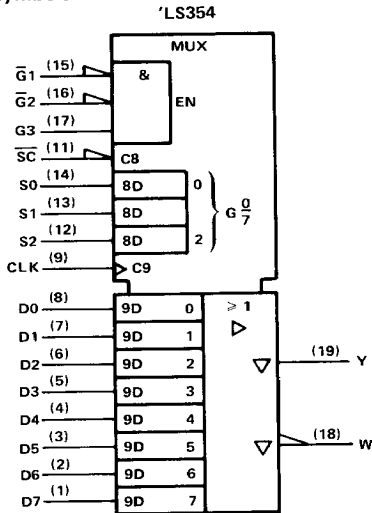

Pin numbers shown on logic notation are for DW, J or N packages.

3

TTL DEVICES

TEXAS
INSTRUMENTS


POST OFFICE BOX 225012 • DALLAS, TEXAS 75285

3-1003

TYPES SN54LS354, SN54LS355, SN74LS354, SN74LS355
8-LINE TO 1-LINE DATA SELECTORS/MULTIPLEXERS/REGISTERS

logic diagram (positive logic)

'LS354, 'LS355

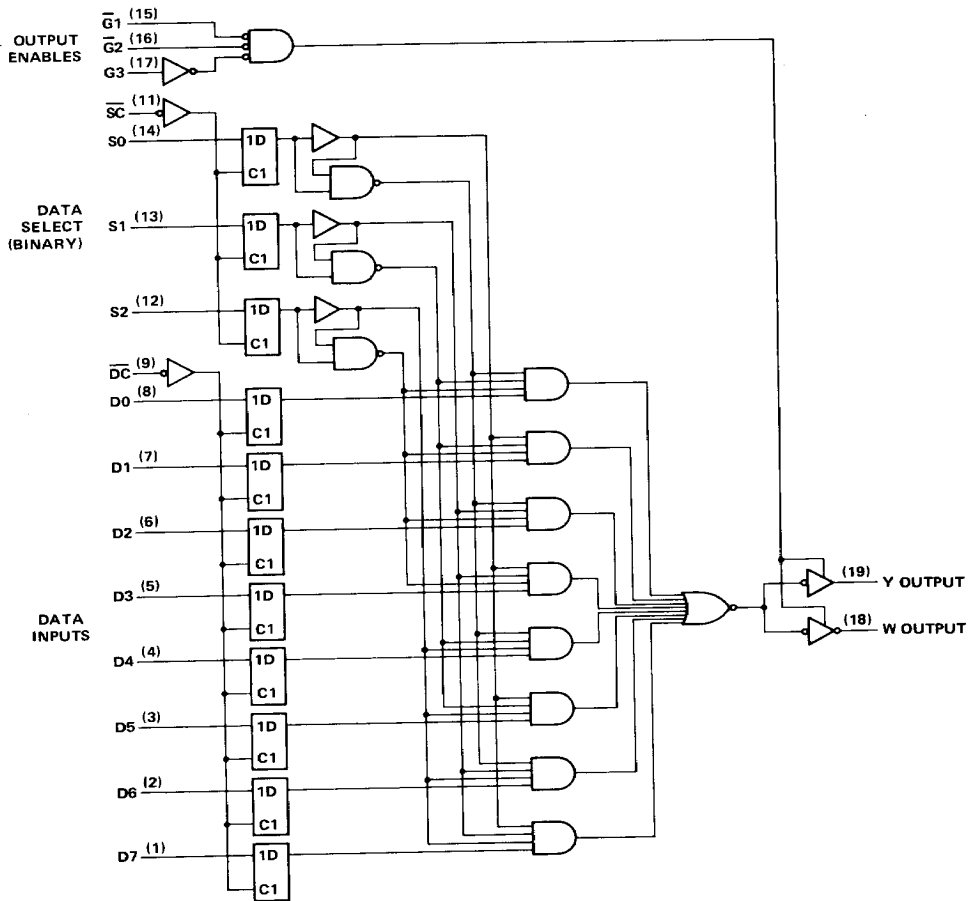

Pin numbers shown on logic notation are for DW, J or N packages.


3
TTL DEVICES

3-1004

TEXAS INSTRUMENTS
 POST OFFICE BOX 225012 • DALLAS, TEXAS 75265

TYPES SN54LS356, SN54LS357, SN74LS356, SN74LS357
8-LINE TO 1-LINE DATA SELECTORS/MULTIPLEXERS/REGISTERS

logic diagram (positive logic)

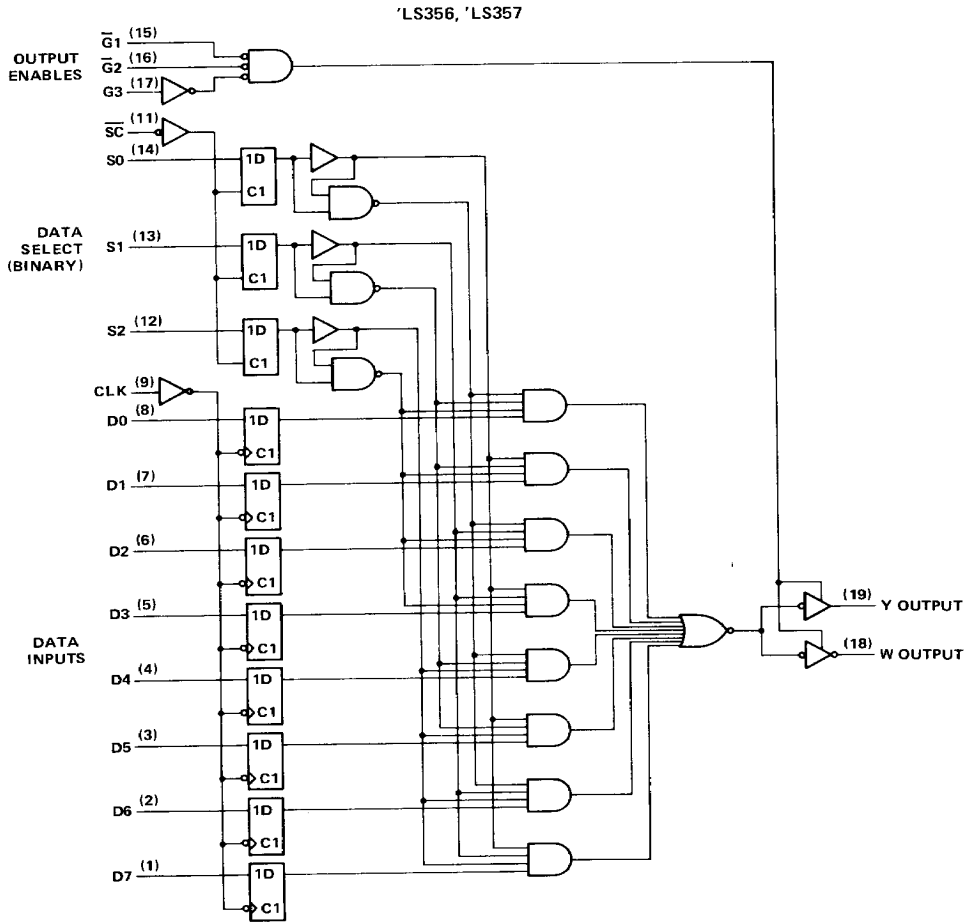

Pin numbers shown on logic notation are for DW, J or N packages.

3

TTL DEVICES

TYPES SN54LS354, SN54LS356, SN74LS354, SN74LS356
8-LINE TO 1-LINE DATA SELECTORS/MULTIPLEXERS/REGISTERS
WITH 3-STATE OUTPUTS

recommended operating conditions

	SN54LS354 SN54LS356			SN74LS354 SN74LS356			UNIT
	MIN	NOM	MAX	MIN	NOM	MAX	
V _{CC} Supply voltage	4.5	5	5.5	4.75	5	5.25	V
V _{IH} High-level input voltage	2			2			V
V _{IL} Low-level input voltage				0.7			0.8
I _{OH} High-level output current				-1			-2.6
I _{OL} Low-level output current				12			24
t _{su} Setup times, high-or-low-level data (with respect to \uparrow at pin 9)	'LS354	15		15			ns
	'LS356	15		15			
t _h Hold times, high-or-low-level data (with respect to \uparrow at pin 9)	'LS354	15		15			ns
	'LS356	0		0			
T _A Operating free-air temperature	-55		125	0		70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS†	SN54LS354 SN54LS356		SN74LS354 SN74LS356		UNIT		
		MIN	TYP‡	MAX	MIN		TYP‡	MAX
V _{IK}	V _{CC} = MIN, I _I = -18 mA			-1.5		V		
V _{OH}	V _{CC} = MIN, V _{IH} = 2 V, V _{IL} = MAX, I _{OH} = MAX	2.4		2.4		V		
V _{OL}	V _{CC} = MIN, V _{IH} = 2 V, V _{IL} = MAX	I _{OL} = 12 mA		0.25	0.4	0.25	0.4	
		I _{OL} = 24 mA				0.35	0.5	
I _{OZ}	V _{CC} = MAX	V _O = 2.7 V		20		20		
		V _O = 0.4 V		-20		-20		
				0.1		0.1		
I _I	V _{CC} = MAX, V _I = 7 V			20		20		
I _{IH}	V _{CC} = MAX, V _I = 2.7 V							
I _{IL}	DC or CLK, \bar{G} ₁ , \bar{G} ₂ , G ₃ All others	V _{CC} = MAX, V _I = 0.4 V		-0.2		-0.2		
				-0.4		-0.4		
				-30		-130		
t _{OS} §	V _{CC} = MAX			-30		-130		
I _{CC}	V _{CC} = MAX, See Note 2	29		46		29		46

† For conditions shown as MIN or MAX, use the appropriate values specified under recommended operating conditions.

‡ All typical values are at V_{CC} = 5 V, T_A = 25°C.

§ Not more than one output should be shorted at a time, and duration of the short-circuit should not exceed one second.

NOTE 2: I_{CC} is measured with the inputs grounded and the outputs open.

3 TTL DEVICES

TYPES SN54LS354, SN54LS356, SN74LS354, SN74LS356
8-LINE TO 1-LINE DATA SELECTORS/MULTIPLEXERS/REGISTERS
WITH 3-STATE OUTPUTS

switching characteristics, $V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{C}$, $R_L = 667\ \Omega$

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	'LS354			'LS356			UNIT		
				MIN	TYP	MAX	MIN	TYP	MAX			
t_{PLH}	D0-D7	Y	$C_L = 45\ \mu\text{F}$, See Note 3	24		36				ns		
t_{PHL}					23		35					
t_{PLH}		W			18		27			ns		
t_{PHL}					29		44					
t_{PLH}	\overline{DC} or CLK	Y		28		42	18		27	ns		
t_{PHL}					26		39	33			50	
t_{PLH}		W			22		33	24		36	ns	
t_{PHL}					33		50	18		27		
t_{PLH}	S0, S1 S2	Y	29		44	30		45	ns			
t_{PHL}				24		45	28			48		
t_{PLH}		W		28		42	36		54	ns		
t_{PHL}				34		51	30		45			
t_{PLH}	\overline{SC}	Y	34		51	36		54	ns			
t_{PHL}				31		47	40			60		
t_{PLH}		W		27		41	32		48	ns		
t_{PHL}				40		60	36		54			
t_{PZH}	$\overline{G1}, \overline{G2}$	Y	14		27	14		25	ns			
t_{PZL}				18		27	17			25		
t_{PHZ}			$C_L = 5\ \mu\text{F}$, See Note 3		15		25	16			24	ns
t_{PLZ}					15		25	16			24	
t_{PZH}		W		$C_L = 45\ \mu\text{F}$, See Note 3	12		24	14		23		
t_{PZL}					16		24	16		23		
t_{PHZ}				$C_L = 5\ \mu\text{F}$, See Note 3	15		25	16		23		
t_{PLZ}					15		25	16		23		
t_{PZH}	G3	Y		$C_L = 45\ \mu\text{F}$, See Note 3	15		29	15		27	ns	
t_{PZL}					19		29	18		27		
t_{PHZ}			$C_L = 5\ \mu\text{F}$, See Note 3	15		25	16		25			
t_{PLZ}				15		25	16		25			
t_{PZH}		W	$C_L = 45\ \mu\text{F}$, See Note 3	13		25	14		25	ns		
t_{PZL}				17		25	16		25			
t_{PHZ}			$C_L = 5\ \mu\text{F}$, See Note 3	15		25	16		25			
t_{PLZ}				15		25	16		25			

NOTE 3: See General Information Section for load circuits and voltage waveforms.

3

TTL DEVICES



POST OFFICE BOX 225012 • DALLAS, TEXAS 75265

3-1007

TYPES SN54LS355, SN54LS357, SN74LS355, SN74LS357
8-LINE TO 1-LINE DATA SELECTORS/MULTIPLEXERS/REGISTERS
WITH OPEN-COLLECTOR OUTPUTS

recommended operating conditions

		SN54LS355			SN74LS355			UNIT		
		SN54LS357			SN74LS357					
		MIN	NOM	MAX	MIN	NOM	MAX			
V_{CC}	Supply voltage	4.5	5	5.5	4.75	5	5.25	V		
V_{IH}	High-level input voltage	2			2			V		
V_{IL}	Low-level input voltage				0.7			0.8	V	
V_{OH}	High-level output voltage				5.5			5.5	V	
I_{OL}	Low-level output current				12			24	mA	
t_{su}	Setup times, high-or-low-level data, (with respect to t at pin 9)	'LS355	15		15			ns		
		'LS357	15		15					
t_h	Hold times, high-or low-level data (with respect to t at pin 9)	'LS355	15		15			ns		
		'LS357	0		0					
T_A	Operating free-air temperature	- 55			125			0	70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS [†]		SN54LS355			SN74LS355			UNIT	
				SN54LS357			SN74LS357				
				MIN	TYP [‡]	MAX	MIN	TYP [‡]	MAX		
V_{IK}		$V_{CC} = \text{MIN}, I_I = -18 \text{ mA}$		- 1.5			- 1.5			V	
I_{OH}		$V_{CC} = \text{MIN}, V_{IH} = 2 \text{ V}, V_{IL} = \text{MAX}$ $V_{OH} = 5.5 \text{ V}$		0.1			0.1			mA	
V_{OL}		$V_{CC} = \text{MIN}, V_{IH} = 2 \text{ V}, V_{IL} = \text{MAX}$		$I_{OL} = 12 \text{ mA}$		0.25		0.4		V	
				$I_{OL} = 24 \text{ mA}$				0.35			
I_I		$V_{CC} = \text{MAX}, V_I = 7 \text{ V}$		0.1			0.1			mA	
I_{IH}		$V_{CC} = \text{MAX}, V_I = 2.7 \text{ V}$		20			20			μA	
I_{IL}	DC or CLK, $\bar{G}1, \bar{G}2, G3$	$V_{CC} = \text{MAX}, V_I = 0.4 \text{ V}$		- 0.2		- 0.2		- 0.2		mA	
	All others			- 0.4		- 0.4		- 0.4			
I_{CC}		$V_{CC} = \text{MAX},$ See Note 2		29		46		29		46	mA

[†] For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable type.

[‡] All typical values are at $V_{CC} = 5 \text{ V}, T_A = 25^\circ \text{C}$.

NOTE 2: I_{CC} is measured with the inputs grounded and the outputs open.

3

TTL DEVICES

TYPES SN54LS355, SN54LS357, SN74LS355, SN74LS357
8-LINE TO 1-LINE DATA SELECTORS/MULTIPLEXERS/REGISTERS
WITH OPEN-COLLECTOR OUTPUTS

switching characteristics, $V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{C}$, $R_L = 667\ \Omega$

PARAMETER ¹	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	'LS355			'LS357			UNIT
				MIN	TYP	MAX	MIN	TYP	MAX	
t_{PLH}	D0-D7	Y	$C_L = 45\ \text{pF}$, See Note 3	34	41				ns	
t_{PHL}				26	39					
t_{PLH}		W		30	45				ns	
t_{PHL}				33	50					
t_{PLH}	\overline{DC} or CLK	Y		38	57		27	41	ns	
t_{PHL}				31	47		34	51		
t_{PLH}		W		33	50		32	48	ns	
t_{PHL}				39	59		23	35		
t_{PLH}	S0, S1, S2	Y		39	59		38	57	ns	
t_{PHL}				36	49		40	60		
t_{PLH}		W		32	48		38	57	ns	
t_{PHL}				39	58		35	53		
t_{PLH}	\overline{SC}	Y	45	68		44	66	ns		
t_{PHL}			42	63		41	62			
t_{PLH}		W	44	66		41	62	ns		
t_{PHL}			45	68		41	62			
t_{PHL}	$\overline{G}1, \overline{G}2$	Y	21	32		18	27	ns		
t_{PHL}			22	33		18	27			
t_{PLH}		W	18	27		20	30	ns		
t_{PHL}			19	29		21	32			
t_{PLH}	G3	Y	24	36		24	36	ns		
t_{PHL}			25	40		24	36			
t_{PLH}		W	19	31		19	31	ns		
t_{PHL}			19	29		19	29			

NOTE 3: See General Information Section for load circuits and voltage waveforms.

3

TTL DEVICES



POST OFFICE BOX 225012 • DALLAS, TEXAS 75265

3-1009