


REV.	DATE	FILE No.
1.0	2010-3-1	CC310UL-FF-3M 3N

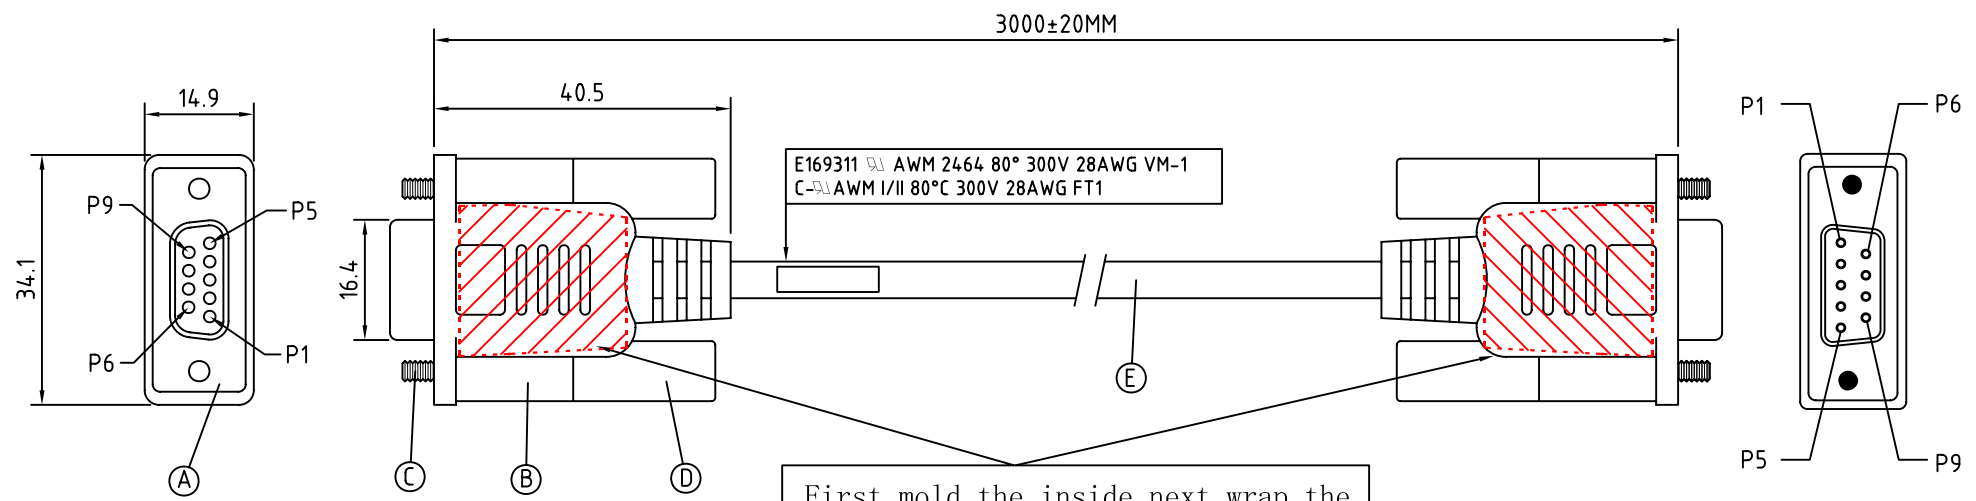

First mold the inside, next wrap the aluminium foil, later mold the outside.
 先啤内模, 再包铝箔纸, 最后成型外模.

WIRING DIAGREAM

DB9 FEMALE	DB9 FEMALE
1 -----	7+8
2 -----	3
3 -----	2
4 -----	6
5 -----	5
6 -----	4
7+8 -----	1
SHELL -----	SHELL

SPECIFICATION:

ITEM	PART NAME	MATEIAL	COLOR	QTY
A	DB9-MSN1010LR 9P.D-SUB SOLDER" F"BU	P.B	NICKEL	2
B	MODEL TY-129 TYPE	P.V.C	GREY	2
C	TS040X360TNOPO 40X376 SCREW	MILD STEEL	NICKEL	4
D	MODEL TY-276 TYPE	P.V.C	GREY	4
E	UL2464#28X9+1GY (0.12/7TX9C+0.16/7T+AL)X1C #5MM	P.V.C	GREY	3M

NOTE:ALL MATERIALS ARE COMPLIANCE TO "RoHS".

CUSTOMER: DIGGELMANN		
CUST P/N: 9/9FF-3N		
S/O:	S/N:	PART No.: CC310UL-FF-3M/GY#R
DRAWING No.	CC-310-37	PART NAME: DB9F-DB9F(9C+1)28AWG(MOLDED)
DRAWING BY	Guo.Yang	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM TOLERANCE:DECIMAL .X ±0.1 .XX ±0.05 ANGLE ±1/2°
CHECKED BY	LingQi.M	
APPROVER BY	Chen.Han	
		SHEET 1 OF 1
		SCALE NO