

∅ 3 & 5mm LED's

standard



ATTENTION
Observe Precautions
for Handling
Electrostatic Sensitive
Devices

- low cost solution
- colours: red / green / yellow / amber
- diffused epoxy
- good quality for any application
- RoHS compliant




Part No.	Peak Wavelength (nm)	Luminous Intensity (mcd)	Viewing Angle 2θ ^{1/2} (deg.)	Forward Voltage V _F (V)		Lens Colour	Typ
		typ.		typ.	max.		
L3-A301	635	40	40°	2.0	2.6	amber diffused	1
L3-G301	568	40	40°	2.2	2.6	green diffused	1
L3-R301	700	8	40°	2.2	2.6	red diffused	1
L3-Y301	585	30	40°	2.1	2.6	yellow diffused	1


L5-A501	635	40	40°	2.0	2.6	amber diffused	2
L5-G501	568	40	40°	2.2	2.6	green diffused	2
L5-R501	700	8	40°	2.2	2.6	red diffused	2
L5-Y501	585	30	40°	2.1	2.6	yellow diffused	2

Electro-Optical-Characteristics Ta=25°C, IF=20mA
Storage Temp. -40 ~+100 (°C) Operating Temp. -40 ~+85 (°C)

Typ 1

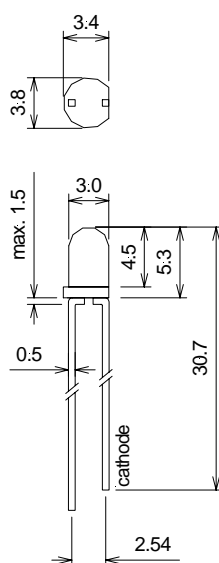

Typ 2

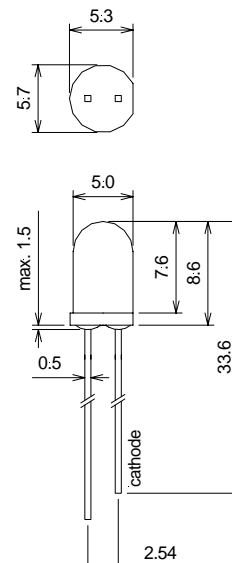

1. All specifications according to information from our manufacturers, without additional guarantee on our part
2. All dimensions are in millimetres
3. Tolerance is ±0.25mm unless otherwise specified
4. Specifications are subject to change without notice