


order number: J01002A1288

BNC Straight Plug Crimp G2 (RG-59 B/U) crimp/crimp Professional



Fig. may differ

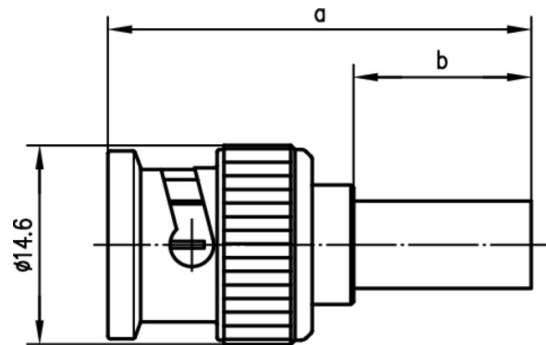

Technical Attributes	
Z	75 Ω
Cable group; cable	G2 (RG-59 B/U)
Remarks	crimp/crimp Professional
Dimensions	a=31, b=13
Assembly	A0231
MIL-Std.	UG-1789/U
Crimp Dies	N01003A0056

### Description of the Series/Product Category

Notice: The following information refer to the series/product category as a whole. Please see the specific datasheet for specific technical information of a particular product.

The BNC series is the most commonly used coax connector. With its bayonet coupling mechanism this connector can be used up to 4 GHz. Both 50 and 75 Ω impedances are available. Connector styles are available for flexible, conformable and semi-rigid cable types. Versions of the BNC connector are available for mounting to printed circuit boards using both through-hole soldered and through-hole press-fit techniques. Both crimp and clamp cable ter...

Mating face sealing for BNC connectors between plug and jack (mated) according to IP 54. The classifications are general statements for the relevant series. Individual connectors may deviate from the values shown. If in doubt, please consult our engineers.

Mechanical Characteristics	
Mating cycles (gold plating inner conductor)	1000 (0.8 µm)
Material: bayonet (coupling nut)	zinc diecast
Material: outer conductor	brass
Material: coupling spring	copper beryllium
Material: inner conductor	brass
Material: crimp ferrule	copper
Material: insulators	PTFE
Plating finish: Bayonet (Coupling nut)	Nickel
Finish: Outer conductor	Nickel
Finish: Inner conductor	Gold (0.8 µ)
Durability (Steckungen)	≥ 500
Finish: Crimp ferrule	Nickel
Material: spring contacts	CuBe2; CuPb1.15Ni1
Material: outer conductor	CuZn39Pb3
Material: other metal parts	CuZn39Pb3
Material: insulators	PTFE; PE
Material: gaskets	Silicone
Finish: Inner conductor	Cu1Ni2Au0.8
Finish: Outer conductor	Cu2Ni5 (Nickel); Ag2CuSnZn0.5 (Optargen)
Finish: Other metal parts	Cu2Ni5

Climatic Characteristics	
Temperature range in °C	-65/165
Types with PTFE insulator	40/155/21
Types with PE insulator	40/75/21

Electrical Characteristics	
Contact resistance inner conductor (initial)	≤ 0.9 mΩ
Contact resistance inner conductor	≤ 20 mΩ

	$\leq 0.2 \text{ m}\Omega$
Contact resistance outer conductor	$\leq 5 \text{ m}\Omega$
Insulation resistance	5 G $\Omega$
Insulation resistance	$\geq 5 \text{ G}\Omega$
Voltage proof	1,5 kV
Voltage proof	1.5 kV <sub>eff</sub> /50 Hz
Impedance	50 $\Omega$ / 75 $\Omega$
Impedance	50 $\Omega$ /(75 $\Omega$ )
Working voltage	500 V <sub>eff</sub> / 50 Hz
Working voltage	500 V <sub>eff</sub> / 50 Hz
Return loss: Straight style	$\geq 20 \text{ dB}/3 \text{ GHz}$ (50 $\Omega$ types)
Frequency range	4 GHz
Return loss: Angle style	$\geq 17.7 \text{ dB} / 3 \text{ GHz}$ (50 $\Omega$ types)
	$\leq 1.25 / 1 \text{ GHz}$
Working voltage	$\leq 500 \text{ V}_{\text{eff}}/50 \text{ Hz}$
Frequency range up to	4 GHz

<b>Standards</b>
IEC 61 169-8

### Note

Combination connectors and cable clamps can be utilised to create a further number of BNC connector variations.

### Note

Combination connectors and cable clamps can be utilised to create a further number of BNC connector variations.