



## PLIOFINE SAM


Shrink ratio: 2/1

<b>Material:</b>	cross-linked Polyolefin
<b>Operating temperatures:</b>	-55 to +125°C
<b>Min. shrink temperature:</b>	120°C
<b>Longitudinal change:</b>	±10 % ASTM D2671
<b>Dielectric strength:</b>	20 kV/mm IEC 243
<b>Flammability:</b>	self-extinguishing ASTM D2671
<b>Fluid resistance:</b>	good to excellent ISO 1817, ISO 37 MIL-1-23053
<b>Application:</b>	general purpose


On special request, we will deliver the sleeving certified UL 224. Please contact us.



Heat shrinkable tubing PLIOFINE is composed of cross-linked Polyolefin (derived from polyethylene), unlike heat shrinkable sleeving PLIO "R" it cannot be melted or welded and has excellent chemical properties. It is cost effective. Dielectric properties, ageing and weather resistance are excellent, and the sleeving needs no special storing conditions as it remains inert up to +50°C.

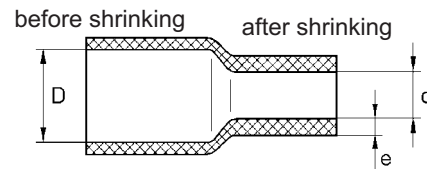

## • Cardboard reel


type	article number black 010	D mm	d mm	e mm	 m
<b>SAM 1,2</b>	0603 0005 010	1,2	0,6	0,45	150
<b>SAM 1,6</b>	0603 0010 010	1,6	0,8	0,45	150
<b>SAM 2,4</b>	0603 0020 010	2,4	1,2	0,51	150
<b>SAM 3,2</b>	0603 0030 010	3,2	1,6	0,51	150
<b>SAM 4,8</b>	0603 0050 010	4,8	2,4	0,5	75
<b>SAM 6,4</b>	0603 0060 010	6,4	3,2	0,64	75
<b>SAM 9,5</b>	0603 0080 010	9,5	4,8	0,64	75
<b>SAM 12,7</b>	0603 0090 010	12,7	6,4	0,64	50
<b>SAM 16,0</b>	0603 0100 010	16	8	0,64	50
<b>SAM 19,0</b>	0603 0110 010	19	9,5	0,76	50
<b>SAM 25,4</b>	0603 0120 010	25,4	12,7	0,89	50
<b>SAM 32,0</b>	0603 0130 010	32	16	0,89	50
<b>SAM 38,1</b>	0603 0140 010	38,1	19	1,02	30
<b>SAM 50,8</b>	0603 0150 010	50,8	25,4	1,14	30
<b>SAM 76,2</b>	0603 0160 010	76,2	38,1	1,27	25
<b>SAM 101</b>	0603 0170 010	101,6	50,8	1,4	25






## • Length of 1,22 m

The heat shrinkable sleeving is cut during the manufacturing. This is why it is straight and easy to use. It is not flattened and has no folds which you meet on sleeving on reels.

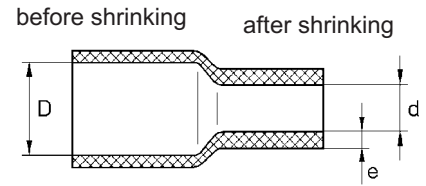


type	art. number black 010	D mm	d mm	e mm	 pce
<b>SAM 1,2</b>	0603 0006 010	1,2	0,6	0,45	25
<b>SAM 1,6</b>	0603 0011 010	1,6	0,8	0,45	25
<b>SAM 2,4</b>	0603 0021 010	2,4	1,2	0,51	25
<b>SAM 3,2</b>	0603 0031 010	3,2	1,6	0,51	25
<b>SAM 4,8</b>	0603 0051 010	4,8	2,4	0,5	25
<b>SAM 6,4</b>	0603 0061 010	6,4	3,2	0,64	25
<b>SAM 9,5</b>	0603 0081 010	9,5	4,8	0,64	25
<b>SAM 12,7</b>	0603 0091 010	12,7	6,4	0,64	25
<b>SAM 16,0</b>	0603 0101 010	16	8	0,64	25
<b>SAM 19,0</b>	0603 0111 010	19	9,5	0,76	25
<b>SAM 25,4</b>	0603 0121 010	25,4	12,7	0,89	10
<b>SAM 32,0</b>	0603 0131 010	32	16	0,89	10
<b>SAM 38,1</b>	0603 0141 010	38,1	19	1,02	10
<b>SAM 50,8</b>	0603 0151 010	50,8	25,4	1,14	10
<b>SAM 76,2</b>	0603 0161 010	76,2	38,1	1,27	10
<b>SAM 101</b>	0603 0171 010	101,6	50,8	1,4	10



Heat shrinkable sleeving in lengths are available per piece or per complete pack.

## • Dispenser box

type	art. number black 010	D mm	d mm	e mm	 m
<b>SAM 1,6</b>	0603 0210 010	1,6	0,8	0,45	17
<b>SAM 2,4</b>	0603 0220 010	2,4	1,2	0,51	15
<b>SAM 3,2</b>	0603 0230 010	3,2	1,6	0,51	15
<b>SAM 4,8</b>	0603 0240 010	4,8	2,4	0,5	12
<b>SAM 6,4</b>	0603 0250 010	6,4	3,2	0,64	12
<b>SAM 9,5</b>	0603 0260 010	9,5	4,8	0,64	8
<b>SAM 12,7</b>	0603 0270 010	12,7	6,4	0,64	8
<b>SAM 16,0</b>	0603 0275 010	16	8	0,64	6
<b>SAM 19,0</b>	0603 0280 010	19	9,5	0,76	5
<b>SAM 25,4</b>	0603 0290 010	25,4	12,7	0,89	5



 A4/90-01 - Bench support for PLIOFINE

