



PLIOFINE B-EX Shrink ratio: 2/1

Material: cross-linked Polyolefin
Operating temperatures: -55 to +135°C
Min. shrink temperature: 120°C
Longitudinal change: ±5 %
Dielectric strength: 20 kV/mm
Flame resistance: self-extinguishing
Fluid resistance: good to excellent
Application: professional use

Composed of cross-linked Polyolefin (derived from polyethylene), this heat shrinkable sleeving has good dielectric properties. Also ageing and weather resistance are excellent, and the sleeving needs no special storing conditions.

On special request, we can deliver the sleeving certified UL 224. Please contact us.



Standard colours:




Semi-standard colour, available only for types B-EX 240 to B-EX 2540:



Example for order:

code group	detail article	code colour
0739	x x x x	x x x

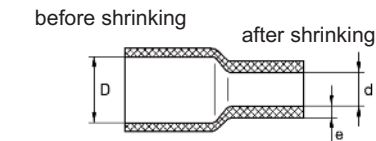

type	before shrinking			cardboard reel article number.	m		length of 1,22 m article number.	pc	dispenser box article number. *	m
	D	d	e		black	colours				
B-EX 120	1,2	0,6	0,45	0739 0001 ***	150	150	0739 0021 ***	25	-	-
B-EX 160	1,6	0,8	0,45	0739 0002 ***	150	150	0739 0022 ***	25	0739 0210 ***	11
B-EX 240	2,4	1,2	0,51	0739 0003 ***	150	150	0739 0023 ***	25	0739 0220 ***	10
B-EX 320	3,2	1,6	0,51	0739 0004 ***	150	150	0739 0024 ***	25	0739 0230 ***	10
B-EX 480	4,8	2,4	0,51	0739 0005 ***	75	75	0739 0025 ***	25	0739 0240 ***	8
B-EX 640	6,4	3,2	0,64	0739 0006 ***	75	75	0739 0026 ***	25	0739 0250 ***	7
B-EX 950	9,5	4,8	0,64	0739 0007 ***	75	75	0739 0027 ***	25	0739 0260 ***	6
B-EX 1270	12,7	6,4	0,64	0739 0008 ***	50	50	0739 0028 ***	25	0739 0270 ***	5
B-EX 1600	16	8	0,76	0739 0016 ***	50	50	0739 0036 ***	25	0739 0275 ***	4
B-EX 1900	19	9,5	0,76	0739 0009 ***	50	30	0739 0029 ***	25	0739 0280 ***	3
B-EX 2540	25,4	12,7	0,89	0739 0010 ***	50	30	0739 0030 ***	10	0739 0290 ***	2
B-EX 3200	32	16	0,89	0739 0011 ***	50	30	0739 0031 ***	10	-	-
B-EX 3800	38,1	19	1,02	0739 0012 ***	50	30	0739 0032 ***	10	-	-
B-EX 5100	50,8	25,4	1,14	0739 0013 ***	50	30	0739 0033 ***	10	-	-
B-EX 7500	76,2	38,1	1,27	0739 0014 010	25	-	0739 0034 010	10	-	-
B-EX 10200	101,6	50,8	1,4	0739 0015 010	25	-	0739 0035 010	10	-	-

* The sleeving in dispenser box ist not available in black (see page A4/5-02).

A4/90-01 - Bench support for PLIOFINE






• **PLIOFINE B-EX sleeves**

only available in black.

Any other colours and lengths are available upon request.

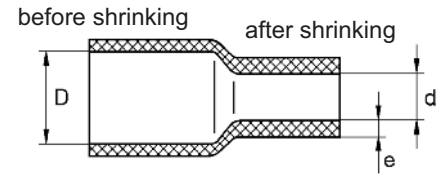

type / length	D mm	d mm	e mm	article number per length					Pces
				10 mm	15 mm	20 mm	30 mm	50 mm	
B-EX 120/**	1,2	0,6	0,45	0739 0059 010	0739 0071 010	0739 0083 010	0739 0108 010	-	1000
B-EX 160/**	1,6	0,8	0,45	0739 0060 010	0739 0072 010	0739 0084 010	0739 0109 010	-	1000
B-EX 240/**	2,4	1,2	0,51	0739 0061 010	0739 0073 010	0739 0085 010	0739 0110 010	-	1000
B-EX 320/**	3,2	1,6	0,51	0739 0062 010	0739 0074 010	0739 0086 010	0739 0111 010	-	1000
B-EX 480/**	4,8	2,4	0,51	-	0739 0075 010	0739 0087 010	0739 0112 010	-	1000
B-EX 640/**	6,4	3,2	0,64	-	-	0739 0088 010	0739 0113 010	-	1000/500
B-EX 950/**	9,5	4,8	0,64	-	-	-	0739 0114 010	-	500
B-EX 1270/**	12,7	6,4	0,64	-	-	-	0739 0115 010	-	500
B-EX 1600/**	16	8	0,76	-	-	-	0739 0118 010	0739 0166 010	500
B-EX 2540/**	25,4	12,7	0,89	-	-	-	0739 0117 010	0739 0165 010	500



• **Sleeves - Kit PLIOFINE**

Sturdy box for inside and outdoor use.

type	article number
Kit PLIOFINE with 376 sleeves in pack	0739 0301 000



Box containing the following range of sleeves type B-EX:

Sleeves refills

type / length mm	D mm	d mm	e mm	colour					quantity per box pieces	refills	
				black 010	white 001	blue 002	yellow 004	red 007		article number	pcs
B-EX 240/45	2,4	1,2	0,51	X		X		X	120	0739 0311 ***	100
B-EX 320/50	3,2	1,6	0,51	X	X	X	X	X	125	0739 0320 ***	100
B-EX 480/45	4,8	2,4	0,51			X	X	X	51	0739 0331 ***	50
B-EX 640/50	6,4	3,2	0,64			X	X	X	36	0739 0340 ***	25
B-EX 950/100	9,5	4,8	0,64	X				X	18	0739 0350 ***	25
B-EX 1270/100	12,7	6,4	0,64	X				X	14	0739 0360 ***	25
B-EX 1900/200	19	9,5	0,76	X				X	12	0739 0370 ***	25






PLIOFINE BX-F

Shrink ratio: 2/1

Material: cross-linked Polyolefin
Colours: white - yellow
Operating temperatures: -55 to +135°C
Min. shrink temperature: 120°C
Longitudinal change: ±5 % ASTM D2671
Flame resistance: self-extinguishing ASTM D2671
Fluid resistance: good to excellent ISO 1817, ISO 37 MIL-1-23053
Application: professional use

On special request, we can deliver the sleeving certified UL 224. Please contact us.

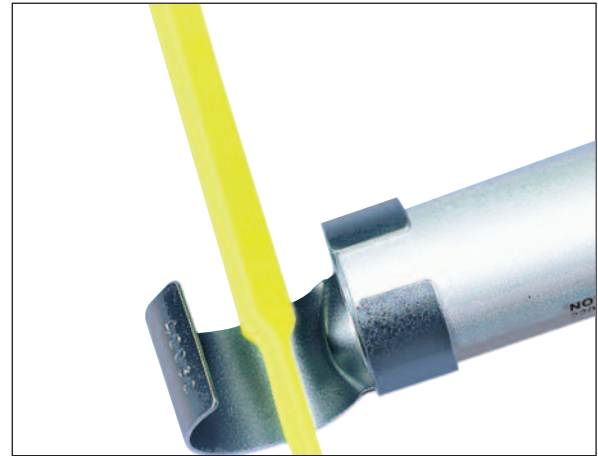


⚠ Sleeving adapted for thermal printing..

Standard colours:

001 004
 white yellow

Example for order:

code group	detail article	code colour
0739	xxxxxx	xx

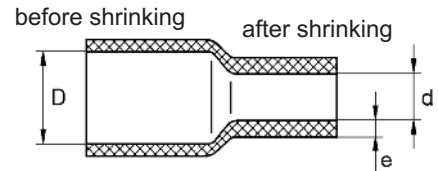

• On reel

type	article number	D mm	d mm	e mm	m
BX-F 320	0739 0404 ***	3,2	1,6	0,51	9
BX-F 480	0739 0405 ***	4,8	2,4	0,5	9
BX-F 640	0739 0406 ***	6,4	3,2	0,64	9
BX-F 950	0739 0407 ***	9,5	4,8	0,64	9
BX-F 1270	0739 0408 ***	12,7	6,4	0,64	7
BX-F 1600	0739 0409 ***	16	8	0,64	7
BX-F 1900	0739 0410 ***	19	9,5	0,76	7
BX-F 2540	0739 0411 ***	25,4	12,7	0,89	7



☛ Printing of the PLIOFINE BX-F with the PLIOSCRIB MX-10 (see page B13/20-01).






PLIOFINE BX-P

Shrink ratio: 2/1

Material:	cross-linked Polyolefin
Colours:	white - yellow
Operating temperatures:	-55 to +135°C
Min. shrink temperature:	+90°C
Longitudinal change:	±5 % SAE-AMS-DTL-23053
Flame resistance:	self-extinguishing UL224, VW-1
Fluid resistance:	good to excellent
Application:	professional use which conforms to the industrial and military specifications, especially to standards MIL-I-23053 class 3.

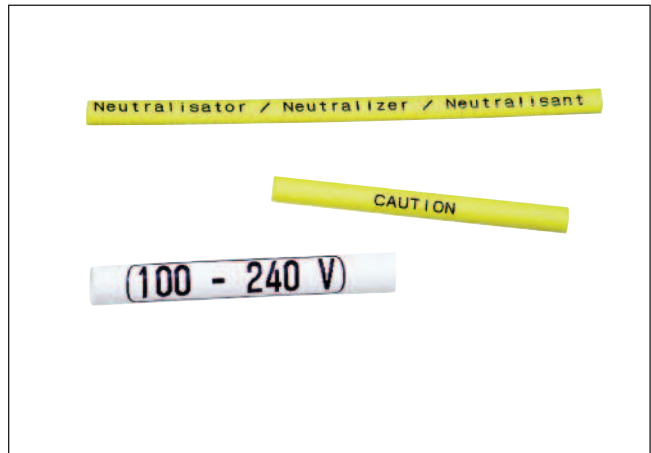

⚠ Sleeving adapted for thermal printing..

Standard colours:


001 004

white yellow

Example for order:

code group	detail article	code colour
0739	x x x x	x x x

• Cardboard reel

type	article number	D mm	d mm	e mm	 m
BX-P 240	0739 0423 ***	2,4	1,2	0,51	61
BX-P 320	0739 0424 ***	3,2	1,6	0,51	61
BX-P 480	0739 0425 ***	4,8	2,4	0,51	61
BX-P 640	0739 0426 ***	6,4	3,2	0,64	61

• Length of 1,22 m

pcs

BX-P 240	0739 0433 ***	2,4	1,2	0,51	25
BX-P 320	0739 0434 ***	3,2	1,6	0,51	25
BX-P 480	0739 0435 ***	4,8	2,4	0,51	25
BX-P 640	0739 0436 ***	6,4	3,2	0,64	25

The heat-shrinkable sleeving delivered in lengths is available in lengths or pack quantities.



B13/21-01: Printing of the PLIOFINE BX-P with the PLIOSCRIB M1-Pro.

(SES STERLING) (SES STERLING) (SES STERLING) (SES STERLING) (SES STERLING)

