

Hour meter DIN rail mounting – taxxo 403



PRODUCT DESCRIPTION

The taxxo 403 hour meter with AC intended for DIN rail mounting is available in different voltage variants. The device is equipped with undetachable screw terminals and operates mains synchronised within an ambient temperature of -20 °C ... + 55 °C. The meter can monitor up to 99,999.99 hours of operation. The product complies with the safety guidelines of protection class II and protection type IP20. taxxo is characterised by long-life and maintenance-free technology with robust and reliable design.


- ▶ Easy and quick installation




APPLICATION AREAS

- ▶ Machinery working time control
- ▶ Pumps working time control
- ▶ Effective runtime measurement of vehicles and machinery

DIMENSION DRAWINGS

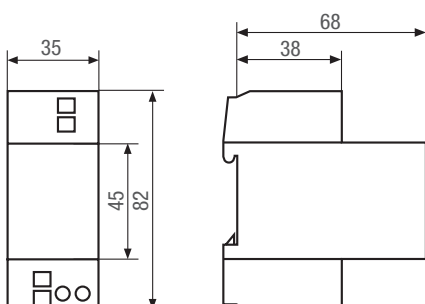

CIRCUIT DIAGRAM



TECHNICAL DATA

Electrical Data

Power consumption	1 VA
Accuracy	Mains synchronised

Electric connection

Device	Screw terminal with wire protection max. 2.5 mm ² Undetachable screw
--------	--

Display and format

Meter display	Analogue (7 digits) Hours
---------------	------------------------------

Operating conditions

Temperature (operation)	-20° C ... +55° C
-------------------------	-------------------

General data

Weight	90 g
Mounting	DIN rail

Standard compliance

Protection type	IP20
Protection class	II, according to corresponding mounting

PRODUCT VARIANTS

Item no. / EAN code 05.21.0002.1 / 4010940001780

Supply voltage	AC 110-120 V ± 10 % 50 Hz
Approval mark	CE, VDE

Item no. / EAN code 05.21.0003.1* / 4010940001797*

Supply voltage	AC 36-48 V ± 10 % 50 Hz
Approval mark	CE, VDE

Item no. / EAN code 05.21.0004.1* / 4010940001803*

Supply voltage	AC 18-26 V ± 10 % 50 Hz
Approval mark	CE, VDE

Item no. / EAN code 05.21.0009.1* / 4010940001810*

Supply voltage	AC 110-127 V ± 10 % 60 Hz
Approval mark	CE

Item no. / EAN code 05.21.0001.1 / 4010940001773

Supply voltage	AC 220-240 V ± 10 % 50 Hz
Approval mark	CE, VDE

Item no. / EAN code 05.21.0006.1 / 4010940007959

Supply voltage	AC 330-380 V ± 10 % 50 Hz
Approval mark	CE, VDE

* These product variants are only produced by order