

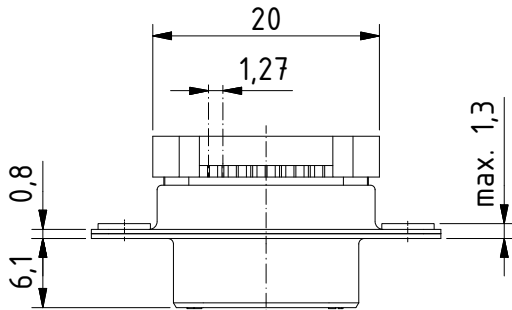



RoHS compliant

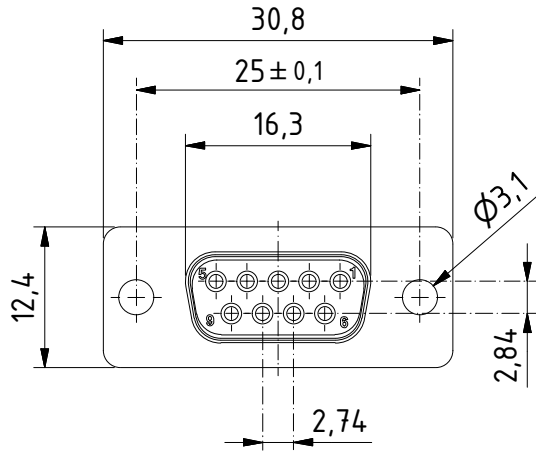

suitable for cable AWG 28-26

MATERIALS

- Insulator: Thermoplastic UL 94-V-0 grey
- Contact: Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

CHARAKTERISTICS

- Working voltage: 125V
- Current rating: 1A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55° to +125°C

General tolerances (Deltron standard)			
size in mm	> 0,5 up to 3	> 3 up to 6	> 6 up to 30
tolerances	±0,1	±0,2	±0,2
			±0,3

modification	Rev.	Rev.	Rev.	DE002227 part no.		
	Rev.	Rev.	Rev.			
DTS09SFC/2	1.5:1 scale	drawn	29.10.2009	mr		
		checked				
		approved				
 Industrie Neuhof 8c CH-3422 Kirchberg				K050164 drawing no.		