




**PLIOFINE B-EX-03** Shrink ratio : 3/1

**Material:** cross-linked Polyolefin  
**Operating temperature:** -55 to +135°C  
**Min. shrink temperature:** 120°C  
**Longitudinal change:** ±10% ASTM D2671  
**Dielectric strength:** 24 kV/mm VDE 0303 Part 2  
**Flammability:** self-extinguishing  
**Fluid resistance :** good to excellent  
**Certification :** UL 224 (colour)  
 FMVSS 302 (translucent)  
 MIL-DTL-23053/5  
**Application :** professional use

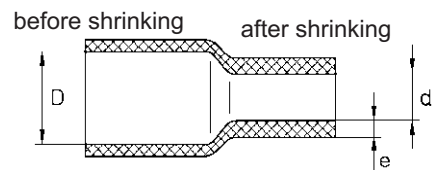

**• Cardboard reel**

type	article number per type and colour						D mm	d mm	e mm	m
	black 010	white 001	blue 002	yellow 004	red 007	natural 018				
<b>B-EX-03 150</b>	0747 0010 010	0747 0010 001	0747 0010 002	0747 0010 004	0747 0010 007	0747 0010 018	1,6	0,5	0,45	150
<b>B-EX-03 300</b>	0747 0011 010	0747 0011 001	0747 0011 002	0747 0011 004	0747 0011 007	0747 0011 018	3,2	1,0	0,55	150
<b>B-EX-03 480</b>	0747 0012 010	0747 0012 001	0747 0012 002	0747 0012 004	0747 0012 007	0747 0012 018	4,8	1,5	0,60	75
<b>B-EX-03 600</b>	0747 0013 010	0747 0013 001	0747 0013 002	0747 0013 004	0747 0013 007	0747 0013 018	6,4	2,0	0,65	75
<b>B-EX-03 900</b>	0747 0014 010	0747 0014 001	0747 0014 002	0747 0014 004	0747 0014 007	0747 0014 018	9,5	3,0	0,75	75
<b>B-EX-03 1200</b>	0747 0015 010	0747 0015 001	0747 0015 002	0747 0015 004	0747 0015 007	0747 0015 018	12,7	4,0	0,75	50
<b>B-EX-03 1800</b>	0747 0016 010	0747 0016 001	0747 0016 002	0747 0016 004	0747 0016 007	0747 0016 018	19,0	6,0	0,85	30
<b>B-EX-03 2400</b>	0747 0017 010	0747 0017 001	0747 0017 002	0747 0017 004	0747 0017 007	0747 0017 018	25,4	8,0	1,00	30
<b>B-EX-03 3900</b>	0747 0018 010	0747 0018 001	0747 0018 002	0747 0018 004	0747 0018 007	0747 0018 018	39,0	13,0	1,15	30

**• Length of 1,22 m**

type	art. no.	pce	D mm	d mm	e mm
	black 010				
<b>B-EX-03 150</b>	0747 0030 010	25	1,6	0,5	0,45
<b>B-EX-03 300</b>	0747 0031 010	25	3,2	1,0	0,55
<b>B-EX-03 480</b>	0747 0032 010	25	4,8	1,5	0,60
<b>B-EX-03 600</b>	0747 0033 010	10	6,4	2,0	0,65
<b>B-EX-03 900</b>	0747 0034 010	10	9,5	3,0	0,75
<b>B-EX-03 1200</b>	0747 0035 010	10	12,7	4,0	0,75
<b>B-EX-03 1800</b>	0747 0036 010	10	19,0	6,0	0,85
<b>B-EX-03 2400</b>	0747 0037 010	10	25,4	8,0	1,00

**• Dispenser box**

art. no.	m
0747 0050 010	11
0747 0051 010	8
0747 0052 010	7
0747 0053 010	6
0747 0054 010	4
0747 0055 010	3
0747 0056 010	3
0747 0057 010	2

A4/90-01 - Bench support for PLIOFINE

