DECEMBER 1972 - REVISED MARCH 1988

- Designed Specifically for High-Speed:
   Memory Decoders
   Data Transmission Systems
- 3 Enable Inputs to Simplify Cascading and/or Data Reception
- Schottky-Clamped for High Performance

#### description


These Schottky-clamped TTL MSI circuits are designed to be used in high-performance memory decoding or data-routing applications requiring very short propagation delay times. In high-performance memory systems, these docoders can be used to minimize the effects of system decoding. When employed with high-speed memories utilizing a fast enable circuit, the delay times of these decoders and the enable time of the memory are usually less than the typical access time of the memory. This means that the effective system delay introduced by the Schottky-clamped system decoder is negligible.

The 'LS138, SN54S138, and SN74S138A decode one of eight lines dependent on the conditions at the three binary select inputs and the three enable inputs. Two active-low and one active-high enable inputs reduce the need for external gates or inverters when expanding. A 24-line decoder can be implemented without external inverters and a 32-line decoder requires only one inverter. An enable input can be used as a data input for demultiplexing applications.


All of these decoder/demultiplexers feature fully buffered inputs, each of which represents only one normalized load to its driving circuit. All inputs are clamped with high-performance Schottky diodes to suppress line-ringing and to simplify system design.

The SN54LS138 and SN54S138 are characterized for operation over the full military temperature range of  $-55\,^{\circ}\text{C}$  to  $125\,^{\circ}\text{C}$ . The SN74LS138 and SN74S138A are characterized for operation from  $0\,^{\circ}\text{C}$  to  $70\,^{\circ}\text{C}$ .

SN54LS138, SN54S138.... J OR W PACKAGE SN74LS138, SN74S138A.... D OR N PACKAGE (TOP VIEW)




SN54LS138, SN54S138 . . . FK PACKAGE (TOP VIEW)



NC-No internal connection

#### logic symbols†

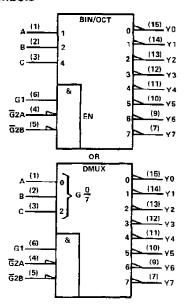

<sup>&</sup>lt;sup>†</sup>These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.


Pin numbers shown are for D, J, N, and W packages.



# SN54LS138, SN54S138, SN74LS138, SN74S138A 3-LINE-TO 8-LINE DECODERS/DEMULTIPLEXERS

logic diagram and function table

'LS138, SN54S138, SN74S138A

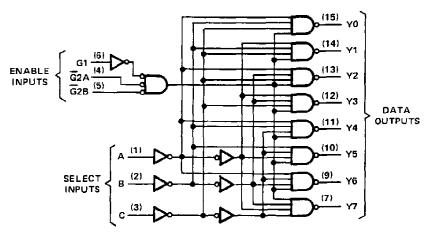

Pin numbers shown are for D, J, N, and W packages.

'LS138, SN54138, SN74S138A **FUNCTION TABLE** 

	1)	IPUT	S							~		
ENA	ENABLE SELECT				OUTPUTS							
G1	Ĝ2*	С	8	Α	YO	Y1	Y2	Υ3	Y4	Y5	Y6	<b>Y7</b>
Х	Н	×	×	×	Н	Н	Н	Н	Н	Н	Н	Н
L	X	х	Х	X	н	Н	Н	Н	Н	Н	Н	Н
н	L	L	L	L	L	н	Н	Н	Н	Н	Н	Н
Н	L	L	L	н	н	Ļ	Н	Н	Н	H	H	Н
Н	L	L	Н	L	н	н	L	Н	Н	Н	Н	H
н	L	L.	н	Н	н	н	н	L	Н	Н	H	Н
н	L	н	Ļ	L	Н	Н	Н	Н	L	Н	Н	Н
Н	L	H	L	Н	Н	Н	Н	Н	Н	Ļ	Н	H
н	L	н	Н	L	Н	Н	Н	H	Н	Н	L	Н
Н	Ł	Н	Н	Н	н	Н	н	Н	Н	H	Н	L

\* $\overline{G}2 = \overline{G}2A + \overline{G}2B$   $H \Rightarrow$  high level,  $L \Rightarrow$  low level,  $X \Rightarrow$  irrelevant

## schematics of inputs and outputs **EQUIVALENT OF EACH EQUIVALENT OF EACH** TYPICAL OF OUTPUTS **ENABLE INPUT OF 'LS138** OF 'L\$138 SELECT INPUT OF 'LS138 -vcc Vcc -120 Ω NOM Vcc-5 kΩ NOM 20 kΩ NOM INPUT OUTPUT INPUT -**EQUIVALENT OF EACH** TYPICAL OF OUTPUTS INPUT OF \$N54\$138, \$N74\$138A OF SN54S138, SN74S13BA -Vcc 50 Ω NOM Vcc -2.8 kΩ NOM INPUT OUTPUT

#### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, VCC (see Note 1)	٧
Input voltage	٧
Operating free-air temperature range: SN54LS138, SN54S138 55°C to 125°	С
SN74LS138, SN74S138A 0°C to 70°	Ç
Storage temperature range	С

NOTE 1: Voltage values are with respect to network ground terminal.

## SN54LS138, SN74LS138 3-LINE TO 8-LINE DECODERS/DEMULTIPLEXERS

### recommended operating conditions

	·	S	SN54L5138			N74LS1	38	UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	UNIT
Vcc	Supply voltage	4.5	5	5.5	4.75	5	5.25	V
VIH	High-level input voltage	2			2			V
V <sub>IL</sub>	Low-level input voltage			0.7			0.8	ν
lOH	High-level output current			-0.4			-0.4	mA
lOL	Low-level output current			4			8	mA
TA	Operating free-air temperature	- 55		125	0		70	°C

#### electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	S	N54LS1	38	S	N74LS1	38	UNIT	
PARAMETER	TEST CONDITIONS	MIN	TYP‡	MAX	MIN	TYP‡	MAX	וואט	
Vικ	V <sub>CC</sub> = MIN, I <sub>I</sub> = -18 mA				-1.5			-1.5	V
VoH	$V_{CC} = MIN$ , $V_{H} = 2 V$ , $V_{IL} = MAX$ $I_{OH} = -0.4 \text{ mA}$	,	2.5	3.4		2.7	3.4		٧
	V <sub>CC</sub> = MIN, V <sub>IH</sub> = 2 V,	IOL = 4 mA		0.25	0.4		0.25	0.4	.,
VOL	V <sub>IL</sub> = MAX	IOL = 8 mA					0.35	0.5	V
tj .	VCC = MAX. VI = 7 V		_	-	0.1			0.1	mA
lн	$V_{CC} = MAX$ , $V_{I} = 2.7 V$				20			20	μΑ
1	VCC = MAX, V <sub>I</sub> = 0.4 V	Enable			-0.4			-0.4	mΑ
կլ	ACC = MAY: A1 = 0.4 A	A, B, C			-0.2			-0.2	IIIA
los §	V <sub>CC</sub> = MAX		- 20		100	- 20		- 100	mA
<sup>I</sup> CC	V <sub>CC</sub> = MAX. Outputs enabled and open			6.3	10		6.3	10	mA

<sup>&</sup>lt;sup>†</sup> For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

### switching characteristics, VCC = 5 V, $T_A = 25 \text{ °C}$

PARAMETER <sup>§</sup>	FROM	TO (OUTPUT)	LEVELS	TEST CONDITIONS		SN54LS138 SN74LS138			
	(INPUT)		OF DELAY		MIN	TYP	MAX		
t <b>P</b> LH			2			11	20	ns	
<sup>t</sup> PHL	Binary	Any	} ~			18	41	ns	
t <sub>PLH</sub>	Select		3			21	27	ns	
tPHL				Rլ = 2 kΩ. Cլ = 15 pF	,	20	39	ns	
<sup>†</sup> PLH				See Note 2		12	18	ns	
tPHL	Enable	Any	2			20	32	пѕ	
tPLH			2			14	26	ns	
<sup>t</sup> PHL			3			13	38	ns	

TtpLH = propagation delay time, low-to-high-level outut



 $<sup>^{\</sup>ddagger}$  All typical values are at V<sub>CC</sub> = 5 V. T<sub>A</sub> = 25 °C.  $^{\$}$  Not more than one output should be shorted at a time, and duration of the short-circuit test should not exceed one second.

tpHL = propagation delay time, high-to-low-level output
NOTE 2: Load circuits and voltage waveforms are shown in Section 1.

#### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, VCC (see Note 1)	٧
Input voltage	٧
Operating free-air temperature range: SN54S13855°C to 125°	'n
SN74S138A	,C
Storage temperature range65 °C to 150 °	C,

NOTE 1: Voltage values are with respect to network ground terminal.

#### recommended operating conditions

		, s	SN54S138			V74S13	8A	TINU
		MIN	NOM	MAX	MIN	NOM	MAX	UNIT
Vcс	Supply voltage	4.5	5	5.5	4.75	5	5.25	V
VIH	High-level input voltage	2			2			V
VIL	Low-level input voltage			0.8			0.8	V
юн	High-level output current			- 1		_	-1	mA
loL	Low-level output current			20			20	mA
TA	Operating free-air temperature	- 55		125	0	·	70	°C

## electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS <sup>†</sup>	SN54S138 SN74S138A			UNIT	
				MIN	TYP <sup>‡</sup>	MAX	
Vικ	V <sub>CC</sub> = MIN,	I <sub> </sub> = -18 mA			_	-1.2	V
V	)/ NAINI	Viv. = 2 V Viv. = 0.9 V Inv. = 1 mA	SN54S'	2.5	3.4		٧
∨он	VCC = MIN,	$V_{IH} = 2 \text{ V},  V_{IL} = 0.8 \text{ V}.  I_{OH} = -1 \text{ mA}$	SN745'	2.7	3.4		v
VOL	V <sub>CC</sub> = MIN,	$V_{IH} = 2 \text{ V},  V_{IL} = 0.8 \text{ V},  I_{OL} = 20 \text{ mA}$				0.5	V
l <sub>l</sub>	V <sub>CC</sub> = MAX,	$V_{  } = 5.5 \text{ V}$				1	mA
lН	VCC = MAX.	V <sub>I</sub> = 2.7 V				50	μА
ll	V <sub>CC</sub> = MAX,	V <sub>1</sub> = 0.5 V				- 2	mΑ
los §	VCC = MAX			-40		- 100	mΑ
icc	V <sub>CC</sub> = MAX.	Outputs enabled and open			49	74	mA

<sup>†</sup> For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

 $<sup>^{\</sup>ddagger}$  All typical values are at V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25 °C.

Not more than one output should be shorted at a time, and duration of the short circuit test should not exceed one second.

## SN54S138, SN74S13BA 3-LINE TO 8-LINE DECODERS/DEMULTIPLEXERS

## switching characteristics, VCC = 5 V, TA = 25 °C

PARAMETER <sup>†</sup>	FROM	TO (OUTPUT)	LEVELS OF DELAY	TEST CO	4	38 8A	UNIT		
	(INPUT)					MIN	TYP	MAX	' I
tPLH							4.5	7	ns
<sup>t</sup> PHL	Binary	<b>a</b>	2	1			7	10.5	ns
<sup>t</sup> PLH	Select	Any	3	]			7.5	12	ns
tPHL		}		$R_{L} = 280 \Omega$	$C_L = 15 pF$ ,		8	12	ns
tPLH			2	See Note 2			5	8	กร
tpHL	Enable		2	1		F T	7	11	ns
<sup>t</sup> PLH		Any	3	}			. 7	11	ns
tPHL		<u> </u>		}			7	11	ns

<sup>†</sup>tpLH = propagation delay time, low-to-high-level output tpHL = propagation delay time, high-to-low-level output NOTE 2: Load circuits and voltage waveforms are shown in Section 1.



www.ti.com 11-Nov-2009

### **PACKAGING INFORMATION**

Ordera	able Device	Status <sup>(1)</sup>	Package Type	Package Drawing	Pins	Package Qty	Eco Plan <sup>(2)</sup>	Lead/Ball Finish	MSL Peak Temp <sup>(3)</sup>
760	005012A	ACTIVE	LCCC	FK	20	1	TBD	POST-PLATE	N / A for Pkg Type
760	00501EA	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type
760	00501FA	ACTIVE	CFP	W	16	1	TBD	A42	N / A for Pkg Type
760	041012A	ACTIVE	LCCC	FK	20	1	TBD	POST-PLATE	N / A for Pkg Type
760	)4101EA	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type
760	)4101FA	ACTIVE	CFP	W	16	1	TBD	A42	N / A for Pkg Type
JM3851	0/07701BEA	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type
JM3851	0/07701BFA	ACTIVE	CFP	W	16	1	TBD	A42	N / A for Pkg Type
JM3851	0/30701B2A	ACTIVE	LCCC	FK	20	1	TBD	POST-PLATE	N / A for Pkg Type
JM3851	0/30701BEA	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type
JM3851	0/30701BFA	ACTIVE	CFP	W	16	1	TBD	A42	N / A for Pkg Type
JM3851	0/30701SEA	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type
JM3851	0/30701SFA	ACTIVE	CFP	W	16	1	TBD	A42	N / A for Pkg Type
SN5	34LS138J	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type
SN	54S138J	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type
SN7	4LS138D	ACTIVE	SOIC	D	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74	LS138DE4	ACTIVE	SOIC	D	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74	LS138DG4	ACTIVE	SOIC	D	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74	ILS138DR	ACTIVE	SOIC	D	16	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74L	S138DRE4	ACTIVE	SOIC	D	16	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74L	.S138DRG4	ACTIVE	SOIC	D	16	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN7	4LS138N	ACTIVE	PDIP	N	16	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type
SN74	4LS138N3	OBSOLETE	PDIP	N	16		TBD	Call TI	Call TI
SN74	LS138NE4	ACTIVE	PDIP	N	16	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type
SN74	LS138NSR	ACTIVE	SO	NS	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74L	S138NSRE4	ACTIVE	SO	NS	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74LS	S138NSRG4	ACTIVE	SO	NS	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN7	4S138AD	ACTIVE	SOIC	D	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74	S138ADE4	ACTIVE	SOIC	D	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN74	S138ADG4	ACTIVE	SOIC	D	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
SN7	4S138AN	ACTIVE	PDIP	N	16	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type
SN74	1S138AN3	OBSOLETE	PDIP	N	16		TBD	Call TI	Call TI



#### PACKAGE OPTION ADDENDUM

www.ti.com 11-Nov-2009

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish	MSL Peak Temp <sup>(3)</sup>
SN74S138ANE4	ACTIVE	PDIP	N	16	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type
SNJ54LS138FK	ACTIVE	LCCC	FK	20	1	TBD	POST-PLATE	N / A for Pkg Type
SNJ54LS138J	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type
SNJ54LS138W	ACTIVE	CFP	W	16	1	TBD	A42	N / A for Pkg Type
SNJ54S138FK	ACTIVE	LCCC	FK	20	1	TBD	POST-PLATE	N / A for Pkg Type
SNJ54S138J	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type
SNJ54S138W	ACTIVE	CFP	W	16	1	TBD	A42	N / A for Pkg Type

<sup>(1)</sup> The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

**Pb-Free** (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

PACKAGE MATERIALS INFORMATION

www.ti.com 29-Jul-2009


### TAPE AND REEL INFORMATION





	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

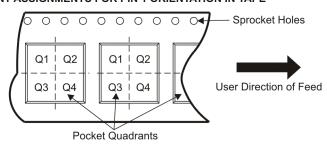

#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74LS138DR	SOIC	D	16	2500	330.0	16.4	6.5	10.3	2.1	8.0	16.0	Q1
SN74LS138NSR	SO	NS	16	2000	330.0	16.4	8.2	10.5	2.5	12.0	16.0	Q1

www.ti.com 29-Jul-2009



\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74LS138DR	SOIC	D	16	2500	333.2	345.9	28.6
SN74LS138NSR	SO	NS	16	2000	346.0	346.0	33.0

### **MECHANICAL DATA**

## NS (R-PDSO-G\*\*)

## 14-PINS SHOWN

#### PLASTIC SMALL-OUTLINE PACKAGE



- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.



#### FK (S-CQCC-N\*\*)

#### **28 TERMINAL SHOWN**

#### **LEADLESS CERAMIC CHIP CARRIER**



NOTES: A. All linear dimensions are in inches (millimeters).

- B. This drawing is subject to change without notice.
- C. This package can be hermetically sealed with a metal lid.
- D. The terminals are gold plated.
- E. Falls within JEDEC MS-004



## 14 LEADS SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package is hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
- E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

## W (R-GDFP-F16)

## CERAMIC DUAL FLATPACK



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package can be hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only.
- E. Falls within MIL STD 1835 GDFP1-F16 and JEDEC MO-092AC



## D (R-PDS0-G16)

### PLASTIC SMALL-OUTLINE PACKAGE



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 (0,15) per end.
- Body width does not include interlead flash. Interlead flash shall not exceed .017 (0,43) per side.
- E. Reference JEDEC MS-012 variation AC.



## D(R-PDSO-G16)



- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Refer to IPC7351 for alternate board design.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC—7525
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



## N (R-PDIP-T\*\*)

## PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
- The 20 pin end lead shoulder width is a vendor option, either half or full width.



#### IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications				
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio			
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive			
DLP® Products	www.dlp.com	Communications and Telecom	www.ti.com/communications			
DSP	<u>dsp.ti.com</u>	Computers and Peripherals	www.ti.com/computers			
Clocks and Timers	www.ti.com/clocks	Consumer Electronics	www.ti.com/consumer-apps			
Interface	interface.ti.com	Energy	www.ti.com/energy			
Logic	logic.ti.com	Industrial	www.ti.com/industrial			
Power Mgmt	power.ti.com	Medical	www.ti.com/medical			
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security			
RFID	www.ti-rfid.com	Space, Avionics & Defense	www.ti.com/space-avionics-defense			
RF/IF and ZigBee® Solutions	www.ti.com/lprf	Video and Imaging	www.ti.com/video			
		Wireless	www.ti.com/wireless-apps			