

# HLG-120H series

**△** ⊗ **CB** (€



8

#### Features :

- Universal AC input / Full range (up to 305VAC)
- Built-in active PFC function
- High efficiency up to 93.5%
- Protections: Short circuit / Over current / Over voltage / Over temperature
- · Cooling by free air convection
- OCP point adjustable through output cable or internal potentiometer
- · IP67 / IP65 design for indoor or outdoor installations
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting and street lighting applications
- Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet locations
- 5 years warranty (Note.9) SELV IP65 IP67 🕞 🔊 🖾 🗉



# HLG-120H-12 A Blank : IP67 rated. Cable for I/O connection.

110

M

M/

F

A : IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.


 $B: IP67\ rated.\ Constant\ current\ level\ adjustable\ through\ output\ cable\ with\ 1\sim 10Vdc\ or\ 10V\ PWM\ signal\ or\ resistance.$ 

D (option) : IP67 rated. Timer dimming function, contact MEAN WELL for details.


#### SPECIFICATION

				1			1	1		r			
MODEL		HLG-120H-12	HLG-120H-15	HLG-120H-20	HLG-120H-24	HLG-120H-30	HLG-120H-36	HLG-120H-42	HLG-120H-48	HLG-120H-54			
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V			
OUTPUT	RATED CURRENT	10A	8A	6A	5A	4A	3.4A	2.9A	2.5A	2.3A			
	RATED POWER	120W	120W	120W	120W	120W	122.4W	121.8W	120W	124.2W			
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p			
	VOLTAGE ADJ. RANGE Note.5	10.8 ~ 13.5V	13.5 ~ 17V	17~22V	22~27V	27~33V	33~40V	38~46V	43~53V	49~58V			
		Can be adjust	ed by internal	potentiometer (	or through out	out cable							
	CURRENT ADJ. RANGE	5~10A	4 ~ 8A	3~6A	2.5~5A	2~4A	1.7~3.4A	1.4 ~ 2.9A	1.2 ~ 2.5A	1.1~2.3A			
	VOLTAGE TOLERANCE Note.3	±2.5%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%			
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%			
	LOAD REGULATION	±2.0%	±1.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%			
	SETUP, RISE TIME Note.7	2500ms, 50m	s at full load	230VAC / 115\	/AC;B type	2500ms, 200m	s at 95% load	230VAC / 11	5VAC				
	HOLD UP TIME (Typ.)	12ms at full load 230VAC / 115VAC											
		90 ~ 305VAC 127 ~ 431VDC											
	FREQUENCY RANGE	47 ~ 63Hz											
	POWER FACTOR (Typ.)	PF>0.98/115VAC, PF>0.95/230VAC, PF>0.93/277VAC at full load (Please refer to "Power Factor Characteristic" curve)											
INPUT	EFFICIENCY (Typ.)	92%	92%	93%	93%	93%	93%	93%	93.5%	93.5%			
	AC CURRENT (Typ.)	1.4A/115VAC 0.6A/230VAC 0.55A/277VAC											
	INRUSH CURRENT (Typ.)	COLD START 75A/230VAC											
	LEAKAGE CURRENT	<0.75mA / 277VAC											
		95 ~ 108%											
	OVER CURRENT	Protection type : Constant current limiting, recovers automatically after fault condition is removed											
	SHORT CIRCUIT	Constant current limiting, recovers automatically after fault condition is removed											
PROTECTION		14 ~ 17V	18~21V	23 ~ 27V	28 ~ 34V	34 ~ 38V	41~46V	47~53V	54 ~ 60V	59 ~ 65V			
	OVER VOLTAGE	Protection type : Shut down o/p voltage with auto-recovery or re-power on to recovery											
		85°C ±10°C (RTH2)											
	OVER TEMPERATURE	Protection type : Shut down o/p voltage, recovers automatically after temperature goes down											
	WORKING TEMP.	-40 ~ +70°C (Refer to "Derating Curve")											
	WORKING HUMIDITY	20 ~ 95% RH non-condensing											
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C , 10 ~ 95% RH											
	TEMP. COEFFICIENT	±0.03%/°C (0~50°C)											
	VIBRATION												
	VIDICATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes UL8750, CSA C22.2 No. 250.0-08, EN61347-1, EN61347-2-13 independent IP65 or IP67, J61347-1, J61347-2-13 a											
	SAFETY STANDARDS Note.6	design refer to UL60950-1, TUV EN60950-1											
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC											
EMC	ISOLATION RESISTANCE												
LING	EMC EMISSION	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH											
		Compliance to EN55015, EN55022 (CISPR22) Class B, EN61000-3-2 Class C (≥50% load) ; EN61000-3-3											
	EMC IMMUNITY MTBF	Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, EN55024, light industry level (surge 4KV), criteria A 192.2Khrs min. MIL-HDBK-217F (25°C)											
OTHERS		220*68*38.8mm (L*W*H)											
OTHERS	DIMENSION		. ,										
	PACKING		s/14.4Kg/0.8C		out rated load	hand 25°C of	ambiont tompo	oraturo					
NOTE	<ol> <li>All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</li> <li>Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</li> <li>Tolerance : includes set up tolerance, line regulation and load regulation.</li> </ol>												
		p toterance, line regulation and load regulation. under low input voltages. Please check the static characteristics for more details.											
	5. Type A only.		Ū										
	6. Safety and EMC design ref						to increase of	the est up time	2				
	<ol> <li>Length of set up time is me</li> <li>The power supply is consid</li> </ol>									ffected by t			
	complete installation, the fir	nal equipment								,			
	9. Refer to warranty statemen	t.											




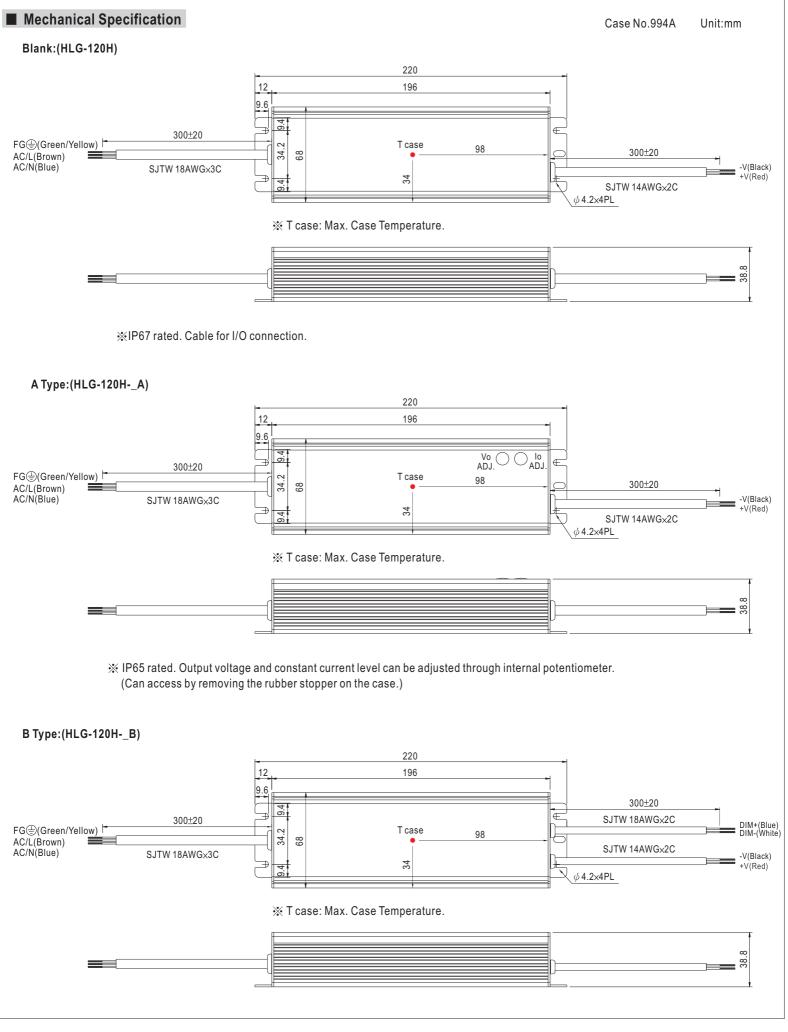



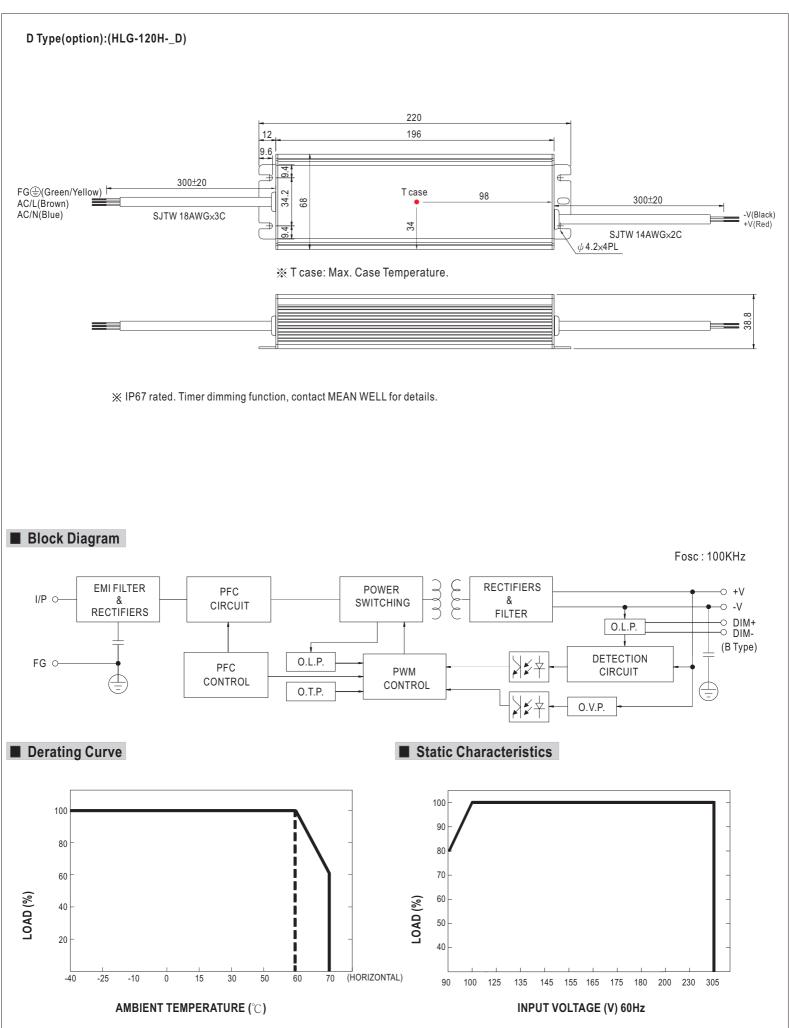


## Power Factor Characteristic

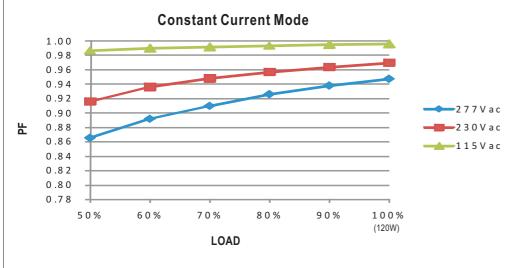

## EFFICIENCY vs LOAD (48V Model)


 ${\rm HLG-120H}\ {\rm series}\ {\rm possess}\ {\rm superior}\ {\rm working}\ {\rm efficiency}\ {\rm that}\ {\rm up}\ {\rm to}\ {\rm 93.5\%}\ {\rm can}\ {\rm be}\ {\rm reached}\ {\rm in}\ {\rm field}\ {\rm applications}.$ 

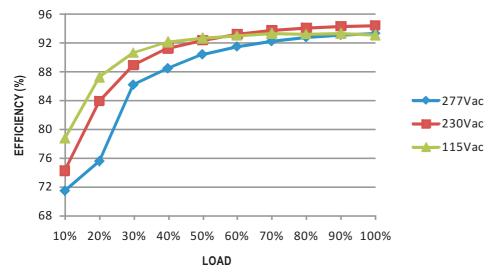

# DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs. Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).



Typical LED power supply I-V curve



### ■ DIMMING OPERATION



※ Built-in 3 in 1 dimming function, IP67 rated. Output constant current level can be adjusted through output cable by connecting a resistance or 1 ~ 10Vdc or 10V PWM signal between DIM+ and DIM-.

※ Please DO NOT connect "DIM-" to "-V".

※ Reference resistance value for output current adjustment (Typical)

Resistance value	<b>10K</b> Ω	<b>20Κ</b> Ω	<b>30Κ</b> Ω	<b>40Κ</b> Ω	<b>50Κ</b> Ω	<b>60K</b> Ω	<b>70Κ</b> Ω	<b>80K</b> Ω	<b>90Κ</b> Ω	<b>100K</b> Ω	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	102%~108%
× 1 ~ 10V dimming function for output current adjustment (Typical)											
Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	102%~108%


※ 10V PWM signal for output current adjustment (Typical): Frequency range :100Hz ~ 3KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	102%~108%

XUsing the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.

%Direct connecting to LEDs is suggested, but is not suitable for using additional drivers.

Dimming connection diagram for turning the lighting fixture ON/OFF :

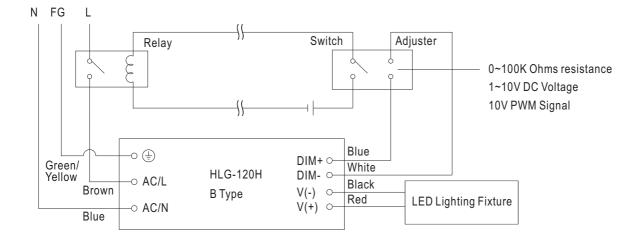

Using a switch and relay can turn ON/OFF the lighting fixture.

1. Output constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-. 2. The LED lighting fixture can be turned ON/OFF by the switch.



#### WATERPROOF CONNECTION

 $\odot$  Waterproof connector

Waterproof connector can be assembled on the output cable of HLG-120H to operate in dry/wet/damp or outdoor environment.

