



Data Sheet 1291 Rev.A

Features

- Diffused Junction
- Low Forward Voltage Drop
- High Current Capability
- High Reliability
- High Surge Current Capability
- Ideal for Printed Circuit Boards
- UL Recognized File # E223064



WOB				
Dim	Min	Max	Min	Max
A	8.60	9.10	0.339	0.358
B	5.0	5.50	0.197	0.217
C	27.9	—	1.098	—
D	25.4	—	1	—
E	0.71	0.81	0.028	0.032
G	4.60	5.60	0.181	0.220
	In mm		In inch	



Mechanical Data

- Case: Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: As Marked on Body
- Weight: 1.1 grams (approx.)
- Mounting Position: Any
- Marking: Type Number

Maximum Ratings and Electrical Characteristics @T_A=25°C unless otherwise specified

Single Phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Characteristic	Symbol	B40C 1500	B80C 1500	B125C 1500	B250C 1500	B380C 1500	B500C 1500	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RRM} V _{RWM} V _R	100	200	300	600	900	1200	V
Input Voltage Recommended	V _{R(RMS)}	40	80	125	250	380	500	V
Average Rectified Output Current (Note 1) @T _A = 50°C	I _o	1.5						A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	50						A
Forward Voltage (per element) @I _F = 1.5A	V _{FM}	1.0						V
Peak Reverse Current @T _A = 25°C At Rated DC Blocking Voltage @T _A = 100°C	I _{RM}	10 500						μA
Operating Temperature Range	T _j	-55 to +125						°C
Storage Temperature Range	T _{STG}	-55 to +150						°C

Note: 1. Leads maintained at ambient temperature at a distance of 9.5mm from the case.

Data Sheet 1291 Rev.A

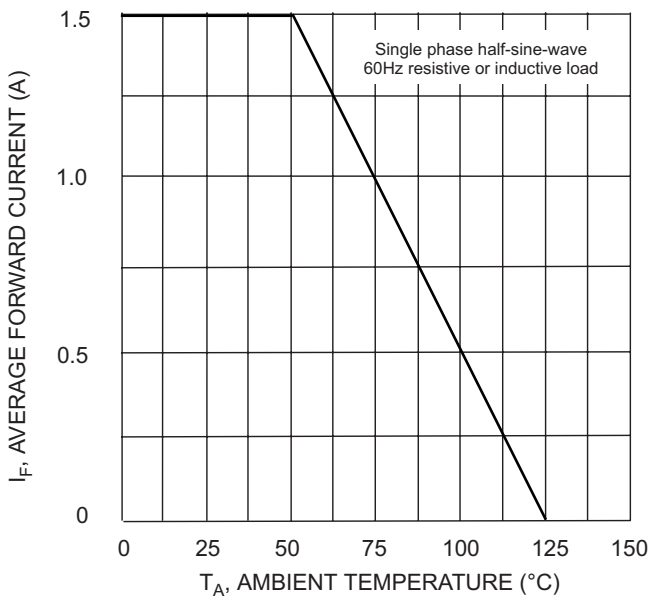


Fig. 1 Forward Current Derating Curve

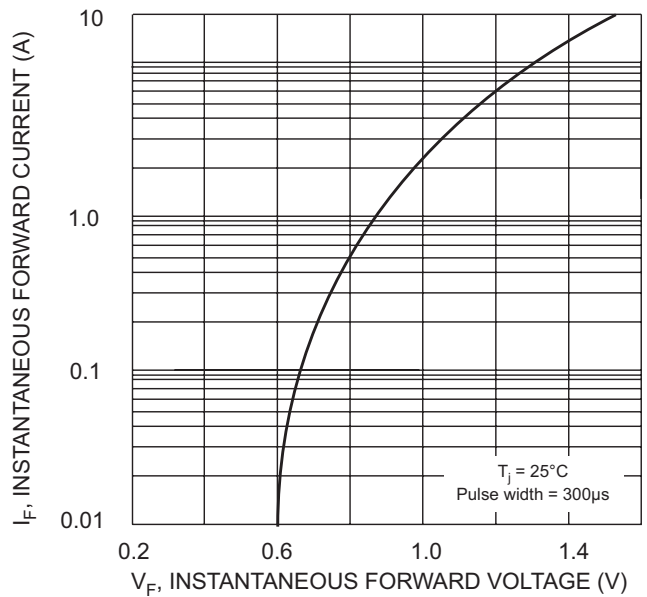


Fig. 2 Typical Forward Characteristics, per element

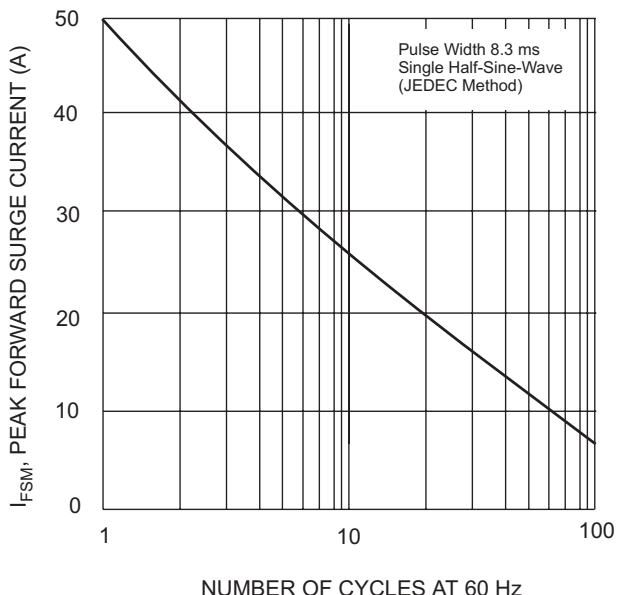


Fig. 3 Max Non-Repetitive Surge Current

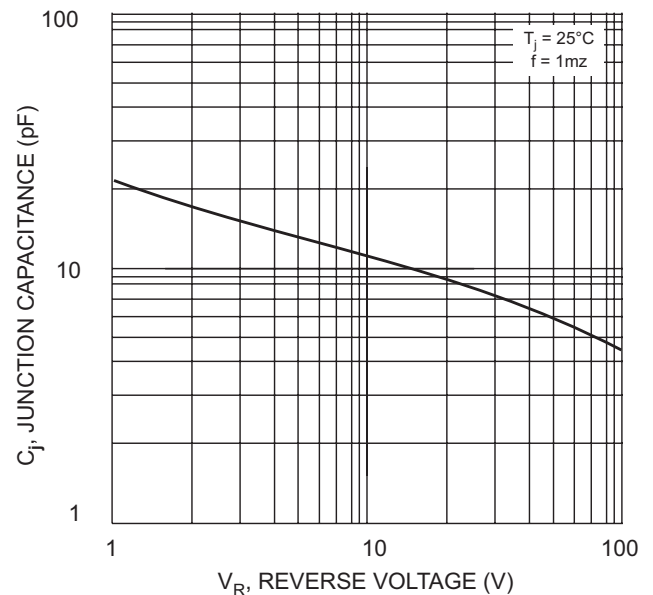


Fig. 4 Typical Junction Capacitance